

SNR-SFP-T-V2

10/100/1000BASE-T Copper SFP Transceiver with SGMII interface
RoHS6 Compliant

Features

- ◆ Support 10/100/1000BASE-T Operation in Host Systems with SGMII interface
- ◆ 100m transmission over Cat 5 UTP Cable
- ◆ Hot-Pluggable SFP Footprint
- ◆ Fully metallic enclosure for low EMI
- ◆ Low power dissipation (1.05 W typical)
- ◆ Compact RJ-45 connector assembly
- ◆ Access to physical layer IC via 2-wire serial bus
- ◆ Detailed product information in EEPROM
- ◆ Operating Case Temperature

Standard: 0°C~70°C

Industrial: -40°C~85°C



Applications

- ◆ LAN 10/100/1000Base-T
- ◆ Gigabit Ethernet over Cat 5 Cable
- ◆ Switch to Switch Interface
- ◆ Router/Server Interface

Order Information

Part No.	Data Rate	Link type	Distance	Connector	Temperature
SNR-SFP-T-V2	10/100/1000M	Cat5	100m	RJ45	Standard

Note1: Standard version

Regulatory Compliance

Feature	Standard	Performance
Electrostatic Discharge (ESD) to the Electrical Pins	MIL-STD-883G Method 3015.7	Class 1C (>1000V)
Electrostatic Discharge to the enclosure	EN 55024:1998+A1+A2 IEC-61000-4-2 GR-1089-CORE	Compatible with standards
Electromagnetic Interference (EMI)	FCC Part 15 Class B EN55022:2006 CISPR 22B :2006 VCCI Class B	Compatible with standards Noise frequency range: 30MHz to 6GHz. Good system EMI design practice required to achieve Class B margins. System margins are dependent on customer host board and chassis design.
Immunity	EN 55024:1998+A1+A2 IEC 61000-4-3	Compatible with standards. 1KHz sine-wave, 80% AM, from 80MHz to 1GHz. No effect on transmitter/receiver performance is detectable between these limits.
RoHS6	2002/95/EC 4.1&4.2 2005/747/EC 5&7&13	Compliant with standards ^{*note3}

Note2: For update of the equipments and strict control of raw materials, SNR has the ability to supply the customized products since Jan 1, 2007, which meet the requirements of RoHS6 (Restrictions on use of certain Hazardous Substances) of European Union.

In light of item 5 in RoHS exemption list of RoHS Directive 2002/95/EC, Item 5: Lead in glass of cathode ray tubes, electronic components and fluorescent tubes.

In light of item 13 in RoHS exemption list of RoHS Directive 2005/747/EC, Item13: Lead and cadmium in optical and filter glass. The three exemptions are being concerned for SNR's transceivers, because SNR's transceivers use glass, which may contain Pb, for components such as lenses, windows, isolators, and other electronic components.

Product Description

SNR-SFP-T-V2 is a 10/100/1000BASE-T Copper Small Form Pluggable (SFP), which is based on the SFP Multi Source Agreement (MSA). It is compliant with the Gigabit Ethernet standard as specified in IEEE STD 802.3 and can fully satisfy the 10/100/1000BASE-T application.

Absolute Maximum Ratings

Parameter	Symbol	Min	Typ	Max
Maximum Supply Voltage	V _{cc}	-0.5		4.0
Storage Temperature	T _s	-40		85

Normal operating condition

Parameter	Symbol	Min	Typ	Max	Units	Ref.
Operating Case Temperature	Top	0		70	°C	Standard
		-40		85		Industrial
Supply Voltage	V _{cc}	3.15	3.3	3.45	V	
Date Rate		10		1000	Mbps	*Note3

*Note3: 10/100/1000 BASE-T operation requires an SGMII interface with no clocks in the host system, and the module will operate as 1000BASE-T when the host system uses SERDES interface. It depends on the module PHY configuration.

Electrical Characteristics

Parameter	Symbol	Min	Typ	Max	Units	Notes/Conditions
+3.3 Volt Electrical Power Interface						
Supply Current	I _{cc}		300	350	mA	
Input Voltage	V _{cc}	3.15	3.3	3.45	V	
Surge Current	I _{surge}			30	mA	
Low-Speed Signals, Electronic Characteristics						
SFP Output LOW	V _{OL}	0		0.5	V	4.7k to 10k pull-up to host_V _{cc} , measured at host side of connector
SFP Output HIGH	V _{OH}	host_V _{cc} -0.5		host_V _{cc} +0.3	V	4.7k to 10k pull-up to host_V _{cc} , measured at host side of connector
SFP Input LOW	V _{IL}	0		0.8	V	4.7k to 10k pull-up to V _{cc} , measured at SFP side of connector
SFP Input HIGH	V _{IH}	2		V _{cc} + 0.3	V	4.7k to 10k pull-up to V _{cc} , measured at SFP side of connector
High-Speed Electrical Interface, Transmission Line-SFP						
Line Baud Rates	f _L		1250		MHz	5-level encoding, per IEEE 802.3
TX Output impedance	Z _{out, TX}		100		Ohm	Differential, for all frequencies between 1MHz and 1250MHz
RX Input Impedance	Z _{in, RX}		100		Ohm	Differential, for all frequencies between 1MHz and 1250MHz
High-Speed Electrical Interface, Host-SFP						
Single ended data input swing	V _{in}	250		1200	mV	Single ended

Single ended data output swing	Vout	350		800	mV	Single ended
Rise/Fall Time	Tr, Tf		175		psec	20%-80%
TX Input Impedance	Zin		50		Ohm	Single ended
RX Output Impedance	Zout		50		Ohm	Single ended

General specifications

Parameter	Symbol	Min	Typ	Max	Units	Notes/Conditions
Data rate		10		1000	Mbps	
Distance				100	m	Category 5 UTP. BER <10 ⁻¹²


Pin Descriptions

Pin No.	Name	Function	Plug Seq.	Notes
1	VeeT	Transmitter Ground	1	
2	TX Fault	Transmitter Fault Indication	3	Not used
3	TX Disable	Transmitter Disable	3	1
4	MOD-DEF2	Module Definition 2	3	2
5	MOD-DEF1	Module Definition 1	3	2
6	MOD-DEF0	Module Definition 0	3	2
7	Rate Select	Not Connected	3	
8	LOS	Loss of Signal	3	Not Used
9	VeeR	Receiver Ground	1	
10	VeeR	Receiver Ground	1	
11	VeeR	Receiver Ground	1	
12	RD-	Inv. Received Data Out	3	
13	RD+	Received Data Out	3	
14	VeeR	Receiver Ground	1	
15	VccR	Receiver Power	2	
16	VccT	Transmitter Power	2	
17	VeeT	Transmitter Ground	1	
18	TD+	Transmit Data In	3	
19	TD-	Inv. Transmit Data In	3	
20	VeeT	Transmitter Ground	1	

Notes:

- PHY disabled on T_{DIS} > 2.0V or open, enabled on T_{DIS} < 0.8V, used to reset the module.
- Should be pulled up with 4.7k – 10k ohm on host board to a voltage between 2.0 V and 3.6 V.
MOD_DEF (0) pulls line low to indicate module is plugged in.

The following is the Diagram of host board connector pin numbers and names

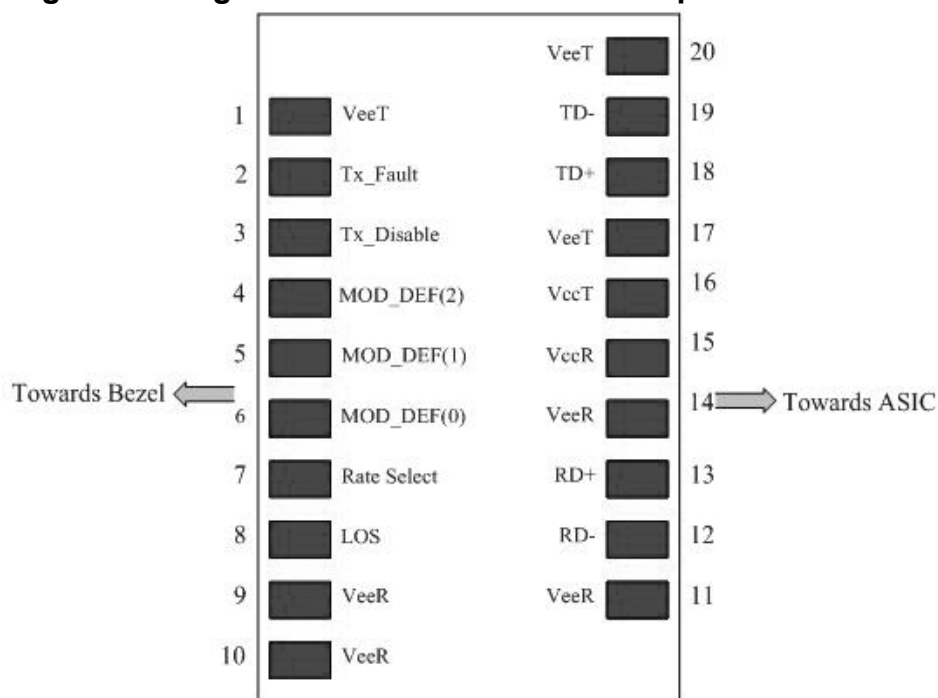

Serial Communication Protocol

SNR Copper SFP support the 2-wire serial communication protocol defined in the SFP MSA. These SFP use a 128 byte EEPROM with an address of A0H. The 10/100/1000BASE-T physical layer IC can also be accessed via the 2-wire serial bus at address ACH.

EEPROM Serial ID Memory Contents

Accessing Serial ID Memory uses the 2 wire address 1010000X (A0H). Memory Contents of Serial ID are shown in Table 1.

Table 1 Serial ID Memory Contents

Addr.	Size (Bytes)	Name of Field	Hex	Description
BASE ID FIELDS				
0	1	Identifier	03	SFP
1	1	Ext. Identifier	04	SFP function is defined by serial ID only
2	1	Connector	22	RJ-45
3-10	8	Transceiver	00 00 00 08 00 00 00 00	Transceiver Code
11	1	Encoding	01	
12	1	BR, Nominal	0D	
13	1	Reserved	00	
14	1	Length (9µm)km	00	Transceiver transmit distance
15	1	Length(9µm)100m	00	
16	1	Length (50µm) 10m	00	
17	1	Length(62.5µm)10 m	00	

18	1	Length (Copper)	64	100m
19	1	Reserved	00	
20-35	16	Vendor name	XX XX XX XX XX XX XX XX XX ^(note3) 20 20 20 20 20 20 20 20	Vendor name (ASCII)
36	1	Reserved	00	
37-39	3	Vendor OUI	XX XX XX ^(note4)	
40-55	16	Vendor PN	XX XX XX XX XX XX XX XX XX XX XX XX XX XX XX XX XX XX ^(note3)	Transceiver part number
56-59	4	Vendor rev	XX XX XX XX ^(note4)	
60-61	2	Wavelength	00	
62	1	Reserved	00	
63	1	CC_BASE	Check Sum (Variable)	Check code for Base ID Fields
EXTENDED ID FIELDS				
64-65	2	Options	00 00	TX_DISABLE, TX_FAULT and Loss of Signal implemented.
66	1	BR,max	00	
67	1	BR,min	00	
68-83	16	Vendor SN	XX XX XX XX XX XX XX XX XX 20 20 20 20 20 20 20 20 ^(note4)	Serial Number of transceiver (ASCII). For example "B000822".
84-91	8	Date code	XX XX XX XX XX XX XX XX XX ^(note4)	Manufacture date code. For example "080405".
92	1	Diagnostic Monitoring Type	XX ^(note4)	Digital diagnostic monitoring implemented
93	1	Enhanced Options	XX ^(note4)	Optional flags
94	1	SFF_8472 Compliance	XX ^(note4)	01 for diagnostics (Rev9.3 SFF-8472).
95	1	CC_EXT	Check Sum (Variable)	Check sum for Extended ID Field.
VENDOR SPECIFIC ID FIELDS				
96-127	32	Vendor Specific	Read only	Depends on customer information
128-255	128	Reserved	Read only	

Note4: The "XX" byte should be filled in according to practical case. For more information, please refer to the related document of SFP Multi-Source Agreement (MSA)

Recommended Software configuration

How to enable SNR-SFP-T-V2 work at 1000BASE-T

SNR-SFP-T-V2 supports 10/100/1000Mbps full duplex SGMII interface default. But it also can operate with 1000Mbps of SERDES operation.

Please refer the following steps to configure:

Step 1: Access the PHY at 0xAC via two-wire serial interface.

Step 2: Configure 0xAC as below table

PHY Address: 0xAC		
Register Address	Write data	Description
0x16	0x0001	Select page 1

0x1B	0x9088	Enable SerDes mode
0x00	0x9140	Software reset to allow changes to take effect
0x16	0x0000	Select page 0

How to disable Auto-negotiation on SNR-SFP-T-V2

SNR-SFP-T-V2 operates at mode of “Auto-negotiation enable” default. But it also can operate with “Auto-negotiation disable”. Please refer the following steps to configure:


Step 1: Access the PHY at 0xAC via two-wire serial interface.

Step 2: Configure 0xAC as below table

PHY Address: 0xAC		
Register Address	Write data	Description
0x16h	0x0001h	Select page 1
0x00h	0x8140h	Disable Auto-negotiation
0x16h	0x0000h	Select page 0

Mechanical Specifications

SNR’s Copper SFP transceivers are compliant with the dimensions defined by the SFP Multi-Sourcing Agreement (MSA).

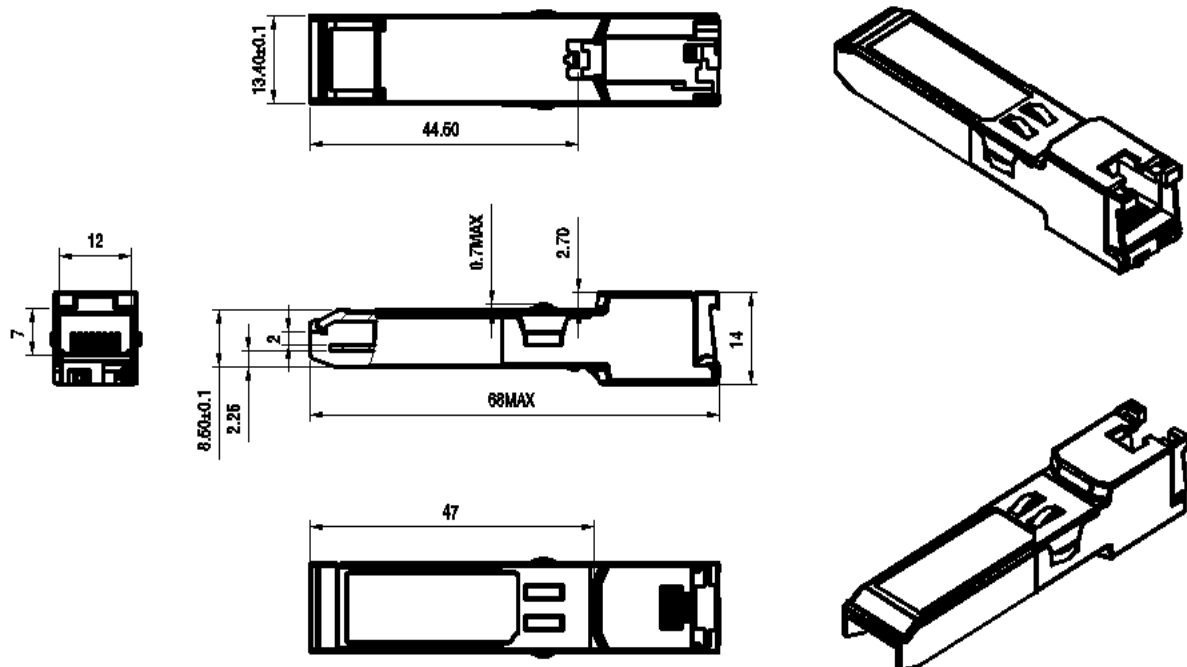

GUARANTEE:



CONTACT:

Address: Building 56/2, Predelnaya Street, Yekaterinburg, Russia

Tel: +7(343) 379-98-38

Fax: +7(343) 379-98-38

E-mail: info@nag.ru

Online shop: <http://shop.nag.ru>