

USB Installation Manual for HTX11 6-10kVA v1.0

Materials list:

1. USB board (PS1202_TF4) and signal cable

1. Remove the cover, 4 pcs screws on the back of cabinet, 2 screws on both sides of the cabinet, as is shown in figure 1.

Notes:

For standard model (Built-in batteries), there are another screws on the top of cabinet.

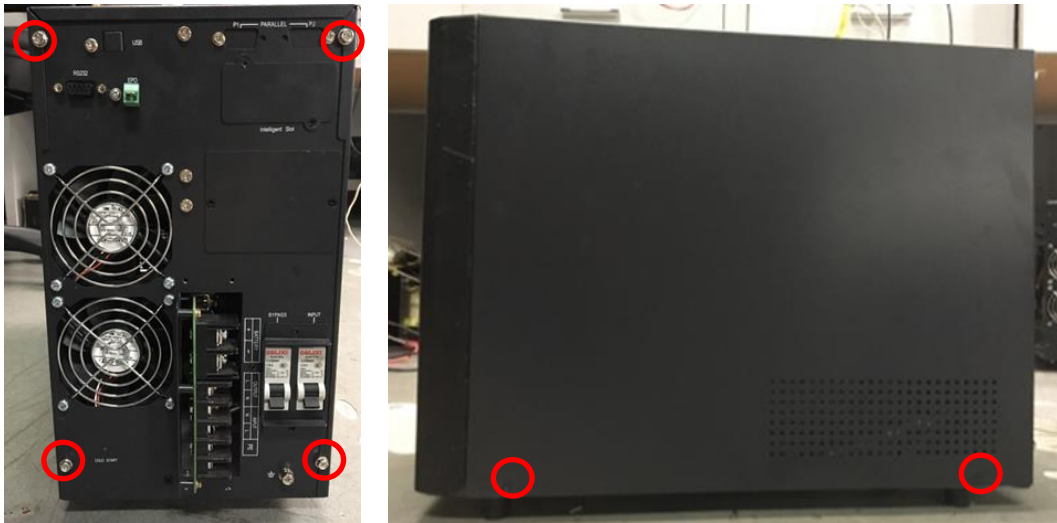


Figure 1 Remove cover

2. Remove the plate of USB, as is shown in figure 2.

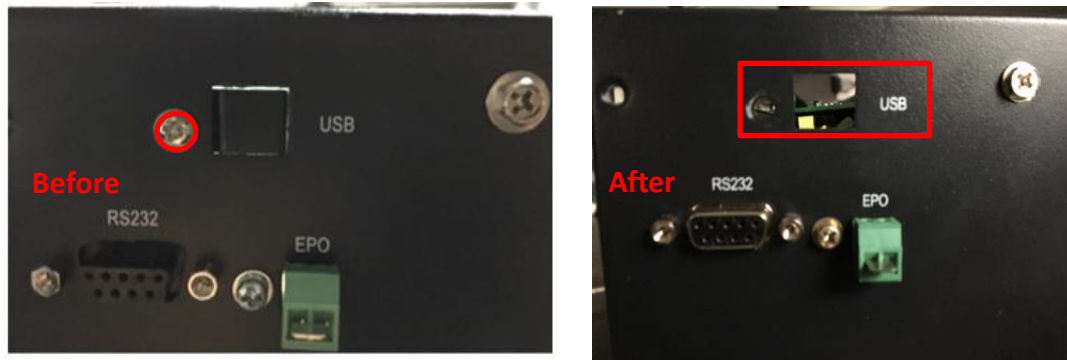


Figure 2 Remove plate of USB

3. Install the USB board, as is shown in figure 3.



Figure 3 Install USB board

4. Connect signal cable, PS1202_TF4 board J2 or J3 to PS1302_TF1 board J4 or J5, as is shown in figure 4.

Note:

J2 and J3 are same, J4 and J5 are same.

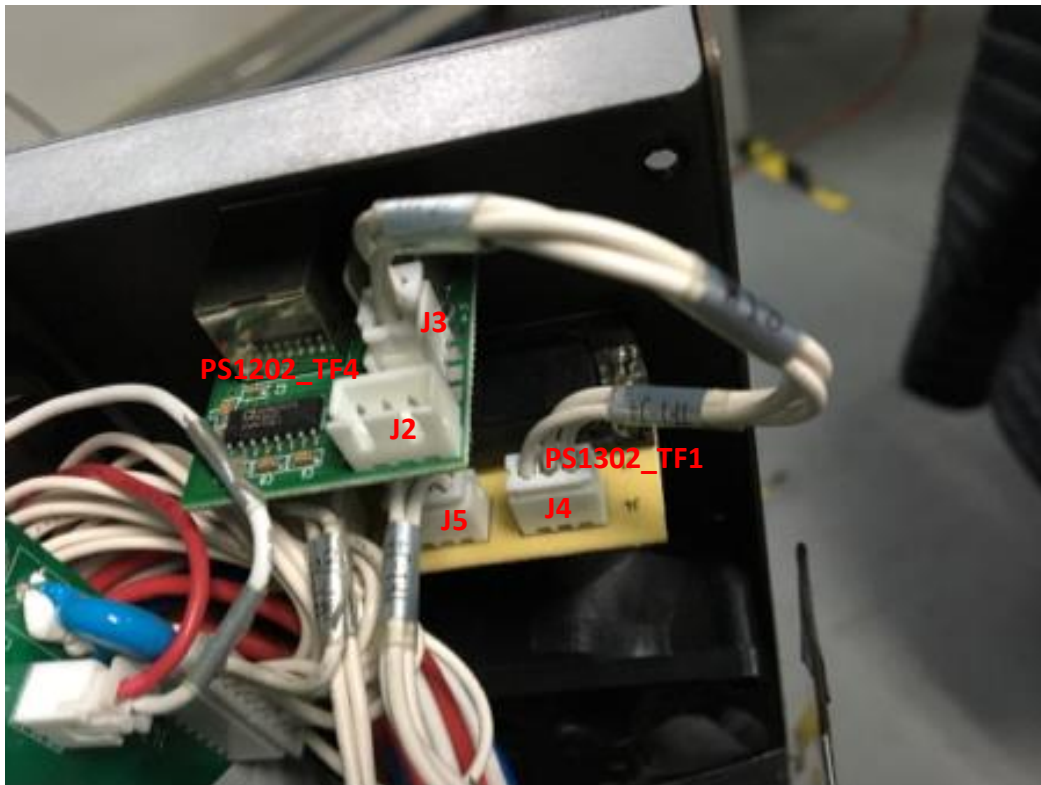


Figure 4 Insert slot

5. Install back the cover of UPS.

Note:

For standard model (Built-in batteries), please install top cover first, then others.