




**Сброс настроек
LaVoice 200/500**

Для сброса настроек по умолчанию LaVoice 200/500 необходимо подключить клавиатуру (usb порт) и монитор (hdmi порт) к оборудованию.


После загрузки оборудования необходимо зайти в режим «Reset», для этого:

- Для входа, используем **login/password: super/super**

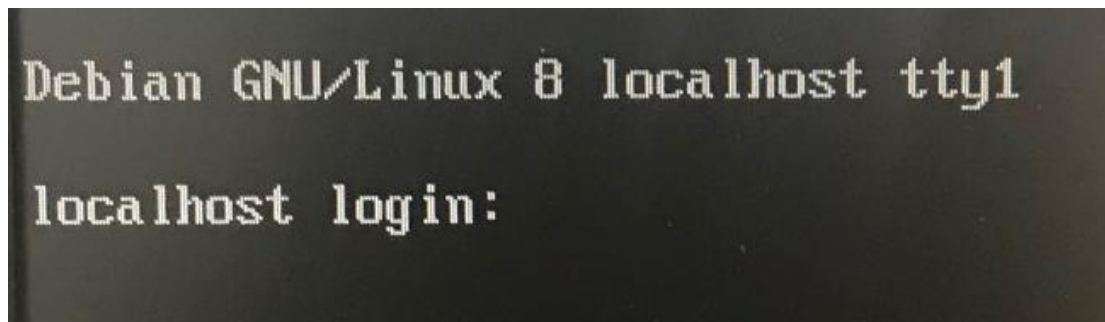

```
Debian GNU/Linux 8 localhost tty1
localhost login:
```

- Для сброса настроек выбираем п.1, для подтверждения действия вводим пароль и нажимаем «**Enter**»

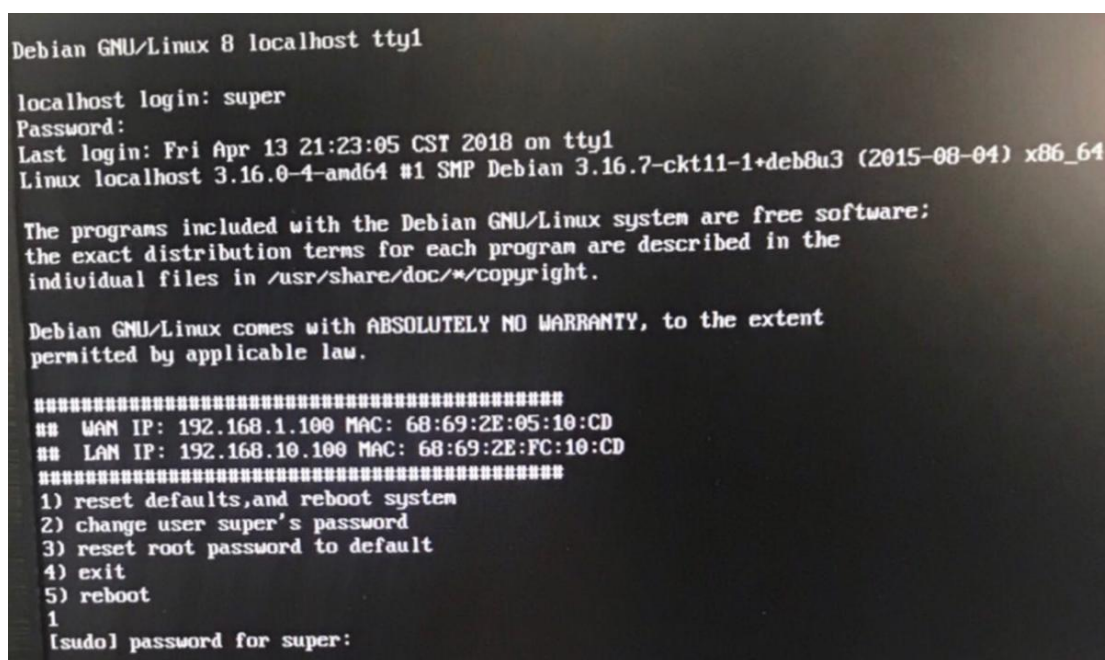

```
Debian GNU/Linux 8 localhost tty1
localhost login: super
Password:
Last login: Fri Apr 13 21:23:05 CST 2018 on tty1
Linux localhost 3.16.0-4-amd64 #1 SMP Debian 3.16.7-ckt11-1+deb8u3 (2015-08-04) x86_64

The programs included with the Debian GNU/Linux system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.

*****
## WAN IP: 192.168.1.100 MAC: 68:69:2E:05:10:CD
## LAN IP: 192.168.10.100 MAC: 68:69:2E:FC:10:CD
*****
1) reset defaults, and reboot system
2) change user super's password
3) reset root password to default
4) exit
5) reboot
1
[sudo] password for super:
```

- После перезагрузки оборудование будет доступно с настройками по умолчанию