

## BO-XFP-CXX-80 Series

10Gbps CWDM 80km XFP Transceiver



### Models:

**BO-XFP-C47-80**

**BO-XFP-C49-80**

**BO-XFP-C51-80**

**BO-XFP-C53-80**

**BO-XFP-C55-80**

**BO-XFP-C57-80**

**BO-XFP-C59-80**

**BO-XFP-C61-80**

**BO-XFP-C27-80**

**BO-XFP-C29-80**

**BO-XFP-C31-80**

**BO-XFP-C33-80**

**BO-XFP-C35-80**

**BO-XFP-C37-80**

**BO-XFP-C39-80**

**BO-XFP-C41-80**

**BO-XFP-C43-80**

**BO-XFP-C45-80**

### Features

- ◆ Supports 9.95Gbps to 11.3Gbps bit rates
- ◆ Cooled CWDM EML and APD receiver
- ◆ Supports Lineside and XFI loopback
- ◆ Full Duplex LC connector
- ◆ Metal enclosure, for lower EMI
- ◆ Single +3.3V power supply
- ◆ Hot-pluggable
- ◆ Power dissipation < 3W
- ◆ Operating temperature range:
  - ◆ Commercial: 0°C~+70°C
  - ◆ RoHS Compliant
  - ◆ No Reference Clock required
  - ◆ Industrial: -20 to +70°C
- ◆ Built-in digital diagnostic functions
- ◆ Standard bail release mechanism
- ◆ Maximum link length of 80km

### Applications

- ◆ 10GBASE-ZR/ZW
- ◆ 10G Ethernet
- ◆ SONET OC-192 & SDH STM 64

### Ordering information

Part No.	Data Rate	Connector	Temp.	Distance	CDR	DDMI
BO-XFP-CXX-80*	Up to 11.3Gbps	EML	Standard	80km	Yes	YES

\*Standard version

## Standards

- Compliant with MSA SFP+ specification (SFF-8431)
- Compliant with SFF-8472
- Compliant with SFP+ MSA
- Compliant to IEEE 802.3ae

## Product selection

Wavelength	xx	Clasp Color Code	Wavelength	xx	Clasp Color Code
1470 nm	47	Gray	1550 nm	55	Yellow
1490 nm	49	Purple	1570 nm	57	Orange
1510 nm	51	Blue	1590 nm	59	Red
1530 nm	53	Green	1610 nm	61	Brown

## Specifications

Absolute Maximum Ratings				
Parameter	Symbol	Min	Max	Unit
Storage temperature	TS	-40	85	°C
Power Supply Voltage	Vcc3	-0.3	+3.6	V
Power Supply Voltage	Vcc2	-0.3	+2.0	V
Relative Humidity	RH	5	95	%
Signal Input Voltage		Vcc-0.3	Vcc+0.3	V

Recommended Operating Conditions					
Parameter	Symbol	Min	Typical	Max	Unit
Operating Case Temperature (Commercial)	Tc	-5		70	°C
Power Supply Voltage	Vcc3	3.13	3.3	3.47	V
Supply Current	Icc3			640	mA
Data Rate		9.95	10.3125	11.3	Gbps
Fiber Length 9/125µm core SMF		-	80	-	km

Electrical Characteristics						
Parameter	Symbol	Min	Typical	Max	Unit	Notes
Supply Voltage – 1.8V supply	Vcc2	1.71		1.89	V	
Supply Voltage – 3.3V supply	Vcc3	3.13		3.47	V	
Supply Current – 1.8V supply	Icc2			250	mA	
Supply Current – 3.3V supply	Icc3			760	mA	
Module total power	P			3	W	
Transmitter differential input voltage	Vin,pp	120		820	m V	
Receiver differential output Voltage	Vout,pp	340	650	850	m V	

Electrical Characteristics						
Input differential impedance	Rin	80	100	120	Ω	1
LOS Fault	VLOS fault	Vcc-0.5		VccHost	V	2
LOS Normal	VLOS norm	GND		GND+0.5	V	2
XFP Interrupt, Mod_NR	Vol	0		0.4	V	
	Voh	VccHost-0.5		VccHost+0.3	V	
P_Down/RST	Vil	-0.3		0.8	2.0	
	Vih	2.0		Vcc+0.3	2.0	
Transmit disable voltage	VIH	2.0		Vcc	V	
Transmit enable voltage	VIL	GND		GND+0.8	V	
Data output rise time	Tr	38			ps	
Data output fall time	Tf	38			ps	
Transmit Disable Assert Time				10	us	
Power Supply Rejection	PSR			100	mVpp	3

**Notes:**

- 1) Connected directly to TX data input pins. AC coupled thereafter.
- 2) Loss Of Signal is LVTTTL. Logic 0 indicates normal operation; logic 1 indicates no signal detected.
- 3) Receiver sensitivity is compliant with power supply sinusoidal modulation of 20 Hz to 1.5 MHz up to specified value applied through the recommended power supply filtering network.

Optical transmitter Characteristics						
Parameter	Symbol	Min	Typical	Max	Unit	Notes
Launched Power (avg.)	Pout	0		5	dBm	1
Operating Wavelength Range	λc	λ-6.5		λ+6.5	nm	2
Spectral Width(-20dB)	Δλ			0.3	nm	
Side Mode Suppression Ratio	SMSR	30			dB	
Extinction Ratio	ER	8.2			dB	
Average Launch power of OFF transmitter	POFF			-30	dB	
Output Eye Diagram	Compliant with ITU-T G.691 eye mask and IEEE802.3ae eye mask					
Optical receiver Characteristics						
Parameter	Symbol	Min	Typical	Max	Unit	Notes
Receiver Sensitivity	S			-24	dBm	3
Wavelength Range	λc	1270		1610	nm	
Optical Power Input Overload	Pin-max	-8			dBm	
LOS	Optical De-assert	Pd		-27	dBm	
	Optical Assert	Pa	-37			
LOS hysteresis		0.5			dB	

**Notes:**

- 4) Class 1 Laser Safety per FDA/CDRH and IEC-825-1 regulations.
- 5) "λ" is:1470,1490,1510,1530,1550,1570,1610, please the "product selection".
- 6) Receiver Reflectance Measured with a PRBS 231-1 test pattern, @10.3125Gbps, ER=8.2dB, BER<10-12.

## Digital Diagnostic Monitoring Information

As defined by the XFP MSA, XFP transceivers provide digital diagnostic functions via a 2-wire serial interface, which allows real-time access to the following operating parameters:

- Transceiver temperature
- Laser bias current
- Transmitted optical power
- Received optical power
- Transceiver supply voltage

It also provides a sophisticated system of alarm and warning flags, which may be used to alert end-users when particular operating parameters are outside of a factory-set normal range.

The operating and diagnostics information is monitored and reported by a Digital Diagnostics Transceiver Controller (DDTC) inside the transceiver, which is accessed through the 2-wire serial interface. When the serial protocol is activated, the serial clock signal (SCL pin) is generated by the host. The positive edge clocks data into the XFP transceiver into those segments of its memorymap that are not write-protected. The negative edge clocks data from the XFP transceiver. The serial data signal (SDA pin) is bi-directional for serial data transfer. The host uses SDA in conjunction with SCL to mark the start and end of serial protocol activation. The memories are organized as a series of 8-bit data words that can be addressed individually or sequentially. The 2-wire serial interface provides sequential or random access to the 8 bit parameters, addressed from 000h to the maximum address of the memory.

For more detailed information including memory map definitions, please see the XFPMSA Specification.

## Pin Descriptions

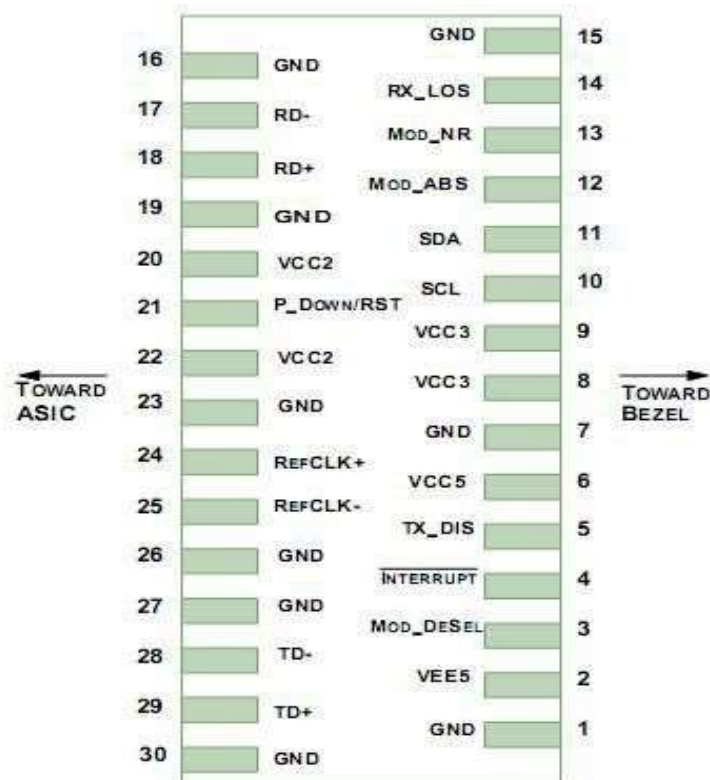


Diagram of Host Board Connector Block Pin Numbers and Name


## Pin Assignment

Pin	Symbol	Description	Notes
1	GND	Module Ground(Common with Receiver Ground)	1
2	VEE5	Optional –5.2 Power Supply – Not required	
3	Mod-Desel	Module De-select; When held low allows the module to respond to 2-wire serial interface commands	
4	Interrupt	Interrupt (bar); Indicates presence of an important condition which can be read over the serial 2-wire interface	2
5	TX_DIS	Transmitter Disable; Transmitter laser source turned off	
6	VCC5	+5 Power Supply	
7	GND	Module Ground	1
8	VCC3	+3.3V Power Supply	
9	VCC3	+3.3V Power Supply	
10	SCL	Serial 2-wire interface clock	2
11	SDA	Serial 2-wire interface data line	2
12	Mod_Abs	Module Absent; Indicates module is not present. Grounded in the module.	2
13	Mod_NR	Module Not Ready; MODULETEK defines it as a logical OR between RX_LOS and Loss of Lock in TX/RX.	2
14	RX_LOS	Receiver Loss of Signal indicator	2
15	GND	Module Ground	1
16	GND	Module Ground	1
17	RD-	Receiver inverted data output	
18	RD+	Receiver non-inverted data output	
19	GND	Module Ground	1
20	VCC2	+1.8V Power Supply – Not required	
21	P_Down/RST	Power Down; When high, places the module in the low power stand-by mode and on the falling edge of P_Down initiates a module reset Reset; The falling edge initiates a complete reset of the module including the 2-wire serial interface, equivalent to a power cycle.	
22	VCC2	+1.8V Power Supply – Not required	
23	GND	Module Ground	1
24	RefCLK+	Reference Clock non-inverted input, AC coupled on the host board – Not required	3
25	RefCLK-	Reference Clock inverted input, AC coupled on the host board – Not required	3
26	GND	Module Ground	1
27	GND	Module Ground	1
28	TD+	Transmitter inverted data input	
29	TD-	Transmitter non-inverted data input	
30	GND	Transmitter Ground	1

### Notes:

- 1) Module circuit ground is isolated from module chassis ground within the module.
- 2) Open collector; should be pulled up with 4.7k – 10kohms on host board to a voltage between 3.15V and 3.6V.
- 3) A Reference Clock input is not required by the XFP-10GER. If present, it will be ignored.

## Mechanical Specifications

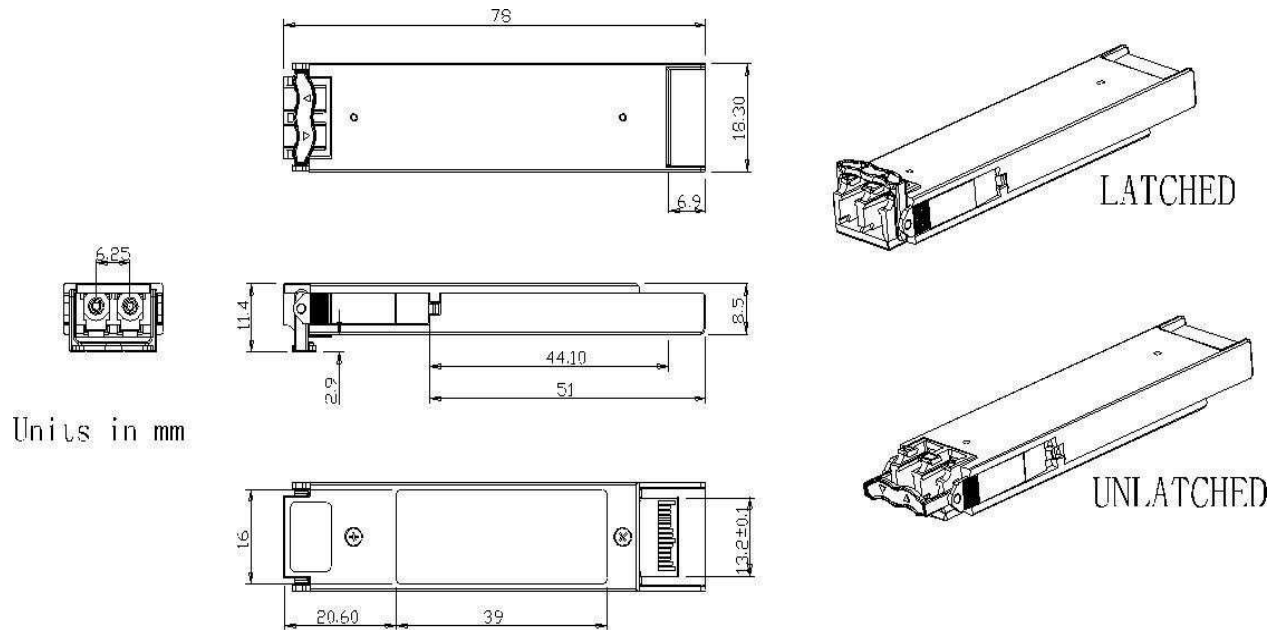

ALL DIMENSIONS ARE  $\pm 0.2$ mm UNLESS OTHERWISE SPECIFIED  
UNIT: mm

## CONTACT:

**Address:** 12A, Krasnolesya Street, Yekaterinburg, Russia

**Tel:** +7(343) 379-98-38

**Fax:** +7(343) 379-98-38

**E-mail:** [info@nag.ru](mailto:info@nag.ru)

**Online shop:** <http://shop.nag.ru>