



H3C IE4320-EI Rackmount Series Industrial Switches

Product overview


H3C IE4320-EI series switches are H3C's latest industrial Ethernet switches designed for rugged environment and wide operating temperature. H3C IE4320-EI series industrial switches adhere to industrial grade hardware design and adopts highly reliable industrial grade components, while using the highly developed and tested Comware platform to provide a trustworthy Ethernet solution in wide operating temperature scenarios. IE4320-EI industrial switch series offer extensive industrial environmental compliance and certifications, and can be widely used in public transport, traffic management, smart building, and other extreme temperature scenario.

Views

H3C IE4320-EI series industrial switches include the following models:

IE4320-16T8TP4P-EI

The switch provides 16*10/100/1000BASE-T Ports, 8*Combo Ports(10/100/1000BASE-T or 100/1000BASE-X SFP), and 4*1000BASE-X SFP Ports, 100-240VAC, Redundant Inputs.

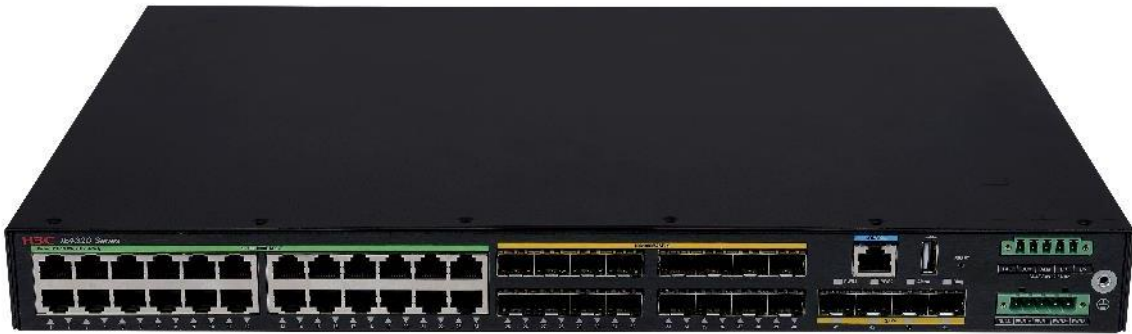

IE4320-16T8TP4P-EI

IE4320-24T4X-EI

The switch provides 24*10/100/1000BASE-T Ports and 4*1G/10G BASE-X SFP Plus Ports, 100-240VAC, Redundant Inputs.



IE4320-24T4X-EI

IE4320-16T8TP4X-EI (AC)

The switch provides 16*10/100/1000BASE-T Ports, 8*Combo Ports(10/100/1000BASE-T or 100/1000BASE-X SFP), and 4*1G/10G BASE-X SFP Plus Ports, 100-240VAC, Redundant Inputs.



IE4320-16T8TP4X-EI (AC)

IE4320-16T8TP4X-EI (DC)

The switch provides 16*10/100/1000BASE-T Ports, 8*Combo Ports(10/100/1000BASE-T or 100/1000BASE-X SFP), and 4*1G/10G BASE-X SFP Plus Ports, 24-48VDC, Redundant Inputs.



IE4320-16T8TP4X-EI (DC)

IE4320-16T8TP4X-HPWR-EI (AC)

The switch provides 8*10/100/1000BASE-T PoE++ Ports, 8*10/100/1000BASE-T PoE+ Ports, 8*Combo Ports(PoE+ or 100/1000BASE-X SFP), and 4*1G/10G BASE-X SFP Plus Ports, 100-240VAC, Redundant Inputs.



IE4320-16T8TP4X-HPWR-EI (AC)

IE4320-16T8TP4X-HPWR-EI (DC)

The switch provides 8*10/100/1000BASE-T PoE++ Ports, 8*10/100/1000BASE-T PoE+ Ports, 8*Combo Ports (PoE+ or 100/1000BASE-X SFP), and 4*1G/10G BASE-X SFP Plus Ports, 54-57VDC, Redundant Inputs.



IE4320-16T8TP4X-HPWR-EI (DC)

Features and highlights

Exceptional quality, solid as a rock

H3C IE4320-EI series industrial switches are the latest Ethernet switches developed with industrial compliance and wide operating temperature in mind. All models are built with industrial grade components, with reliability significantly higher than commercial counterparts running under the same conditions.

- Fanless natural cooling design. Multiple heat dissipation components such as embedded heatsink and thermal adhesive make it perform consistently under harsh environment. Operating temperature ranges from -40°C to 75°C.
- Shock and vibration resistant, dust proof, IP40 compliant.
- Support high level electromagnetic shielding, capable of withstanding electrostatic discharge, surge/burst/electrical fast transients, pulse magnetic field, radiated electrical field.

Rich software features

H3C IE4320-EI series industrial switches integrated the switching, routing, ring network protection and security.

Support full layer-2 Ethernet feature sets, with 802.1Q VLAN, protocol based VLAN, Voice VLAN, Guest VLAN, Q-in-Q, flexible Q-in-Q encapsulation, and multicast VLAN. STP/RSTP/MSTP, 802.3x Ethernet flow control protocol; support QoS congestion management through data classification and prioritization to ensure transmission of mission critical data; support Link Layer Discovery Protocol (LLDP), Link Aggregation Control Protocol (LACP), Device Link Detection Protocol (DLDP), Generic Attribute Registration Protocol (GARP), multicasting at layer 2 and layer 2 features such as VLAN registration protocol and broadcast storm suppression.

H3C IE4320-EI series industrial switches support IPv4 and IPv6 dual stack protocols as well as IPv4 and IPv6 forwarding at full line speed on hardware. It supports IPv4/v6 static routing, routed port, RIP and OSPF (in small scale). In addition, it supports IGMP Snooping, DHCP Server, DHCP Client, DHCP Snooping, DHCP Relay (option 82) and Domain Name System (DNS).

H3C IE4320-EI series industrial switches support Rapid Ring Protection Protocol (RRPP). The Rapid Ring Protection Protocol (RRPP) is a link layer protocol dedicated to Ethernet rings. It prevents broadcast storms caused by data loops when an Ethernet ring is healthy, and rapidly restores the communication paths between the nodes after a link is disconnected on the ring by bringing up the backup link. Compared with STP, RRPP has the following advantages: fast topology convergence (within 20 milliseconds); convergence time independent of Ethernet ring size. On intersecting rings, topology update of an RRPP ring does not ripple to other rings, data transmission thus becomes more stable. RRPP also supports load balancing in Ethernet rings, which improves physical link bandwidth utilization.

H3C IE4320-EI series industrial switches implement full Ethernet security features. By enforcing multiple sets of security mechanisms, they effectively limit malware spread and traffic flow attack. The switches support layer 2 to 4 ACL control, block CPU, ARP, and DoS attacks. IEEE 802.1x port-based authentication is a client-server-based access control and authentication protocol that restricts unauthorized clients from connecting to a LAN through publicly accessible ports.

TACACS+ and RADIUS authentication can implement centralized management for switches, and prevent unauthorized change in user allocation. They also support rapid deployment of End-point Admission Domination (EAD), as well as SAVI-based IPv6 source address validation.

Ethernet Ring Protection Switching(ERPS) is a ring network protection protocol defined by ITU, G.8032. It is a link layer protocol specially applied to the Ethernet ring network. When the Ethernet ring network is complete, it can prevent broadcast storms caused by the data loop, and when a link on the Ethernet ring network is disconnected, it can quickly restore the communication between various nodes on the ring network (within 20 milliseconds).

Intelligent resilient framework 2 (IRF2)

H3C IE4320-EI series industrial switches support IRF2 (Second Generation Intelligent Resilient Architecture) technology, which connects multiple physical devices to each other, making it virtual as a logical device, that is, users can regard these multiple devices as a single device manage and use. H3C IE4320-EI series industrial switches can not only perform virtualization through 10G optical interfaces, but also it can be virtualized through the gigabit optical port and the gigabit electrical port, and the IRF2 function can be realized through the network cable. IRF2 provides the following benefit:

Simplified management

After the IRF architecture is formed, it can be connected to any port of any device to log in to a unified logical device. By configuring a single device, the entire intelligent elastic system and all member devices in the system can be managed without physical connection. Configure and manage them separately on each member device.

Simplified business

The various control protocols running in the logical device formed by IRF are also run as a single device. For example, the routing protocol will be calculated as a single device. With the application of the cross-device link aggregation technology, it can replace the original spanning tree protocol, which saves the interaction of significant protocol packets between devices, simplifies network operation, and shortens the convergence time when the network is turbulent.

High performance

For Ethernet switches, the improvement in performance and port density is limited by the hardware structure. The performance and port density of an IRF system is the sum of the performance and port numbers of all devices inside the IRF. Therefore, IRF technology can easily expand the switching capability of the device and the density of user ports several times, thereby greatly improving the performance of the device.

High reliability

The high reliability of IRF is reflected in three aspects: link, equipment, and protocol. The physical ports between the member devices support the aggregation function, and the physical connections between the IRF system and the upper- and lower-layer devices also support the aggregation function, which improves the reliability of the link through multi-link backup; the IRF system consists of multiple member devices. Once the master device fails, the system will quickly and automatically elect a new master to ensure uninterrupted services through the system, thus achieving device-level 1: N

backup; the IRF system will have a real-time protocol hot backup function responsible for the configuration information of the protocol. Backup to all other member devices to achieve 1: N protocol reliability.

Visualization

H3C IE4320-EI series industrial switches support Telemetry technology. The real-time resource information and alarm information of the switch can be sent to the operation and maintenance platform through the GRPC protocol. The operation and maintenance platform analyzes real-time data, which can realize network quality backtracking, troubleshooting, risk warning, structure optimization and other functions to accurately guarantee user experience.

Green features

H3C IE4320-EI series industrial switches implement a variety of green energy saving features, including auto-power-down (port automatic energy saving). If the interface status is always down for a period, the system automatically stops the interface power and the system enters power-saving mode. They also support EEE energy feature, by which if a port stays idle for a period, the system will set the port to energy-saving mode. The switches are also compliant with material environmental protection and the EU RoHS safety standard.

Comprehensive authentication strategies

H3C IE4320-EI series industrial switches support AAA, RADIUS authentication, user-based account, IP, MAC, VLAN and port based dynamic or static user identification and binding. The switches also support H3C iMC to implement real-time user management, diagnose and remove illicit network attack.

Outstanding management

H3C IE4320-EI series industrial switches management interface supports SNMPv1/V2/v3, Intelligent Management Center (iMC), Command Line Interface (CLI), Web based management, TELNET and FTP configuration. They also support SSH2.0 and SSL encryption to make management safer.

Power failure alarms

H3C IE4320-EI series industrial switches provide redundant power supply and support alarms based on power failure.

H3C IE4320-EI series industrial switches support IEEE Dying Gasp for alarms when a power outage occurs.

Technical specifications

Hardware specifications

Item	IE4320-16T8TP4P-EI	IE4320-24T4X-EI	IE4320-16T8TP4X-EI (AC)	IE4320-16T8TP4X-EI (DC)
Switching capacity	56Gbps	128Gbps	128Gbps	128Gbps
Forwarding capacity	42Mpps	96Mpps	96Mpps	96Mpps
Dimensions (W × D × H)	440×260×44mm	440×260×44mm	440×260×44mm	440×260×44mm
Weight	≤ 3.8kg	≤ 3.8kg	≤ 3.9kg	≤ 3.8kg
10/100/1000M Base-T port	24 (8*combo)	24	24 (8*combo)	24 (8*combo)
1G SFP port	4	-	8*combo	8*combo
10G SFP port	-	4	4	4
Input voltage	Rated AC voltage: 100-240V	Rated AC voltage: 100-240V	Rated AC voltage: 100-240V	Rated DC voltage: 24-48V
Power Supply	1 + 1 AC Power Redundancy	1 + 1 AC Power Redundancy	1 + 1 AC Power Redundancy	1 + 1 DC Power Redundancy
Power consumption	MIN: 8.6W MAX: 30.9W	MIN: 7.4W MAX: 21.1W	MIN: 8.6W MAX: 30.9W	MIN: 8.6W MAX: 23.5W
Installation Method	Rackmount	Rackmount	Rackmount	Rackmount
Operating temperature	-40°C ~ 75°C			
Storage temperature	-40°C ~ 85°C			
Operating & storage humidity	5% RH to 95% RH, non-condensing			
Operating environment	International Protection Marking IP40 Lightning-proof Ethernet Port Electro Static Discharge Air Discharge: ≥±8.0kV Contact Discharge: ≥±6.0kV			

Item	IE4320-16T8TP4X-HPWR-EI (AC)	IE4320-16T8TP4X-HPWR-EI (DC)
Switching capacity	128Gbps	128Gbps
Forwarding capacity	96Mpps	96Mpps
Dimensions (W × D × H)	440×320×44 mm	440×320×44mm
Weight	≤ 4.5kg	≤ 4.5kg

Item	IE4320-16T8TP4X-HPWR-EI (AC)	IE4320-16T8TP4X-HPWR-EI (DC)
10/100/1000M Base-T port	24 (8*combo)	24 (8*combo)
1G SFP port	8*combo	8*combo
10G SFP port	4	4
Input voltage	Rated AC voltage: 100-240V	Rated DC voltage: 18-60V
Power Supply	1 + 1 AC Power Redundancy	1 + 1 DC Power Redundancy
Power consumption	MIN: 13.4W MAX: 392.8W	MIN: 13.4W MAX: 392.8W
POE	360W	360W
Installation Method	Rackmount	Rackmount
Operating temperature	-40°C ~ 75°C	
Storage temperature	-40°C ~ 85°C	
Operating & storage humidity	5% RH to 95% RH, non-condensing	
Operating environment	International Protection Marking IP40 Lightning-proof Ethernet Port Electro Static Discharge Air Discharge: $\geq \pm 8.0\text{kV}$ Contact Discharge: $\geq \pm 6.0\text{kV}$	

- This content is applicable only to regions outside mainland China. H3C reserves the right to interpret the content.
- The options may be different depending on the specific requirement. Restrictions and limitations may apply. To confirm availability, refer to related user guide or visit H3C website <https://www.h3c.com/en/home/htb/>.

Software specifications

Feature	IE4320-EI Series Industrial Switches
Cluster management	Support
Port aggregation	Support
Ethernet switching	Store-and-Forward
MAC address table	Static MAC Address Black hole MAC Address MAC Address Learning Limit
VLAN	Port-based VLAN MAC-based VLAN Protocol-based VLAN

Feature	IE4320-EI Series Industrial Switches
	Voice VLAN Guest VLAN QinQ and Selective QinQ VLAN Mapping
ACL	Time Range-based ACL Layers 2-4 ACL IPv4/IPv6 ACL Ingress ACL Rate-limited ACL
QoS	Diff-Serv QoS Flexible queue scheduling algorithms based on ports and queues, including SP, WRR and SP+WRR 802.1p DSCP remarking
DHCP	DHCP Client DHCP Snooping DHCP Snooping Trust DHCP Snooping option 82 / DHCP Relay option 82
ARP	Static ARP Gratuitous ARP ARP anti-attack ARP Rate Limiting
IP routing	Routed Port IPv4 Routing: Static Route, RIP IPv6 Routing: Static Route, Unicast Route
Multicast	IGMP v1/v2/v3 Snooping IGMP Snooping Fast-leave IGMP Snooping Group-policy IGMP Snooping Proxy IPv4/IPv6 Multicast VLAN MLD v1/v2 Snooping MVR
Spanning tree	STP / RSTP / MSTP STP Root Guard BPDU Guard Loop Guard
Mirroring	Port Mirroring Remote SPAN (RSPAN)

Feature	IE4320-EI Series Industrial Switches
Security	Hierarchical User Management and Password Protection 802.1X Authentication AAA Authentication Public Key Infrastructure (PKI) HWTACACS SSH 2.0 IP/MAC/Port/VLAN Binding IP Source Guard HTTPs SSL Dynamic ARP Inspection, Preventing Man-in-the-Middle Attacks and ARP DoS Attacks SAVI
IEEE	IEEE 802.3x IEEE 802.3ad IEEE 802.3af IEEE 802.3at IEEE 802.1p IEEE 802.1x IEEE 802.1q IEEE 802.1d IEEE 802.1w IEEE 802.1s
Management and maintenance	Loading and Upgrading through Xmodem / FTP / TFTP Configuration through CLI, Telnet and Console Port TR069 802.1ag and 802.3ah SNMPv1/v2c/v3 iMC NMS Web-based NMS System Log, Alarms based on Severities, and Output of Debugging Information Alarms based on Power Failure NTP SNTP Temperature Alarm Ping, Tracert, Telnet
Alarm contact channels	Uses a relay for output, with a current carrying capacity of 1A @ 24 VDC

Feature	IE4320-EI Series Industrial Switches
	The relay outputs alarms by opening or closing the contact.
Reliability	Dying Gasp RRPP ERPS(G.8032) MRP
Standards and certifications	Safety: EN 62368-1, UL61010 EMC: CE/FCC/VCCI EMI: EN55035/EN55032/EN55024,CISPR 32, FCC Part 15B ,VCCI-CIPER32,Class A EMS: IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 6 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 4kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 4 Kv/2kv; Signal: 6 kV IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF 30A IEC 60068-2-1 IEC 60068-2-2 Railway: EN 50121-4 Freefall: IEC 60068-2-31 Shock: IEC 60068-2-27 Vibration: IEC 60068-2-6

Performance specification

Item	IE4320-EI series industrial switches
MAC address entries	16,384
VLAN	4094
VLAN interface	32
IPv4 routing entries	3,000
IPv4 ARP entries	2,048
IPv4 ACL entries	1,024
IPv6 unicast routing entries	750
IPv6 ACL entries	1,024
IPv6 ND entries	750
Multicast L2 entries	999
Jumbo frame length	10,000

Item	IE4320-EI series industrial switches
QOS forward queues	8
Link group num	124
Max num in one link group	8

Ordering information

Item		Description
Product code	LS-IE4320-16T8TP4P-EI-AC	H3C IE4320-16T8TP4P-EI Industrial Ethernet Switch with 16*10/100/1000BASE-T Ports, 8*Combo Ports(10/100/1000BASE-T or 100/1000BASE-X SFP), and 4*1000BASE-X SFP Ports, 100-240VAC, Redundant Inputs
	LS-IE4320-24T4X-EI-AC	H3C IE4320-24T4X-EI Industrial Ethernet Switch with 24*10/100/1000BASE-T Ports and 4*1G/10G BASE-X SFP Plus Ports, 100-240VAC, Redundant Inputs
	LS-IE4320-16T8TP4X-EI-AC	H3C IE4320-16T8TP4X-EI Industrial Ethernet Switch with 16*10/100/1000BASE-T Ports, 8*Combo Ports(10/100/1000BASE-T or 100/1000BASE-X SFP), and 4*1G/10G BASE-X SFP Plus Ports, 100-240VAC, Redundant Inputs
	LS-IE4320-16T8TP4X-EI-DC	H3C IE4320-16T8TP4X-EI Industrial Ethernet Switch with 16*10/100/1000BASE-T Ports, 8*Combo Ports(10/100/1000BASE-T or 100/1000BASE-X SFP), and 4*1G/10G BASE-X SFP Plus Ports, 24-48VDC, Redundant Inputs
	LS-IE4320-16T8TP4X-HPWR-EI-AC	H3C IE4320-16T8TP4X-HPWR-EI Industrial Ethernet Switch with 8*10/100/1000BASE-T PoE++ Ports, 8*10/100/1000BASE-T PoE+ Ports, 8*Combo Ports(PoE+ or 100/1000BASE-X SFP), and 4*1G/10G BASE-X SFP Plus Ports, 100-240VAC, Redundant Inputs

Datasheet history

Description	Location	Date
Official released.	-	March, 2026



New H3C Technologies Co., Limited
Beijing Headquarters
Tower 1, LSH Center, 8 Guangshun South Street,
Chaoyang
District, Beijing, China
Zip: 100102
Hangzhou Headquarters
No.466 Changhe Road, Binjiang District, Hangzhou,
Zhejiang,
China Zip: 310052
Tel: +86-571-86760000
Fax: +86-571-86760001

Copyright ©2025 New H3C Technologies Co., Limited
Reserves all rights Disclaimer: Though H3C strives to
provide accurate information in this document, we
cannot guarantee that details do not contain any
technical error or printing error. Therefore, H3C cannot
accept responsibility for any inaccuracy in this
document. H3C reserves the right for the modification
of the contents herein without prior notification.

<https://www.h3c.com>