



Huawei AirEngine 6776-58TI Access Point Datasheet

Product Overview

Huawei AirEngine 6776-58TI is an indoor IoT access point (AP) in compliance with Wi-Fi 7 (802.11be). It can flexibly switch between 2.4 GHz (2x2 MIMO) + 5 GHz (4x4 MIMO) + 6 GHz (2x2 MIMO) mode and 2.4 GHz (4x4 MIMO) + 5 GHz (4x4 MIMO) mode. Designed with a total of 8 spatial streams, the AP delivers a data rate of up to 7.89 Gbps. AirEngine 6776-58TI has built-in smart antennas to enable always-on signals for users, and draws on Wi-Fi 7 innovations to redefine wireless user experience. These strengths make AirEngine 6776-58TI ideal for indoor coverage scenarios such as mobile office, education, healthcare, shopping malls/supermarkets and so on.



AirEngine 6776-58TI

- Provides services simultaneously on the 2.4 GHz (2x2 MIMO), 5 GHz (4x4 MIMO), and 6 GHz (2x2 MIMO) frequency bands, at a data rate of up to 689 Mbps at 2.4 GHz, 5.76 Gbps at 5 GHz, and 1.44 Gbps at 6 GHz, meaning 7.89 Gbps for the entire AP.
- Has built-in smart antennas that automatically adjust the coverage direction and signal strength based on the intelligent switchover algorithm. Such capability enables the AP to flexibly adapt to the application environment changes, providing accurate and stable coverage as STAs move.
- Built-in IoT slots (PCIe) and USB port for IoT expansion such as ZigBee and RFID
- Supports the Wi-Fi Shield function, eavesdropping terminals cannot capture packets over the air interface.
- Supports Bluetooth serial port-based O&M through built-in Bluetooth and CloudCampus APP.
- Supports Fit AP and cloud-managed AP modes, easily managing the AP and its services on Huawei cloud management platform and reducing network O&M costs.

NOTE

The third radio (6 GHz) can be switched to the 2.4 GHz radio. In this case, the three radios become two radios: 2.4 GHz (4x4) +5 GHz (4x4). The data rate of the AP is up to 7.14 Gbps.

Feature Descriptions

Wi-Fi 7 (802.11be) standard

Wi-Fi 7 (Wi-Fi 7) is the next-generation Wi-Fi standard to be launched, also known as IEEE 802.11be or extremely high throughput (EHT). Based on Wi-Fi 6, Wi-Fi 7 introduces technologies such as 320 MHz bandwidth, 4096-quadrature amplitude modulation (QAM), multi-resource unit (RU), multi-link operation (MLO), enhanced multi-user multiple-input multiple-output (MU-MIMO), and multi-AP coordination. Drawing on these cutting-edge technologies, Wi-Fi 7 delivers a higher data transmission rate and lower latency than Wi-Fi 6. Wi-Fi 7 is expected to support a throughput of over 30 Gbps, about three times that of Wi-Fi 6.

Wi-Fi 7 vs. Wi-Fi 6

Based on the Wi-Fi 6 standard, Wi-Fi 7 introduces a plurality of new technologies. The following compares Wi-Fi 6 and Wi-Fi 7.

	Wi-Fi 6	Wi-Fi 7
IEEE standard	802.11ax	802.11be
Maximum transmission rate	9.6 Gbps	23 Gbps
Frequency band	2.4 GHz, 5 GHz, 6 GHz (Wi-Fi 6E)	2.4 GHz, 5 GHz, and 6 GHz
Security protocol	WPA3	WPA3
Channel bandwidth	20 MHz, 40 MHz, 80 MHz, 160 MHz, 80+80 MHz	Up to 320 MHz
Modulation mode	1024-QAM OFDMA	4096-QAM OFDMA

NOTE

- The maximum transmission rate shown in the figure above is the maximum rate of a single radio, that is, 5 GHz radio for Wi-Fi 6 and 6 GHz radio for Wi-Fi 7.
- The function and features marked with * can be implemented through software upgrade. The following describes are the same.

New Features in Wi-Fi 7

Wi-Fi 7 aims to increase the WLAN throughput to over 30 Gbps and provide low-latency access assurance. To achieve this goal, the Wi-Fi 7 standard defines modifications to both the physical layer (PHY) and MAC layer. Compared with Wi-Fi 6, Wi-Fi 7 brings the following technical innovations:

Multi-RU*

In Wi-Fi 6, each user can send or receive frames only on the RUs allocated to them, which greatly limits the flexibility of spectrum resource scheduling. To resolve this problem and further improve spectrum efficiency, Wi-Fi 7 defines a mechanism for allocating multiple RUs to a single user. To balance the implementation complexity and spectrum utilization, the Wi-Fi 7 standard specifications impose certain restrictions on RU combinations. That is, small RUs (containing fewer than 242 tones) can be combined only with small RUs, and large RUs (containing greater than or equal to 242 tones) can be combined only with large RUs. Small RUs and large RUs can be combined together.

Higher-Order 4096-QAM

The highest order modulation supported by Wi-Fi 6 is 1024-QAM, which allows each modulation symbol to carry up to 10 bits. To further improve the rate, Wi-Fi 7 introduces 4096-QAM so that each modulation symbol can carry 12 bits. With the same coding, 4096-QAM in Wi-Fi 7 can achieve a 20% rate increase compared with 1024-QAM in Wi-Fi 6.

Multi-Link Mechanism

To efficiently utilize all available spectrum resources, the Wi-Fi 7 standard defines multi-link aggregation technologies, including the MAC architecture of enhanced multi-link aggregation, multi-link channel access, and multi-link transmission.

NOTE

- The Features marked with asterisks (*) can be implemented through software upgrade.

Wi-Fi 7 Application Scenarios

New functions introduced by Wi-Fi 7 significantly improve the data transmission rate and deliver lower latency. These highlights contribute to the development of emerging applications, such as:

- Video streaming
- Video/Audio conference
- Online gaming

- Real-time collaboration
- Cloud/Edge computing
- Industrial IoT
- Immersive AR/VR
- Interactive telemedicine

Basic Specifications

Fit AP Mode

Item	Description
WLAN features	<p>Compliance with IEEE 802.11be and compatibility with IEEE 802.11a/b/g/n/ac/ax</p> <p>Maximum ratio combining (MRC)</p> <p>Cyclic Delay Diversity (CDD)/Cyclic Shift Diversity (CSD)</p> <p>Beamforming</p> <p>Multi-user multiple-input multiple-output (MU-MIMO)</p> <p>Orthogonal frequency division multiple access (OFDMA)</p> <p>Preamble puncturing</p> <p>Per-packet power control</p> <p>BSS Color</p> <p>TxBF</p> <p>Compliance with 4096-quadrature amplitude modulation (QAM) and compatibility with 1024-QAM, 256-QAM, 64-QAM, 16-QAM, 8-QAM, quadrature phase shift keying (QPSK), and binary phase shift keying (BPSK)</p> <p>Low-density parity-check (LDPC)</p> <p>Frame aggregation, including A-MPDU (Tx/Rx) and A-MSDU (Tx/Rx)</p> <p>802.11 dynamic frequency selection (DFS)</p> <p>Short guard interval (GI) in 20 MHz, 40 MHz, 80 MHz, and 160 MHz modes</p> <p>Wi-Fi multimedia (WMM) for priority-based data processing and forwarding</p> <p>WLAN channel management and channel rate adjustment</p> <p>Automatic channel scanning and interference avoidance</p> <p>NOTE</p> <p>For detailed management channels, see the Country Codes & Channels Compliance.</p> <p>Service set identifier (SSID) hiding configuration for each AP, supporting Chinese SSIDs</p> <p>Signal sustain technology (SST)</p> <p>Unscheduled automatic power save delivery (U-APSD)</p> <p>Control and Provisioning of Wireless Access Points (CAPWAP)</p> <p>Automatic AP onboarding</p> <p>Extended Service Set (ESS)</p> <p>Multi-user call admission control (CAC)</p> <p>Advanced cellular coexistence (ACC), minimizing the impact of interference from cellular networks</p> <p>802.11k and 802.11v smart roaming</p> <p>802.11r fast roaming (≤ 50 ms)</p>
Network features	<p>Compliance with IEEE 802.3ab</p> <p>Auto-negotiation of the rate and duplex mode, and automatic switchover between Media Dependent</p>

Item	Description
	<p>Interface (MDI) and Media Dependent Interface Crossover (MDI-X)</p> <p>Compatibility with IEEE 802.1Q</p> <p>SSID-based VLAN assignment</p> <p>Eth-Trunk function</p> <p>Management channel of the AP's uplink port in tagged and untagged mode</p> <p>DHCP client, obtaining IP addresses through DHCP</p> <p>Tunnel data forwarding and direct data forwarding</p> <p>Application identification and QoS classification to improve voice quality for popular applications, such as Zoom, QQ, and WeChat</p> <p>STA isolation in the same VLAN</p> <p>IPv4/IPv6 access control list (ACL)</p> <p>Link Layer Discovery Protocol (LLDP)</p> <p>Service holding upon CAPWAP link disconnection in Fit AP mode</p> <p>Unified authentication on the AC in Fit AP mode</p> <p>AC dual-link backup in Fit AP mode</p> <p>Telemetry in Fit AP mode, quickly collecting AP status and application experience parameters</p>
QoS features	<p>WMM power save</p> <p>Priority mapping for upstream packets and flow-based mapping for downstream packets</p> <p>Queue mapping and scheduling</p> <p>User-based bandwidth limiting</p> <p>Adaptive bandwidth management (automatic bandwidth adjustment based on the user quantity and radio environment) to improve user experience</p> <p>Airtime scheduling</p> <p>Air interface HQoS scheduling</p> <p>VIP bandwidth reservation</p> <p>VIP FastPass</p> <p>Per-packet power control</p>
Security features	<p>Open system authentication</p> <p>WPA2-PSK authentication and encryption (WPA2-Personal)</p> <p>WPA2-802.1X authentication and encryption (WPA2-Enterprise)</p> <p>WPA3-SAE authentication and encryption (WPA3-Personal)</p> <p>WPA3-802.1X authentication and encryption (WPA3-Enterprise)</p> <p>WPA-WPA2 hybrid authentication</p> <p>WPA2-WPA3 hybrid authentication</p> <p>WPA2-PPSK authentication and encryption</p> <p>Wireless intrusion detection system (WIDS) and wireless intrusion prevention system (WIPS), including rogue device detection and containment, attack detection and dynamic blacklist, and STA/AP blacklist and whitelist</p> <p>802.1X authentication, MAC address authentication, and Portal authentication</p> <p>DHCP snooping</p> <p>802.11w Protected Management Frames (PMF)</p> <p>Wi-Fi Shield</p>
EAP types	<p>EAP-TLS, EAP-TTLS, EAP-PEAP, EAP-CHAP, EAP-SIM, EAP-AKA, EAP-GTC, EAP-FAST, EAP-PEAP, EAP-MD5, EAP-MSCHAPv2, PEAPv0, PEAPv1</p>

Item	Description
Maintenance features	Unified AP management and maintenance on the AC Automatic AP onboarding, automatic configuration loading, and plug-and-play (PnP) Automatic batch upgrade STelnet using SSHv2 SFTP using SSHv2 Remote wireless O&M through the Bluetooth serial port System status alarm

Cloud-Managed AP Mode

Item	Description
WLAN features	Compliance with IEEE 802.11be and compatibility with IEEE 802.11a/b/g/n/ac/ax Maximum ratio combining (MRC) Cyclic Delay Diversity (CDD)/Cyclic Shift Diversity (CSD) Beamforming Multi-user multiple-input multiple-output (MU-MIMO) Orthogonal frequency division multiple access (OFDMA) Preamble puncturing Per-packet power control BSS Color TxBF Compliance with 4096-quadrature amplitude modulation (QAM) and compatibility with 1024-QAM, 256-QAM, 64-QAM, 16-QAM, 8-QAM, quadrature phase shift keying (QPSK), and binary phase shift keying (BPSK) Low-density parity-check (LDPC) Frame aggregation, including A-MPDU (Tx/Rx) and A-MSDU (Tx/Rx) 802.11 dynamic frequency selection (DFS) Short guard interval (GI) in 20 MHz, 40 MHz, 80 MHz, and 160 MHz modes Wi-Fi multimedia (WMM) for priority-based data processing and forwarding WLAN channel management and channel rate adjustment Automatic channel scanning and interference avoidance NOTE For detailed management channels, see the Country Codes & Channels Compliance . Service set identifier (SSID) hiding configuration for each AP, supporting Chinese SSIDs Signal sustain technology (SST) Unscheduled automatic power save delivery (U-APSD) Automatic AP onboarding 802.11k and 802.11v smart roaming 802.11r fast roaming (≤ 50 ms) Advanced cellular coexistence (ACC), minimizing the impact of interference from cellular networks
Network features	Compliance with IEEE 802.3ab Auto-negotiation of the rate and duplex mode and automatic switchover between Media Dependent

Item	Description
	Interface (MDI) and Media Dependent Interface Crossover (MDI-X) Compatibility with IEEE 802.1Q SSID-based VLAN assignment DHCP client, obtaining IP addresses through DHCP STA isolation in the same VLAN IPv4/IPv6 access control list (ACL) Unified authentication on the cloud management platform Network address translation (NAT) Telemetry, quickly collecting AP status and application experience parameters
QoS features	WMM power save Priority mapping for upstream packets and flow-based mapping for downstream packets Queue mapping and scheduling User-based bandwidth limiting Adaptive bandwidth management (automatic bandwidth adjustment based on the user quantity and radio environment) to improve user experience VIP bandwidth reservation Airtime scheduling Air interface HQoS scheduling VIP FastPass
Security features	Open system authentication WPA2-PSK authentication and encryption (WPA2-Personal) WPA2-802.1X authentication and encryption (WPA2-Enterprise) WPA3-SAE authentication and encryption (WPA3-Personal) WPA3-802.1X authentication and encryption (WPA3-Enterprise) WPA-WPA2 hybrid authentication WPA2-WPA3 hybrid authentication WPA2-PPSK authentication and encryption 802.1X authentication, MAC address authentication, and Portal authentication DHCP snooping Wi-Fi Shield
EAP types	EAP-TLS, EAP-TTLS, EAP-PEAP, EAP-CHAP, EAP-SIM, EAP-AKA, EAP-GTC, EAP-FAST, EAP-PEAP, EAP-MD5, EAP-MSCHAPv2, PEAPv0, PEAPv1
Maintenance features	Unified AP management and maintenance on the cloud management platform Automatic AP onboarding, automatic configuration loading, and PnP Batch upgrade STelnet using SSHv2 SFTP using SSHv2 Remote wireless O&M through the Bluetooth serial port Real-time user configuration monitoring and fast fault locating using the NMS System status alarm Network Time Protocol (NTP)

Technical Specifications

Item	Description	
Technical specifications	Dimensions (H x W x D)	61 mm x 220 mm x 220 mm
	Weight	1.47 kg
	Port type	1 x 100M/1000M/2.5GE/5GE electrical port 1 x 10M/100M/1000M electrical port 1 x USB port NOTE The 5GE and GE electrical ports support PoE input.
	IoT expansion	Two built-in IoT slots (PCIe), supporting IoT expansion such as ZigBee, RFID, and Thread NOTE The Bluetooth function is unavailable when two serial port IoT cards are used at the same time.
	Bluetooth	BLE 5.4
	LED indicator	Indicates the power-on, startup, running, alarm, and fault states of the system.
Power specifications	Power input	<ul style="list-style-type: none"> DC: 43.2 V to 57.6 V PoE power supply: in compliance with 802.3bt/at (dual PoE inputs for hot backup) NOTE <ul style="list-style-type: none"> 802.3at/af power supply restrictions are detailed in the Info-Finder.
	Maximum power consumption	<ul style="list-style-type: none"> 23.9 W (excluding USB and IoT cards) NOTE The actual maximum power consumption depends on local laws and regulations.
Environmental specifications	Operating temperature	-10°C to +50°C
	Storage temperature	-40°C to +70°C
	Operating humidity	5% to 95% (non-condensing)
	Altitude	-60 m to +5000 m
	Atmospheric pressure	53 kPa to 106 kPa
Radio specifications	Antenna type	Built-in smart antennas
	Antenna gain	2.4 GHz: 4 dBi 5 GHz: 5 dBi 6 GHz: 5 dBi


Item	Description		
		<p> NOTE</p> <p>The preceding gains are the peak gains of a single antenna. When all WLAN 2.4 GHz, 5 GHz, or 6 GHz antennas are combined, the equivalent antenna gain is 1 dBi for 2.4 GHz radios, 2 dBi for 5 GHz radios, or 2 dBi for 6 GHz radios.</p>	
	Maximum number of SSIDs for each radio	16	
	Maximum transmit power	<p>Mode 1</p> <ul style="list-style-type: none"> 2.4 GHz (2x2): 23 dBm (combined power) 5 GHz (4x4): 26 dBm (combined power) 6 GHz (2x2): 23 dBm (combined power) <p>Mode 2</p> <ul style="list-style-type: none"> 2.4 GHz (4x4): 26 dBm (combined power) 5 GHz (4x4): 26 dBm (combined power) <p> NOTE</p> <p>The actual transmit power depends on local laws and regulations.</p>	
	Frequency bands	<p>2.400 to 2.4835 GHz ISM</p> <p>5.150 to 5.250 GHz U-NII-1</p> <p>5.250 to 5.350 GHz U-NII-2A</p> <p>5.470 to 5.725 GHz U-NII-2C</p> <p>5.725 to 5.850 GHz U-NII-3/ISM</p> <p>5.925 to 6.425 GHz U-NII-5</p> <p>6.425 to 6.525 GHz U-NII-6</p> <p>6.525 to 6.875 GHz U-NII-7</p> <p>6.875 to 7.125 GHz U-NII-8</p> <p> NOTE</p> <p>The available bands and channels are dependent on the configured regulatory domain (country).</p>	

Standards Compliance


Item	Description		
Safety standards	<ul style="list-style-type: none"> UL 62368-1 EN 62368-1 	<ul style="list-style-type: none"> IEC 62368-1 	<ul style="list-style-type: none"> GB 4943.1
Radio standards	<ul style="list-style-type: none"> ETSI EN 300 328 	<ul style="list-style-type: none"> ETSI EN 301 893 	
EMC standards	<ul style="list-style-type: none"> EN 301 489-1 EN 301 489-17 EN 60601-1-2 	<ul style="list-style-type: none"> GB 9254 GB 17625.1 GB 17625.2 	<ul style="list-style-type: none"> IEC/EN61000-4-2 IEC/EN 61000-4-3 IEC/EN 61000-4-4

Item	Description		
	<ul style="list-style-type: none"> • EN 55024 • EN 55032 • EN 55035 	<ul style="list-style-type: none"> • CISPR 24 • CISPR 32 • CISPR 35 	<ul style="list-style-type: none"> • IEC/EN 61000-4-5 • IEC/EN61000-4-6 • ICES-003
IEEE standards	<ul style="list-style-type: none"> • IEEE 802.11a/b/g • IEEE 802.11n • IEEE 802.11ac • IEEE 802.11ax • IEEE 802.11be 	<ul style="list-style-type: none"> • IEEE 802.11h • IEEE 802.11d • IEEE 802.11e • IEEE 802.11k 	<ul style="list-style-type: none"> • IEEE 802.11v • IEEE 802.11w • IEEE 802.11r
Security standards	<ul style="list-style-type: none"> • 802.11i, Wi-Fi Protected Access (WPA), WPA2, WPA2-Enterprise, WPA2-PSK, WPA3 • 802.1X • Advanced Encryption Standards (AES), Temporal Key Integrity Protocol (TKIP), WEP, Open • EAP Type(s) 		
EMF	<ul style="list-style-type: none"> • EN 62311 	<ul style="list-style-type: none"> • EN 50385 	
RoHS	<ul style="list-style-type: none"> • Directive 2002/95/EC & 2011/65/EU • (EU)2015/863 		
Reach	<ul style="list-style-type: none"> • Regulation 1907/2006/EC 		
WEEE	<ul style="list-style-type: none"> • Directive 2002/96/EC & 2012/19/EU 		


Antennas pattern

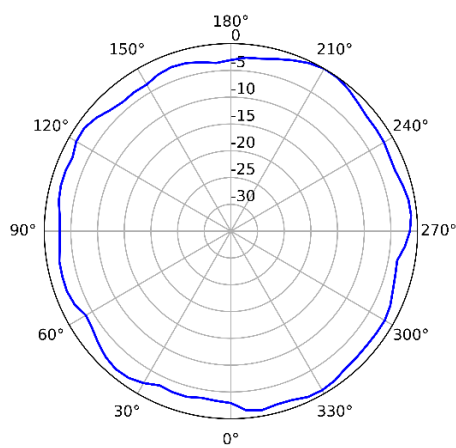


2.4GHz (Horizontal)

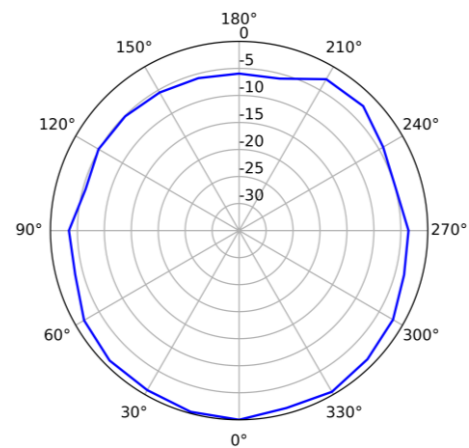


2.4GHz (Vertical)

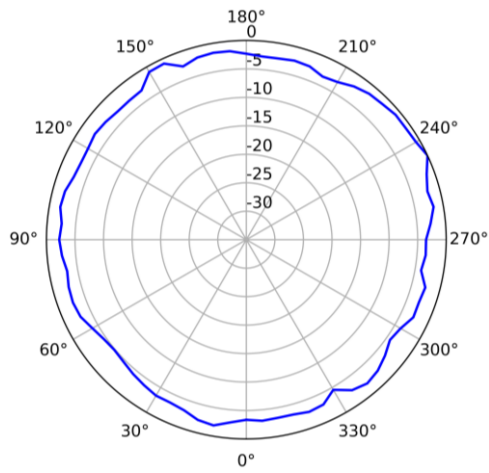


5GHz (Horizontal)

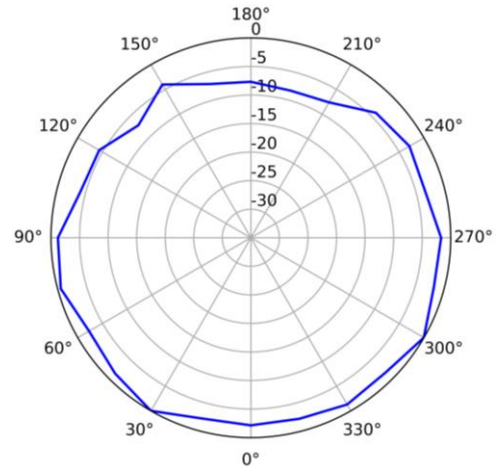

5GHz (Vertical)

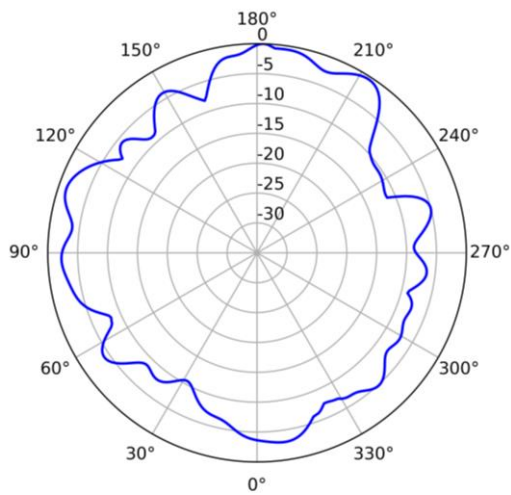

6GHz (Horizontal)

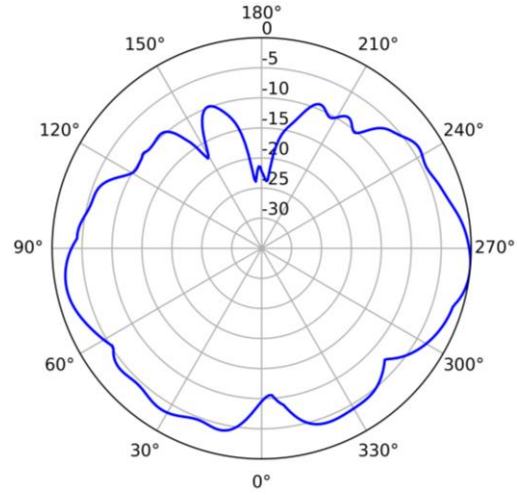

6GHz (Vertical)

More Information

For more information about Huawei WLAN products, visit <http://e.huawei.com/en/> or contact us in the following ways:

- Global service hotline: <http://e.huawei.com/en/service-hotline>
- Logging in to the Huawei Enterprise Technical Support Website: <http://support.huawei.com/enterprise/>
- Sending an email to the customer service mailbox: support_e@huawei.com

Copyright © Huawei Technologies Co., Ltd. 2024. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

Trademarks and Permissions



HUAWEI and other Huawei trademarks are trademarks of Huawei Technologies Co., Ltd.

All other trademarks and trade names mentioned in this document are the property of their respective holders.

Notice

The purchased products, services and features are stipulated by the contract made between Huawei and the customer. All or part of the products, services and features described in this document may not be within the purchase scope or the usage scope. Unless otherwise specified in the contract, all statements, information, and recommendations in this document are provided "AS IS" without warranties, guarantees or representations of any kind, either express or implied.

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.

Huawei Technologies Co., Ltd.

Address: Huawei Industrial Base Bantian, Longgang
Shenzhen 518129 People's Republic of China

Website: www.huawei.com