



Mega System Technologies, Inc.

Contents

1. General Specification
2. Power Specification
3. Pin Assignment
4. Signal Specification
5. Environment Specification
6. Dimension and Outlook
7. Packing



1. General Specification

CPU	ARM 300MHz 32Bit
System Clock	300MHz
Flash Memory	128M Byte
SDRAM	128M Byte
LED	4
Watch Dog	Yes
USBPort	1
Modem Port	No
EnvironmentPort	No
Real Time Clock	Yes
LCD Display	No
LAN Interface	10M/100M UTP
Ethernet Throughput	1620K Byte per seconds
Ethernet Latency	0.759 milliseconds

2. Power Specification

NetAgent9

ITEM	Minimum	Maximum
DC Input Voltage	+5V	+15V
DC Input Current		6W Maximum

3. Pin Assignment

Pin	Input/Output	Description
P1 GND	GND	Ground PIN
P2 PowerIn	Input	DC power input.
P3 RS232_TXD	Output	+5.5V and -5.5V Voltage level for RS232
P4 RS232_RXD	Input	-3V to -15V for logic '1', +3V to +15V for logic '0'
P5-P7 No USE		
P8 SNMPSIG		NetAgent cardplug in detect, connectto PIN 10
P9 GND	GND	Ground PIN
P10 SNMPSIG		NetAgent cardplug in detect, connectto PIN 8
P11-P26 No Use		



4. Signal Specification

Receiver Inputs

PARAMETER	CONDITIONS	MIN	TYP	MAX
Input Voltage Range		-25V		+25 V
Input Threshold Low	TA = +25°C	+0.6V	+1.2V	
Input Threshold High	TA = +25°C		+1.5V	+2.4V
Input Hysteresis			0.3 V	
Input Resistance	TA = +25°C	3 k ohm	5 k ohm	7k ohm

Transmitter Outputs

PARAMETER	CONDITIONS	MIN	TYP	MAX
Output Voltage Swing	All transmitter outputs loaded with 3k ohm to ground	±5.0V	±5.4V	
Output Resistance	TA = +25°C	300	10M	
Output Short-Circuit Current			±35 mA	±60 mA

USB Port

Parameter	Description
Output Power	Maximum 500mA
USB Function	Universal Serial Bus Specification Rev. 2.0
Data Transfer	Supports data transfer at High-speed(480Mbit/sec), Full-speed(12Mbit/sec) and Low-speed (1.5Mbit/s)

5. Environment Specification

PARAMETER	CONDITIONS	Minimum	Maximum
Operating Temperature		0 °C	60 °C
Storage Temperature		-40 °C	85 °C
Operating Humidity	Non-Condensing	10% RH	90% RH
Storage Humidity	Non-Condensing	5% RH	95% RH

EMI
FCC Class B, CE




Mega System Technologies, Inc.

6. Dimension and Outlook

The whole package includes the following items.

A. NetAgent9 Module

Dimension	81.1mm(L) x 52mm(W) x 25.8mm(H)
Weight	30g±2g

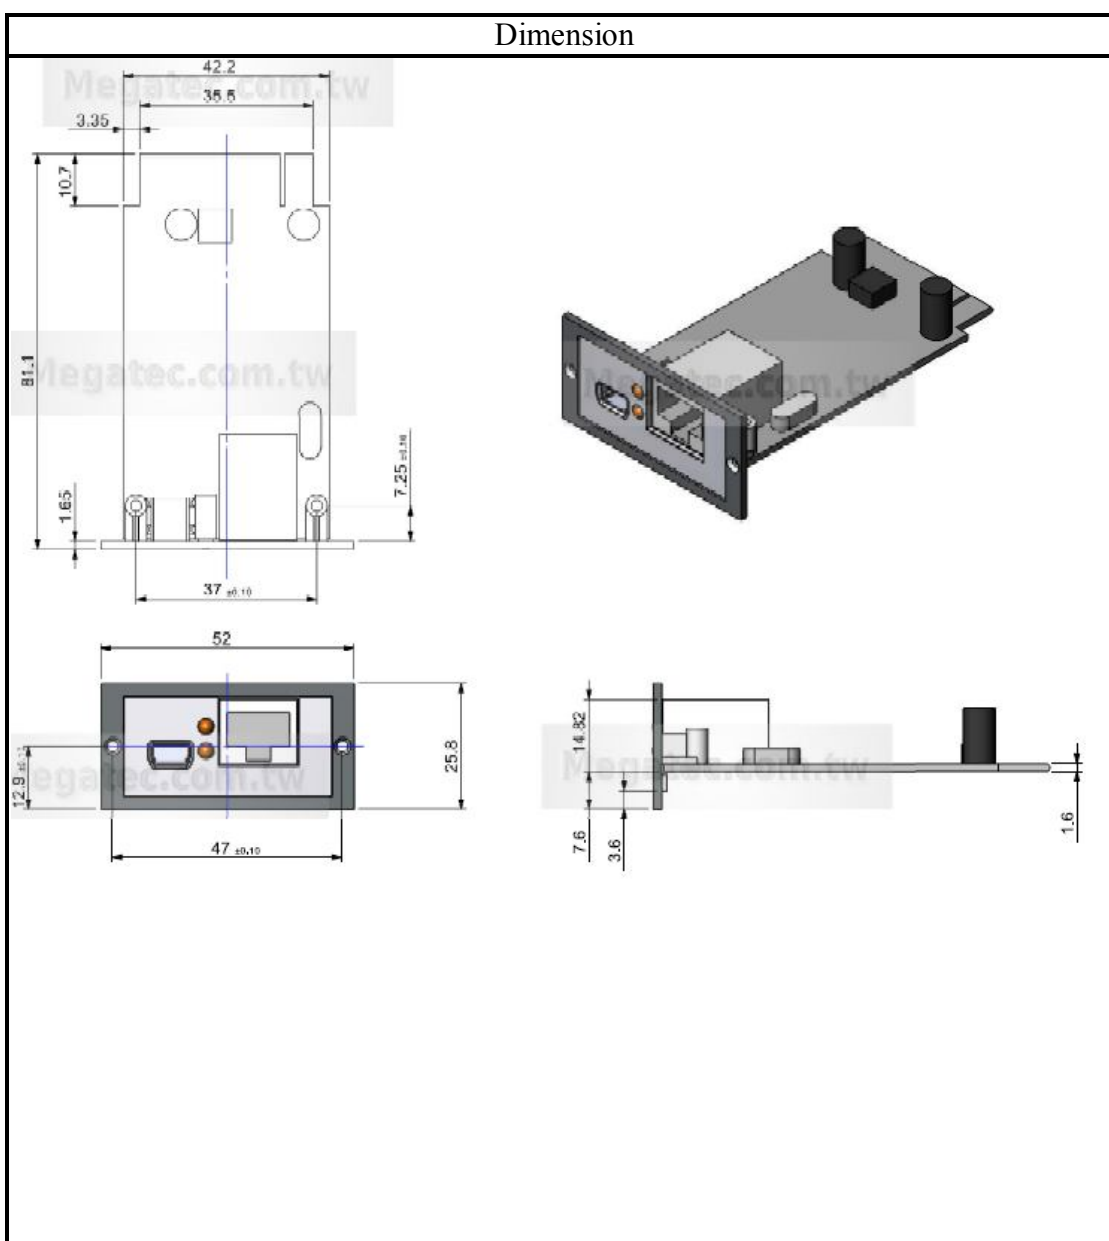

Outlook

Top view



Bottom view





Mega System Technologies, Inc.

B. NetAgent Utility CD

Dimension	12cm diameter
Weight	16g±1g
Envelope	In a plastic CD envelope, 15cm(L) x 13cm(W)

Please refer to the “NetAgent Utility” CD Specification for the detail contents inside the CD.

NetAgent Utility

The best power management over networking for UPS

7CD-521-19-LF V5.8

Contents:
Netility v5.1
ClientMate v6.0
SNMPView v5.8
SMS Server v1.7
iMConfig v1.3
Time Server

OS Supported:
Windows 2000, Windows XP
Windows Vista, Windows 7
Windows 8, Windows 8.1
Windows 10
Windows Server 2003
Windows Server 2008
Windows Server 2012
Linux, FreeBSD, MAC

NMS Supported:
HP Open View
SUN SunNet Manager
IBM NetView
Novell NMS
Accton AccView
MegaTec SNMPView
Other SNMP Compliant NMSs

Quick Start
Mega System Technologies, Inc.
<http://www.megatec.com.tw/>

All trademarks and registered trademarks belong to their respective owners.



Mega System Technologies, Inc.

C. Shielding Bag

Dimension	150mm(L) x 95mm(W)
Weight	1.9g±0.5g



D. Desiccant

Dimension	48mm(L) x 39mm(W)
Weight	2.1g±0.5g





Mega System Technologies, Inc.

7. Packing

Internal packaging

Dimension	80.1mm(L) x 51.7mm(W) x 25.7mm(H)
Weight	34g±5g
Envelope	In a plastic bag, 15cm(L) x 9.5cm(W)

