

SNR-TRS-25-LX100-20 Series

Single Mode 1310nm 100M/155M SDH/SONET

Duplex SFF Transceiver

RoHS6 Compliant

Features

- Duplex LC Single-Mode Transceiver
- Operating Data Rate up to 155Mbps
- 15km with 9/125µm SMF
- Single 3.3V Power supply
- LVPECL Signal Input/Output
- LVTTTL Transmitter Disable Input
- LVPECL Signal Detect Output
- Small Form Factor 2X5 pin Package
- Class 1 FDA and IEC60825-1 Laser Safety

Compliant

- Operating Case Temperature
Standard: 0°C ~+70°C
Industrial: -40°C ~+85°C

Applications

- Fast Ethernet
- SONET/SDH Equipment Interconnect
- Fiber Channel Links
- Other Optical Link

Ordering Information

Part No.	Input	Output	SD	Temp.
SNR-TRS-25-LX100-20	AC	AC	TTL	Standard

Regulatory Compliance

Feature	Standard	Performance
Electrostatic Discharge (ESD) to the Electrical Pins	MIL-STD-883G Method 3015.7	Class 1C (>1000 V)
Electrostatic Discharge to the enclosure	EN 55024:1998+A1+A2 IEC-61000-4-2 GR-1089-CORE	Compliant with standards
Electromagnetic Interference (EMI)	FCC Part 15 Class B EN55022:2006 CISPR 22B :2006 VCCI Class B	Compliant with standards Noise frequency range: 30MHz to 6GHz. Good system EMI design practice required to achieve Class B margins. System margins are dependent on customer host board and chassis design.
Immunity	EN 55024:1998+A1+A2 IEC 61000-4-3	Compliant with standards. 1KHz sine-wave, 80% AM, from 80MHz to 1GHz. No effect on transmitter/receiver performance is detectable between these limits.
Laser Eye Safety	FDA 21CFR 1040.10 and 1040.11 EN (IEC) 60825-1:2007 EN (IEC) 60825-2:2004+A1	CDRH compliant and Class I laser product. TüV Certificate No. 50135086
Component Recognition	UL and CUL EN60950-1:2006	UL file E317337 TüV Certificate No. 50135086 (CB scheme)
RoHS6	2002/95/EC 4.1&4.2 2005/747/EC 5&7&13	Compliant with standards ^{*note3}

Note2: For update of the equipments and strict control of raw materials, NAG has the ability to supply the customized products since Jan 1st, 2007, which meet the requirements of RoHS6 (Restrictions on use of certain Hazardous Substances) of European Union.

In light of item 5 in RoHS exemption list of RoHS Directive 2002/95/EC, Item 5: Lead in glass of cathode ray tubes, electronic components and fluorescent tubes.

In light of item 13 in RoHS exemption list of RoHS Directive 2005/747/EC, Item 13: Lead and cadmium in optical and filter glass. The three exemptions are being concerned for NAG's transceivers, because NAG's transceivers use glass, which may contain Pb, for components such as lenses, windows, isolators, and other electronic components.

Product Description

The SNR-TRS-25 series single-mode transceiver is small form factor, low power, high performance module for duplex optical data communications such as Fast Ethernet, 100BASE-FX and SONET OC-3 / SDH STM-1. This module is designed for single-mode fiber and operates at a nominal wavelength of 1310nm.

The transmitter section uses a multiple quantum well laser and is a class 1 laser compliant according to International Safety Standard IEC-60825. The receiver section uses an integrated InGaAs detector preamplifier (IDP) mounted in an optical header and a limiting post-amplifier IC. A LVPECL logic interface simplifies interface to external circuitry.

Interface information

The Signal Detect (SD, active high), normal optical input of receiver represents to a logic “1” level, which means asserted.

The following versions are available:

1. AC/AC Transceiver

Tx and Rx are AC coupling. Tx has differential 100_ load.

2. DC/DC Transceiver

Standard PECL inputs and outputs, Tx and Rx are DC coupling

Absolute Maximum Ratings

Parameter	Symbol	Min.	Max.	Unit
Storage Temperature	Ts	-40	+85	°C
Supply Voltage	Vcc	-0.5	3.6	V
Operating Relative Humidity		-	95	%

*Exceeding any one of these values may destroy the device immediately.

Recommended Operating Conditions

Parameter	Symbol		Min.	Typical	Max.	Unit
Operating Case Temperature	TA	SNR-TRS-25-LX1G-20	0		+70	°C
Power Supply Voltage	Vcc	3.3	3.15	3.3	3.45	V
Power Supply Current	Icc				300	mA
Data Rate				100/155		Mbps

Optical and Electrical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit
9µm Core Diameter SMF			15		km
Data Rate			155		Mbps
Transmitter					
Centre Wavelength	λ_C	1270	1310	1350	nm
Spectral Width (RMS)	$\Delta\lambda$			4	nm
Average Output Power ^{*(Note3)}	Pout	-15		-8	dBm
Extinction Ratio ^{*(Note4)}	ER	9			dB
Rise/Fall Time(20%~80%)	tr/tf			2	ns
Total Jitter ^{*(Note4)}	TJ			1	ns

Output Optical Eye	Telcordia GR-253-CORE and ITU-T G.957 Compliant ^{*(Note6)}				
TX_Disable Assert Time	t_off			10	us
Receiver					
Center Wavelength	λ_C	1260		1600	nm
Receiver Sensitivity ^{*(Note5)}	Pmin			-28	dBm
Receiver Overload	Pmax	-8			dBm
Return Loss		14			dB
SD De-Assert	SDD			-31	dBm
SD Assert	SDA	-45			dBm
SD Hysteresis ^{*(Note7)}		0.5			dB



Note2: LVPECL logic, internally AC coupled.

Note3: Output is measured by coupling into a 9/125µm single-mode fiber.


Note4: Filtered, measured with a PRBS 2₂₃-1 test pattern @155Mbps.

Note5: Minimum average optical power measured at BER less than 1E-12, with a 2₂₃-1 NRZ PRBS and ER=9 dB.


Note6: Eye Pattern Mask Note7: LOS Hysteresis(SD signal coincides with the Los signal inversion)

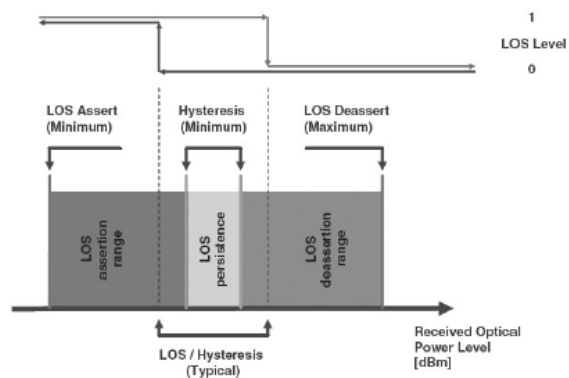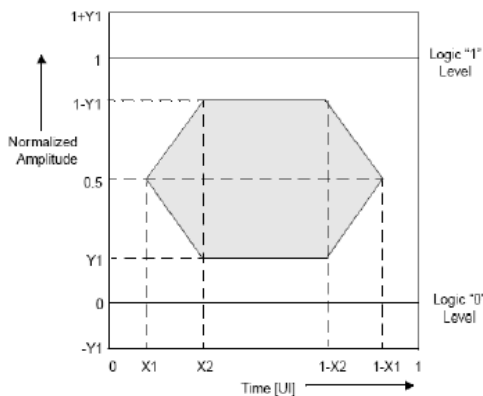

Functional Description of Transceiver

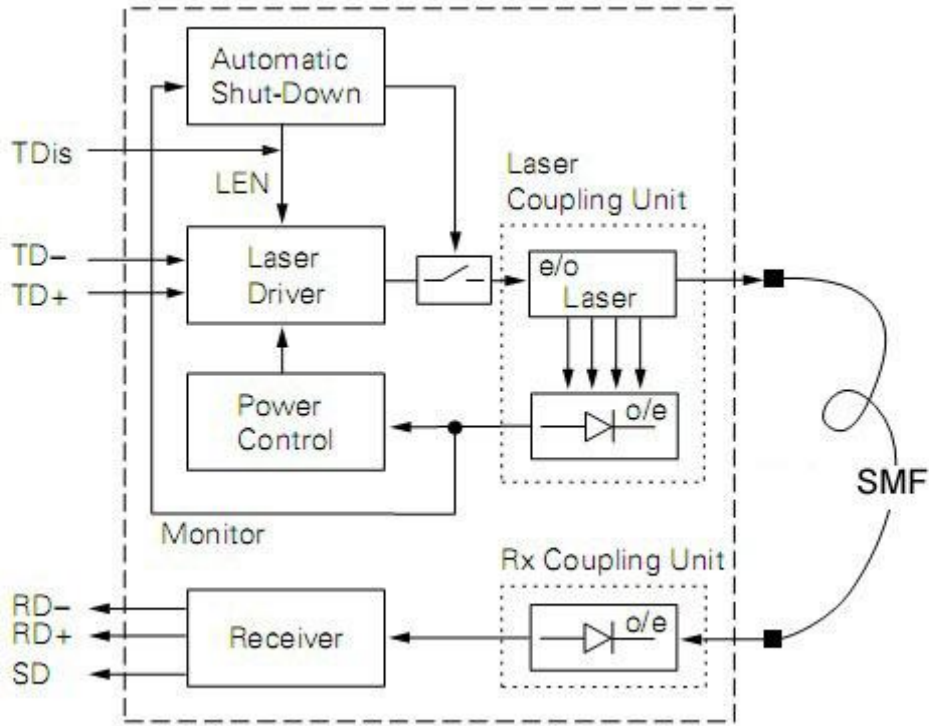


SFF Transceiver Electrical Pad Layout

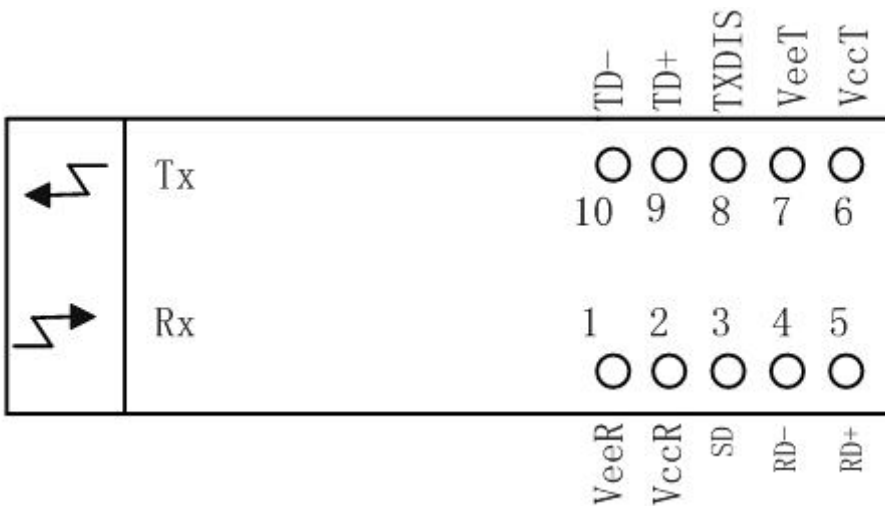

Pin Function Definitions


Pin	Name	Description
	MS	Mounting Studs, Case isolated from circuit ground
1	VeeR	Receiver Signal Ground
2	VccR	3.3V DC power for receiver section
3	SD	Signal Detect Output (LVPECL) "1" - "Signal valid", "0" - "Lose of signal"
4	RD-	Received Data Out Bar (LVPECL), without termination inside
5	RD+	Received Data Out (LVPECL), without termination inside
6	VccT	3.3V DC power for transmitter section
7	VeeT	Transmitter Signal Ground
8	TXDIS	Transmitter Disable (LVTTTL), "1" - Disable, "0" - Enable
9	TD+	Transmitter Data In (LVPECL), without termination inside
10	TD-	Transmitter Data In Bar (LVPECL), without termination inside

Recommended Circuit

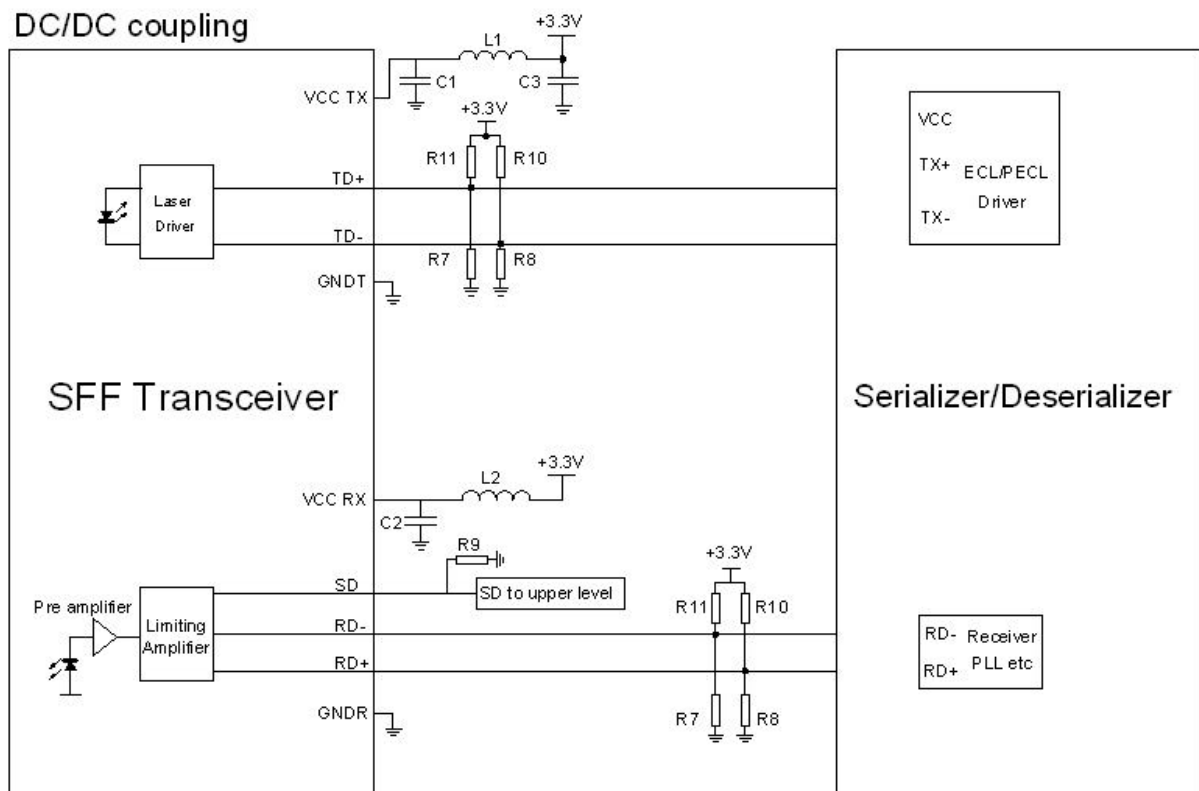

C1 C2 C3=4.7uF
 L1 L2=1uH
 R7 R8=82Ω(3.3V)
 (Depends on serdes chips used)
 R9=270Ω(3.3V)
 R10 R11=127Ω(3.3V)
 (Depends on serdes chips used)

Mechanical Specifications

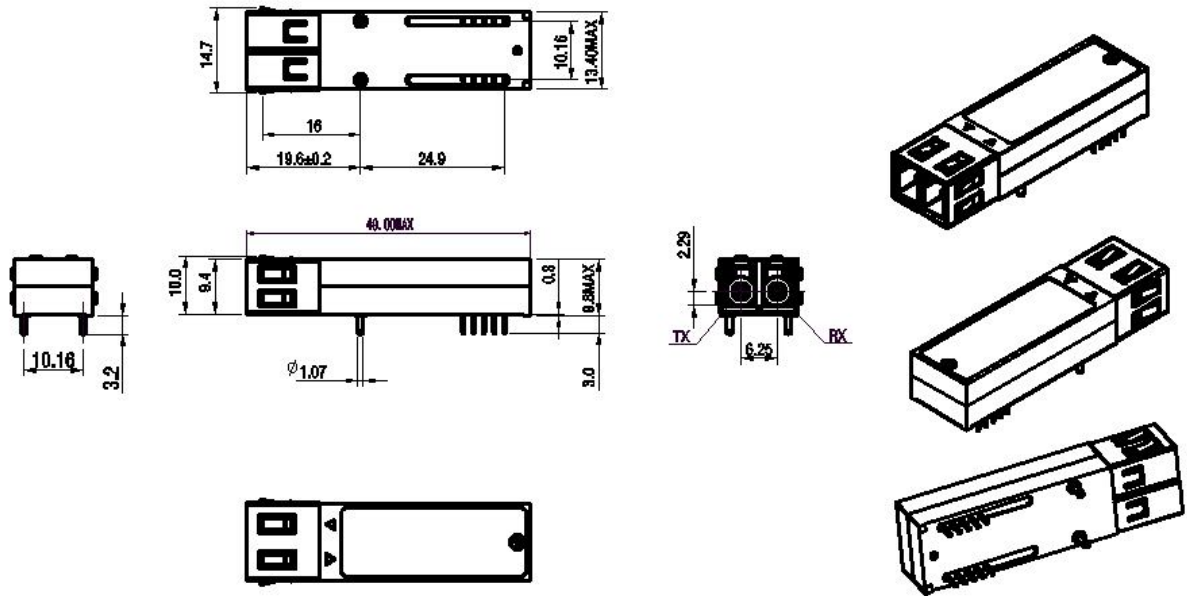

GUARANTEE:



CONTACT:

Address: Building 56/2, Predelnaya Street, Yekaterinburg, Russia

Tel: +7(343) 379-98-38

Fax: +7(343) 379-98-38

E-mail: info@nag.ru

Online shop: <http://shop.nag.ru>