


TECHNICAL DESCRIPTION

SNR-VP-52-P

SIP phone



SNR-VP-52-Pisa phone that combines a wide range of functionality, excellent quality and a high level of security. This is a budget SIP phone, ideal for working in both carrier and corporate networks. All models of SNR-VP-5x phones are compatible with Asterisk-Based systems, as well as with any other PBX of various vendors that support the SIP protocol.

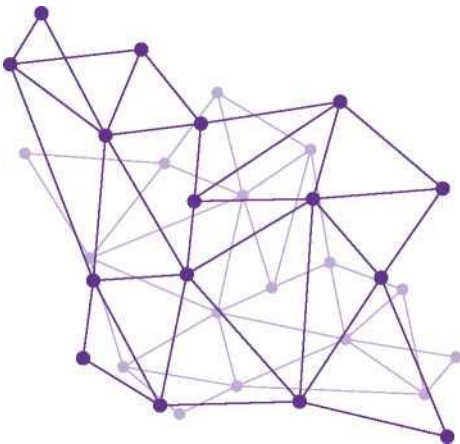

Key features:

- HD Voice
- 2 SIP Accounts
- 2 Line keys
- 3-way Conference
- 2.3" 132*64 Graphical LCD with Backlight
- Dual-port 10/100Mbps Ethernet
- Stand with 2 adjustable angles
- Full Compatible with Asterisk

Call features:

- 2 SIP Accounts
- Call Waiting
- Call Forward
- Blind/attended transfer
- Call hold, Call mute, DND mode
- Speed Dialing, Hotline
- Redial, Call Return
- Auto-redial, Auto-answer
- Dial Plan
- 3-way conference
- Peer Dialing

Phone features:

- 2 Lines (Support 2 SIP account)
- Support Call Waiting, Call Forward, Call Transfer
- Call on Hold, Mute, Auto-answer, Redial, DND
- Local 3-Way Conference
- Volume Adjustable, Ring tones Selectable
- Speed Dial, Hotline
- Multicast Paging
- Daylight Saving Time
- Country Ringtone Signal
- Direct IP call
- Auto Redial, Call Return
- Dial Plan
- XML Browser
- Action URL/URI
- Phonebook (500 entries), Blacklist (100 entries), Call logs (100 entries)
- 5 Remote Phone Book URL Supported
- LDAP

- Multi-Language Support



Management:

- Auto provisioning using FTP/TFTP/HTTP/HTTPS/PnP
- Dial through IP PBX Using Phone Number
- Dial through IP PBX Using URL Address
- Configuration Managements with Web, Keypad on the phone, and AutoProvisioning
- SNMP
- TR069
- Package Tracing Export, System Log

Audio:

- HD Voice: HD Handset, HD Speaker
- Wideband Codec: G.722
- Narrowband Codec: PCMA, PCMU, G.729, G723_53, G723_63, G726_32
- VAD, CNG, Echo Cancellor
- PLC, AJB, AGC
- Full-Duplex Hands-free Speakerphone with AEC

IP-PBX Features:

- SMS, Voicemail, MWI
- Music On-hold, Intercom, Multicast
- Call Pickup, Call Pickup in Group
- Anonymous Call
- Anonymous Call Rejection

Physical Features:

- DSPG Chipset
- 8M Bytes Flash Memory
- 2.3" 132*64 Graphical LCD with Backlight
- 31 Keys (with 4 Soft Keys, 10 Programmable keys)
- 1 Voice Mail Light
- 2 RJ45 10/100 Ethernet Ports
- PoE: IEEE 802.3a
- 1*RJ9(4P4C) Handset Port and 1*1*RJ9(4P4C) Headset Port
- AC Power Adapter: Input: AC 100-240V; Output: DC 5V/1A
- Operating Humidity: -10~95%
- Storage Temperature: -10~50°C
- Gift Box Size: 209 x199 x 104 (mm),weight: 0.8 kg

Ordering information:

Vendor code	Description
SNR-VP-52-P	IP phone SNR-VP-52, 2 SIP accounts, PoE, without PSU



NAG LLC

Yekaterinburg: 620016, Krasnolesya, str.12a

Phone: +7 (343) 379 98 38.

E-mail: sales@nag.ru

