


TECHNICAL DESCRIPTION

SNR-VP-76-CG-P

SIP phone

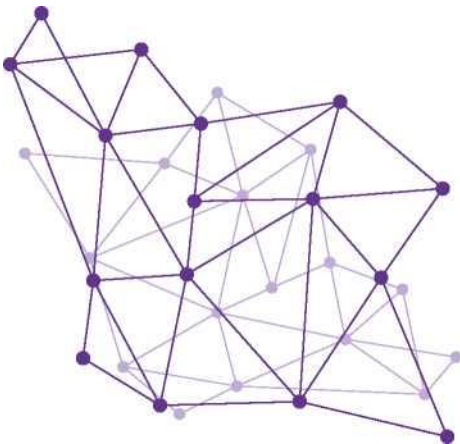

SNR-VP-76-CG-P is a phone that has an interesting, memorable design, thanks to which it will become a workplace decoration. The phone will find its application in all areas of small and medium-sized businesses.

The phone is equipped with a 2.8-inch color screen with a resolution of 240x320 pixels. SNR-VP-76-CG-P supports working with 6 SIP accounts and the possibility of a 5-way conference and 2 Gigabit Ethernet ports and 15 programmable keys.

SNR-VP-76-CGP - provides excellent full-duplex communication. The highest sound quality, regardless of the conditions of use, is something that everyone will be satisfied with.

Key features:

- HD Voice
- Up to 6 SIP Accounts
- 30 Line keys
- 5-way Conference
- 2.8" 320 x 240 pixel TFT LCD with Backlight
- Dual-port Gigabit Ethernet
- Power over Ethernet
- Support EHS wireless headset (Plantronics, Jabra, Sennheiser)
- Full Compatible with 3CX, Asterisk, Yeastar, Xorcom, VoIP.ms, Broadsoft, FreeSWITCH Platform etc.

Call features:

- 6 SIP Accounts
- Call Waiting
- Call Forward
- Blind/attended transfer
- Call hold, Call mute, DND mode
- Speed Dialing, Hotline
- Redial, Call Return
- Auto-redial, Auto-answer
- Dial Plan
- 5-way conference
- Peer Dialing

Phone features:

- Adjustable Voice Volume
- Selectable Ring Tones
- XML Browser
- Action URL/URI
- Keyboard lock
- Phonebook: 1,000 Groups
- Blacklist: 100 Groups
- Call Log: 100 Logs
- Support 5 Remote Phonebook URLs
- LDAP
- Support Multiple Languages
- Support EHS wireless headset(Plantronics, Jabra, Sennheiser)

IP-PBX Features:

- SMS, Voicemail, MWI
- Music On-hold, Intercom, Multicast
- Call Pickup, Call Pickup in Group
- Anonymous Call
- Anonymous Call Rejection

Management:

- Auto provisioning:
FTP/TFTP/HTTP/HTTPS/PnP
- Configuration via HTTP/HTTPS web
- SNMP, TR069
- Network capture
- NTP/Daylight saving time
- Firmware upgrade via web
- Syslog
- Configuration backup/restore
- Equipment Management System (NMS)

Audio:

- HD Voice
- Wideband Codec: G.722, OPUS-WB
- Narrowband Codec: PCMA, PCMU, G.729, G723, G726, AMR, OPUS, iLBC
- Echo Cancellation/Dynamic Jitter
- Voice Activity Detection (VAD)
- Comfort Noise Generation (CNG)
- Full-duplex Speaker

Physical Features:

- Color 2.8" High resolution screen (240x320)
- Dimensions(approx.): 201x203x42.5mm(WxLxD) without foot stand
- Weight(approx.): device 550g, foot stand 50g
- Input voltage: 5Vdc
- Power supply: PoE or 5Vdc power adapter
- Power consumption: 1.8W
- PoE IEEE802.3af
- Handset: 4P4C, RJ9
- Headset: 4P4C, RJ9
- Extended interface: 6P6C, RJ12
- Operation temperature: 0~40°C
- Humidity: 10% to 95% (non-condensing)
- 2xRJ45 10/100/1000M Ethernet Ports
- Wall Mountable

Ordering information:

Vendor code	Description
SNR-VP-76-CG-P	SNR-VP-76-CG-P - IP phone SNR-VP-76-CG-P, 6 SIP accounts, color display, GigE, PoE, without PSU



NAG LLC

Yekaterinburg: 620016, Krasnolesya, str.12a

Phone: +7 (343) 379 98 38.

E-mail: sales@nag.ru

