


## TECHNICAL DESCRIPTION

# SNR-VP-72-P

SIP phone

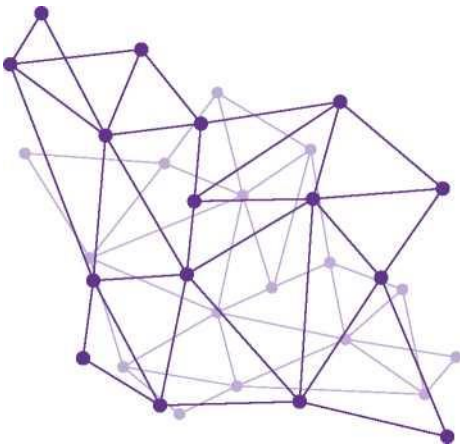

SNR-VP-72-P is an inexpensive entry-level IP phone that will find its application in various industries and business areas.

The phone has a 2.3-inch screen with a resolution of 132x64 pixels, supports working with 2 SIP accounts and the possibility of a 5-way conference. The phone is fully compatible with telephony solutions of various types and manufacturers, such as 3CX, Asterisk, Yeastar, Eltex.

SNR-VP-72-P - provides full-duplex communication and the highest sound quality, regardless of the conditions of use, which everyone will be satisfied with.

### Key features:

- HD Voice
- 2 SIP Accounts
- 2 Line keys
- 5-way Conference
- 132x64 pixel Graphical LCD with Backlight
- Dual-port 10/100Mbps Ethernet
- Support EHS wireless headset (Plantronics, Jabra, Sennheiser)
- Stand with 2 adjustable angles
- Full Compatible with 3CX, Asterisk, Yeastar,
- Xorcom, VoIP.ms, Broadsoft, FreeSWITCH Platform etc.

## Call features:

- 2 SIP Accounts
- Call Waiting
- Call Forward
- Blind/attended transfer
- Call hold, Call mute, DND mode
- Speed Dialing, Hotline
- Redial, Call Return
- Auto-redial, Auto-answer
- Dial Plan
- 5-way conference
- Peer Dialing

## Phone features:

- Adjustable Voice Volume
- Selectable Ring Tones
- XML Browser
- Action URL/URI
- Keyboard lock
- Phonebook: 1,000 Groups
- Blacklist: 100 Groups
- Call Log: 100 Logs
- Support 5 Remote Phonebook URLs
- LDAP
- Support Multiple Languages
- Support EHS wireless headset(Plantronics, Jabra, Sennheiser)

## IP-PBX Features:

- SMS, Voicemail, MWI
- Music On-hold, Intercom, Multicast
- Call Pickup, Call Pickup in Group
- Anonymous Call
- Anonymous Call Rejection

## Management:

- Auto provisioning:  
FTP/TFTP/HTTP/HTTPS/PnP
- Configuration via HTTP/HTTPS web
- SNMP, TR069
- Network capture
- NTP/Daylight saving time
- Firmware upgrade via web
- Syslog
- Configuration backup/restore
- Equipment Management System (NMS)

## Audio:

- HD Voice
- Wideband Codec: G.722, OPUS-WB
- Narrowband Codec: PCMA, PCMU, G.729, G723, G726, AMR, OPUS, iLBC
- Echo Cancellation/Dynamic Jitter
- Voice Activity Detection (VAD)
- Comfort Noise Generation (CNG)
- Full-duplex Speaker

## Physical Features:

- 132x64 pixel graphic LCD with backlight
- Dual-angle foot stand: 40° and 45°
- Dimensions(approx.):
- 180x192x36mm(WxLxD) without foot stand
- Weight(approx.): device 370g, foot stand 60g
- Input voltage: 5Vdc
- Power supply: 5Vdc power adapter or PoE
- Power consumption: 1.4W
- Handset: 4P4C, RJ9
- Headset: 4P4C, RJ9
- Operation temperature: 0~40°C
- Humidity: 10% to 95% (non-condensing)
- • 2xRJ45 10/100M Ethernet Ports
- • Wall Mountable

## Ordering information:

| Vendor code | Description  |
|-------------|--|
| SNR-VP-72-P | SNR-VP-72-P - IP phone SNR-VP-72, 2 SIP accounts, PoE, without PSU |



### NAG LLC

**Yekaterinburg:** 620016, Krasnolesya, str.12a

**Phone:** +7 (343) 379 98 38.

**E-mail:** [sales@nag.ru](mailto:sales@nag.ru)

