



### PE210G2SPI9A

#### Dual Port Fiber 10 Gigabit Ethernet PCI Express Server Adapter Intel® 82599ES Based

#### Product Description

Silicom's SFP+ 10 Gigabit Ethernet PCI Express server adapters are designed for Servers and high-end appliances.

The Silicom 10 Gigabit Ethernet PCI Express Server adapters offer simple integration into any PCI Express X8 to 10Gigabit Networks.

The performance is optimized so that system I/O is not the bottleneck in high-performance networking applications.

The Silicom SFP+ 10 Gigabit Ethernet PCI Express server adapters are based on Intel 82599ES Ethernet controller with two fully integrated Gigabit Ethernet Media Access Control (MAC) and SFP ports.

In addition to managing MAC and PHY Ethernet layer functions, the controller manages PCI Express packet traffic across its transaction, link, and physical/logical layers. Using hardware acceleration, the controller offloads tasks from the host, such as TCP/UDP/IP checksum calculations and TCP segmentation.

Silicom's SFP+ 10 Gigabit Ethernet PCI-Express Server adapters are the ideal solution for implementing multiple network segments, mission-critical high-powered networking applications and environments within high performance servers.

#### Key Features

##### SFP+ 10 Gigabit Ethernet:

10 Gigabit Ethernet Adapter with SFP cage support:

##### -XR: Copper 10SFP+Cu (Passive Direct Attach Cable):


- Compliant with the SFP+ MSA SFF-8431 specification
- Up to 10 meters

##### -SR: Fiber 10 Gigabit Ethernet 10GBASE-SR:

- 10BASE-SR with 10Gigabit 850nm Small form Factor Pluggable (SFP+)

##### -LR: Fiber 10 Gigabit Ethernet 10GBASE-LR:

- 10BASE-LR with 10Gigabit 1310nm Small form Factor Pluggable (SFP+)

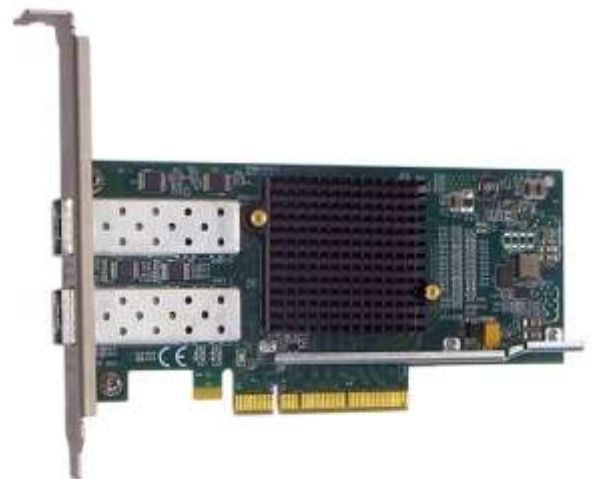

**-SRD: Fiber 1/10 Gigabit Ethernet 1000Base-SX / 10GBASE-SR:**

- 1000BASE-SX with 1G 850nM Small form Factor Pluggable (SFP+)
- 10GBASE-SR with 10Gigabit 850nM Small form Factor Pluggable (SFP+)

**-LRD: Fiber 1/10 Gigabit Ethernet 1000Base-LX / 10GBASE-LR:**

- 1000BASE-LX with 1G 1310nM Small form Factor Pluggable (SFP+)
- 10GBASE-LR with 10Gigabit 1310nM Small form Factor Pluggable (SFP+)

**-SR: Fiber 10 Gigabit Ethernet 10GBASE-SR:**

- 10 Gigabit Fiber Ethernet port supports 10GBASE-SR (850nM LAN PHY)
- 10Gigabit 850nM Small form Factor Pluggable (SFP+)

**-LR: Fiber 10 Gigabit Ethernet 10GBASE-LR:**

- 10 Gigabit Fiber Ethernet port supports 10GBASE-LR (1310nM LAN PHY)
- 10Gigabit 1310nM Small form Factor Pluggable (SFP+)

**-SRD: Fiber 1/10 Gigabit Ethernet 1000Base-SX / 10GBASE-SR:**

- 10 Gigabit Fiber Ethernet port supports 10GBASE-SR (850nM LAN PHY)
- 1Gigabit Fiber Ethernet port supports 1000BASE-SX (850nM LAN PHY)
- 1/10Gigabit 850nM Small form Factor Pluggable (SFP+)

**-LRD: Fiber 1/10 Gigabit Ethernet 1000Base-LX / 10GBASE-LR:**

- 10 Gigabit Fiber Ethernet port supports 10GBASE-LR (1310nM LAN PHY)
- 1Gigabit Fiber Ethernet port supports 1000BASE-LX (1310nM LAN PHY)
- 1/10Gigabit 1310nM Small form Factor Pluggable (SFP+)

**Host Interface:**

- PCI Express X8 lanes
- Support PCI Express Base Specification 2.0 (5GT/s)
- Low-Profile Adapter
- Low power
- SFP+ cage

**Performance Features:**

- IPV4 and IPV6 Supports for IP/ TCP and IP/UDP Receive Checksum offload
- Fragmented UDP checksum offload for Packet Reassembly
- CPU utilization- the 82599 supports reduction in CPU utilization, mainly by supporting Receive Side Coalescing (RSC)

- Support for 16 virtual machine Device Queues ( VMDq) per port
- Support Direct Cache Access (DCA)
- Advanced memory architecture reduces latency by preceding TSO packets. A TSO packet may be interleaved with other packets going to the wire
- Minimized device I/O interrupts using MSI and MSI-X
- Offload of TCP / IP / UDP checksum calculation and TCP segmentation
- Large on chip receive packet buffer (512 KB)
- Large on chip transmit packet buffer (160KB)
- Supports the VPD (Vital Product Data) capability defined in the PCI specification ver. 3.0
- Time sync- IEEE1588- Precision Time Protocol (PTP)
- Supports the BCN (Backward Congestion Notification) protocol in addition to the EEDC functionality

#### LAN Features:

- IEEE 802.x flow control support
- IEEE 802.1q VLAN tagging support
- IEEE 802.1p layer 2 priority encoding
- Jumbo Frame (up to 15.5KB)
- Link Aggregation and Load Balancing
- RFC2819 RMON MIB statistics
- TCP Segmentation Offload Up to 256KB
- Ipv6 Support for IP/TCP Receive Checksum Offload
- LEDs indicator for link/Activity

## Technical Specifications

SFP+ 10Gigabit Ethernet Technical Specifications Adapters:	
<b>SFP+ (Small Form Factor Pluggable) supports:</b>	XSFI interfaces supports 10GBase-R PCS and 10 Gigabit PMA in order to connect with SFP+ to 10GBase-SR // 1000Base-SX / 10GBase-LR and SFP+ Direct Attach
<b>10GBase-SR SFP+: IEEE Standard / Network topology:</b>	Fiber 10Gigabit Ethernet, 10GBASE-SR (850nm LAN PHY)
<b>10GBase-SR SFP+:</b>	10.3125GBd

<b>Data Transfer Rate:</b>	
<b>10GBase-SR SFP+:</b> <b>Cables and Operating distance</b> <b>Up to:</b>	62.5um, 160MHz/Km 26m 62.5um, (OM1)200MHz/Km 33m 50um, 400MHz/Km 66m 50um, (OM2)500 MHz/Km 82m 50um, (OM3)2000MHz/Km 300m
<b>10GBase-LR SFP+:</b> <b>IEEE Standard / Network topology:</b>	Fiber 10Gigabit Ethernet, 10GBASE-LR (1310nM LAN PHY)
<b>10GBase-LR SFP+:</b> <b>Data Transfer Rate:</b>	10.3125GBd
<b>10GBase-LR SFP+:</b> <b>Cables and Operating distance</b> <b>Up to:</b>	Single-Mode: 10000m at 9um
<b>10GSFP+Cu :</b> <b>IEEE Standard / Network topology:</b>	Copper 10Gigabit Ethernet, 10GSFP+Cu (Direct Attach)
<b>10000Base-SX / 10GBase-SR SFP+:</b> <b>Cables and Operating distance</b> <b>Up to:</b>	<b>10000Base-SX:</b> 62.5um, 160MHz/Km 220m 62.5um, (OM1)200MHz/Km 275m 50um, 400MHz/Km 500m 50um, (OM2)500 MHz/Km 550m 50um, (OM3)2000MHz/Km >550m <b>10GBase-SR:</b> 62.5um, 160MHz/Km 26m 62.5um, (OM1)200MHz/Km 33m 50um, 400MHz/Km 66m 50um, (OM2)500 MHz/Km 82m 50um, (OM3)2000MHz/Km 300m
<b>1000Base-LX / 10GBase-LR SFP+:</b> <b>IEEE Standard / Network topology:</b>	Fiber Gigabit Ethernet, 1000Base-LX (1310nM LAN PHY) Fiber 10Gigabit Ethernet, 10GBASE-LR (1310nM LAN PHY)
<b>1000Base-LX / 10GBase-LR SFP+:</b> <b>Data Transfer Rate:</b>	10.3125GBd / 1.25GBd

<b>1000Base-LX / 10GBase-LR SFP+:</b> <b>Cables and Operating distance Up to:</b>	<b>10000Base-LX:</b> Single-Mode: 5000m at 9um <b>10GBase-LR:</b> Single-Mode: 10000m at 9um
<b>-SR: Fiber 10GBASE-SR Ethernet Technical Specifications:</b>	
<b>Output Transmit Power:</b>	Typical: -2.33 dBm Minimum: -2.8 dBm
<b>Optical Receive Sensitivity:</b>	Typical: -13.45 dBm Maximum: -11.1 dBm
<b>Maximum Input Power:</b>	Maximum: +0.5dBm
<b>-LR: Fiber 10GBASE-LR Ethernet Technical Specifications:</b>	
<b>Output Transmit Power:</b>	Typical: -2.75 dBm Minimum: -8.2 dBm
<b>Optical Receive Sensitivity:</b>	Typical: -14.65 dBm Maximum: -12.6 dBm
<b>Maximum Input Power:</b>	Maximum: +0.5dBm
<b>-SRD: Fiber 1000BASE-SX / 10GBASE-SR Technical Specifications:</b>	
<b>Optical Output Power (1G):</b>	Minimum: -9.5 dBm
<b>Optical Receive Sensitivity (1G):</b>	Maximum: -17 dBm
<b>Maximum Input Power (1G):</b>	Maximum: +0.5dBm
<b>Output Transmit Power (10G):</b>	Minimum: -5 dBm
<b>Optical Receive Sensitivity (10G):</b>	Maximum: -11.1 dBm
<b>Maximum Input Power (10G):</b>	Maximum: +0.5dBm
<b>-LRD: Fiber 1000BASE-LX / 10GBASE-LR Technical Specifications:</b>	
<b>Optical Output Power (1G):</b>	Minimum: -11 dBm

<b>Optical Receive Sensitivity (1G):</b>	Maximum: -19 dBm
<b>Maximum Input Power (1G):</b>	Maximum: +0.5dBm
<b>Output Transmit Power (10G):</b>	Minimum: -8.2 dBm
<b>Optical Receive Sensitivity (10G):</b>	Maximum: -12.5 dBm
<b>Maximum Input Power (10G):</b>	Maximum: +0.5dBm
<b>Operating Systems Support</b>	
<b>Operating system support:</b>	Windows Linux FreeBSD VMware
<b>General Technical Specifications</b>	
<b>Interface Standard:</b>	PCI-Express Base Specification Revision 2.0 (5GT/s)
<b>Board Size:</b>	Low profile add-in card: 145.54mm X 68.91mm (5.73"X 2.713")
<b>PCI Express Card Type:</b>	X8 Lane
<b>PCI Express Voltage:</b>	+12V +- 8%
<b>PCI Connector:</b>	X8 Lane
<b>Controller:</b>	Intel 82599ES
<b>Holder:</b>	Metal Bracket
<b>Weight:</b>	150 gr (5.291 oz )
<b>Power Consumption (PE210G2SPI9A-XR):</b>	4.44 W 0.37A at 12V: Typical No SFP+
<b>Power Consumption (PE210G2SPI9A-SR):</b>	6.12 W 0.51 A at 12V: Typical, all ports operate at 10Gb/s. 5.88 W 0.49 A at 12V: Typical, No Link.
<b>Power Consumption</b>	6.24 W 0.52 A at 12V: Typical, all ports operate at 10Gb/s.

<b>(PE210G2SPI9A-LR):</b>	6.00 W 0.50 A at 12V: Typical, No Link.
<b>Operating Humidity:</b>	0%–90%, non-condensing
<b>Operating Temperature:</b>	0°C – 50°C (32°F – 122°F)
<b>Storage:</b>	-20°C–65°C (-4°F–149°F)
<b>EMC Certifications:</b>	<p>CE EN 55022: 1998 Class B Amendments A1: 2000; A2: 2003  Conducted Emissions  Radiated Emissions  CE EN 55024: 1998 Amendments A1: 2000; A2: 2003  Immunity for ITE Amendment A1: 2001  CE EN 61000-3-2 2000, Class A  Harmonic Current Emissions  CE EN 61000 3-3 1995, Amendment A1: 2001  Voltage Fluctuations and Flicker  CE IEC 6100-4-2: 1995  ESD Air Discharge 8kV. Contact Discharge 4kV.  CE IEC 6100-4-3:1995  Radiated Immunity (80-1000Mhz), 3V/m 80% A.M. by 1kHz  CE IEC 6100-4-4:1995  EFT/B: Immunity to electrical fast transients 1kV Power  Leads, 0.5Kv Signals Leads  CE IEC 6100-4-5:1995  Immunity to conductive surges COM Mode; 2kV,  Dif. Mode 1kV  CE IEC 6100-4-6:1996  Conducted immunity (0.15-80 MHz) 3VRMS 80% A.M.  By 1kHz  CE IEC 6100-4-11:1994  Voltage Dips and Short Interruptions  V reduc &gt;95%, 30% &gt;95% Duration 0.5per, 25per, 250per</p>
<b>LEDs</b>	
<b>LEDs:</b>	<p>Two LEDs per port  Link /ACT : Turns on link , blinks on activity (green)  Link: Turns on link any speed (green)</p>
<b>LEDs location:</b>	LED is located on the PCB, visible via holes in the metal bracket holder
<b>Connectors:</b>	(2) SFP+ cage

## Order Information

P/N	Description	Notes
<b>PE210G2SPI9A-XR</b>	Dual Port SFP+ 10 Gigabit Ethernet PCI Express Server Adapter	X8 Gen2 , Based on Intel 82599ES, Low-profile, Support Direct Attached Copper cable, Support Silicom SFP+ approved transceiver. RoHS compliant
<b>PE210G2SPI9A-SR</b>	Dual Port Fiber (SR) 10 Gigabit Ethernet PCI Express Server Adapter	X8 Gen2, Based on Intel 82599ES, Low-profile, on board support for Fiber SR, RoHS compliant
<b>PE210G2SPI9A-LR</b>	Dual Port Fiber (LR) 10 Gigabit Ethernet PCI Express Server Adapter	X8 Gen2, Based on Intel 82599ES, Low-profile, on board support for Fiber LR, RoHS compliant
<b>PE210G2SPI9A-SRD</b>	Dual Port Fiber (SX/SR) 1/10 Gigabit Ethernet PCI Express Server Adapter	X8 Gen2, Based on Intel 82599ES, Low-profile, on board support for Fiber SX/SR, RoHS compliant
<b>PE210G2SPI9A-LRD</b>	Dual Port Fiber (SX/SR) 1/10 Gigabit Ethernet PCI Express Server Adapter	X8 Gen2, Based on Intel 82599ES, Low-profile, on board support for Fiber LX/LR, RoHS compliant

Model P/N -LP

-LP: Assemble Low Profile Metal Bracket

-E: PXE enable

\*Advanced features may required driver development. Specifications details the 82599ES chips capabilities

1V8