



PE31625G4i71L Server Adapter

Quad Port Fiber 25 Gigabit Ethernet PCI Express Server Adapter Intel® XXV710 Based


Product Description

Silicom's 25 Gigabit Ethernet PCI Express server adapters are designed for Servers and high-end appliances. The Silicom 25 Gigabit Ethernet PCI Express Server adapters offer simple integration into PCI Express Bifurcation 2x8 to 25Gigabit Networks. The performance is optimized so that system I/O is not the bottleneck in high-performance networking applications.



The Silicom 25 Gigabit Ethernet PCI Express server adapters are based on Intel XXV710 Ethernet controller with fully integrated 25 Gigabit Ethernet Media Access Control (MAC), and SFI Interface. In addition to managing MAC and PHY Ethernet layer functions, the controller manages PCI Express packet traffic across its transaction, link, and physical/logical layers. Using hardware acceleration, the controller offloads tasks from the host, such as TCP/UDP/IP checksum calculations and TCP segmentation.

Silicom's 25 Gigabit Ethernet PCI-Express Server adapters are the ideal solution for implementing multiple network segments, mission-critical high-powered networking applications and environments within high performance servers.

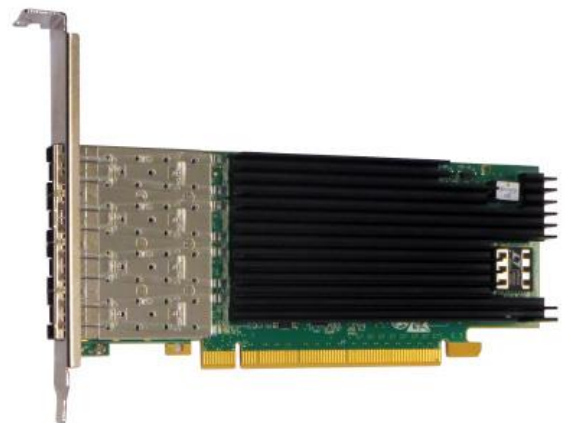

Key Features

SFP28 25Gigabit Ethernet:

25Gigabit Ethernet Adapter with SFP cage support:

- -ZS: Fiber 25 Gigabit Ethernet 25GBASE-SR:
 - 25GBase-SR with 25G 850nm Small Form Factor Pluggable (SFP28)
- -ZL: Fiber 25 Gigabit Ethernet 25GBASE-LR:
 - 25GBase-LR with 25G 1310nm Small Form Factor Pluggable (SFP28)
- -SR: Fiber 10 Gigabit Ethernet 10GBASE-SR:
 - 10GBASE-SR with 10Gigabit 850nm Small form Factor Pluggable (SFP+)
- -LR: Fiber 10 Gigabit Ethernet 10GBASE-LR:

- 10GBASE-LR with 10Gigabit 1310nm Small form Factor Pluggable (SFP+)

-ZS: Fiber 25 Gigabit Ethernet 25GBASE-SR:

- 25 Gigabit Fiber Ethernet port supports 25GBASE-SR (850nm LAN PHY)
- 25Gigabit 850nm Small form Factor Pluggable (SFP28)

-ZL: Fiber 25 Gigabit Ethernet 25GBASE-LR:

- 25 Gigabit Fiber Ethernet port supports 25GBASE-LR (1310nm LAN PHY)
- 25Gigabit 1310nm Small form Factor Pluggable (SFP28)

-SR: Fiber 10 Gigabit Ethernet 10GBASE-SR:

- 10 Gigabit Fiber Ethernet port supports 10GBASE-SR (850nm LAN PHY)
- 10Gigabit 850nm Small form Factor Pluggable (SFP+)

-LR: Fiber 10 Gigabit Ethernet 10GBASE-LR:

- 10 Gigabit Fiber Ethernet port supports 10GBASE-LR (1310nm LAN PHY)
- 10Gigabit 1310nm Small form Factor Pluggable (SFP+)

LAN and Virtualization Features:

- Unified Networking Providing a single wire for LAN and storage: NAS (SMB, NFS) and SAN (iSCSI, FCoE)
- Remote SAN boot with data path intelligent offload
- VEB (Virtual Ethernet Bridge) & Edge Virtual Bridging / 802.1Qbg
- VMDq for VMware Netqueue* and Microsoft DVMQ*
- SR-IOV (Single Root I/O Virtualization): up to 128 Virtual Functions
- iSCSI and PXE boot (legacy and UEFI)
- Support for standard and custom network headers
- Partially Programmable Pipeline and Advanced Traffic Steering
- Intel® Ethernet Flow Director – 8000 On-Die perfect match filters
- 1536 queues/Physical Function (PF), >64 RSS/PF and 256 VMDq/PF
- Data Center Bridging (DCB) up to 8 traffic classes

Host Interface:

- PCIe 2x8 (Bifurcation) lanes from/to host via gold fingers of edge card
- Support PCI Express Base Specification Revision 3.0, 8GT/s, 5GT/s or 2.5GT/s

Technical Specifications

SFP28 25Gigabit Ethernet Technical Specifications Adapters:	
SFP28 (Small Form Factor Pluggable) supports:	SFI interfaces supports 25GBase-R PCS and 25 Gigabit PMA in order to connect with SFP28 to 25GBase-SR
25GBase-SR SFP28: IEEE Standard / Network topology:	Fiber 25Gigabit Ethernet, 25GBASE-SR (850nM LAN PHY).
25GBase-SR SFP28: Data Transfer Rate :	25.78125Gbps
25GBase-LR SFP28: IEEE Standard / Network topology:	Fiber 25Gigabit Ethernet, 25GBASE-LR (1310nM LAN PHY)
25GBase-LR SFP28: Data Transfer Rate:	25.78125Gbps
25GBase-LR SFP28: Cables and Operating distance Up to:	Single-Mode: 10000m at 9um
-ZS: Fiber 25GBASE-SR Technical Specifications:	
Output Transmit Power (25G):	Minimum: -1.42 dBm
Optical Receive Sensitivity (25G):	Maximum: -5.98 dBm
Operating Systems Support	
Operating system support:	Windows Linux FreeBSD VMware
General Technical Specifications	
Interface Standard:	PCI-Express Base Specification Revision 3.0 (8 GTs)
Board Size:	Half height – Half Length add-in card: 165.15mm X 64.39mm (6.502"X 2.535")

PCI Express Card Type:	X16 Lane (PCIe bifurcation 2x8)
On Board Connector Voltage:	+12V +/-8%
PCI Connector:	Gold Finger: X16 Lane, PCIe bifurcation 2x8
Controllers:	Intel XXV710-AM2
Holder:	Metal Bracket
Power Consumption:	Chipset (without transceivers): Max 22.2W
Operating Temperature:	0°C – 45°C (32°F – 113°F)
Air Flow Requirements:	200 ft./min
Storage:	-40°C–65°C (-40°F–149°F)
Regulation:	Card shall meet CE, FCC Class B, ROHS requirements
LEDs	
LEDs:	<p>Each Port has 2 LEDs to indicate link status and speed.</p> <p>Link: Physical link Speed: Green stay on – physical link on with 25G Speed Yellow stay on – physical link on with 10G Speed Off – physical link off.</p> <p>Link /ACT: Logic Link/Activity, Green Green stay on – logic link up, no activity Green blinking – logic link up, activity Off – logic link off</p>
LEDs location:	LEDs are located on the PCB, visible by light guide in the metal bracket
Connectors:	Quad Port SFP28 / zSFP+ Cage

Order Information

P/N	Description	Notes
PE31625G4i71L-XR	Quad Port SFP28 25 Gigabit Ethernet PCI Express Server Adapter	X16 Gen3 , Low Profile, Based on Intel XXV710-AM2, Support Direct Attached Copper cable, Support Silicom SFP28 approved transceiver. RoHS compliant
PE31625G4i71L-ZS	Quad Port Fiber (SR) 25 Gigabit Ethernet PCI Express Server Adapter	X16 Gen3, Based on Intel XXV710-AM2, Low-profile, on board support for Fiber SR, RoHS compliant
PE31625G4i71L-ZL	Quad Port Fiber (LR) 25 Gigabit Ethernet PCI Express Server Adapter	X16 Gen3, Based on Intel XXV710-AM2, Low-profile, on board support for Fiber LR, RoHS compliant
PE31625G4i71L-SR	Quad Port Fiber (SR) 10 Gigabit Ethernet PCI Express Server Adapter	X16 Gen3, Based on Intel XXV710-AM2, Low-profile, on board support for Fiber SR, RoHS compliant
PE31625G4i71L-LR	Quad Port Fiber (LR) 10 Gigabit Ethernet PCI Express Server Adapter	X16 Gen3, Based on Intel XXV710-AM2, Low-profile, on board support for Fiber LR, RoHS compliant

Order information: Model P/N -LP /

-LP: Assemble Low Profile Metal Bracket

1V0