


SNR S2989G Series

L2 Managed Switches

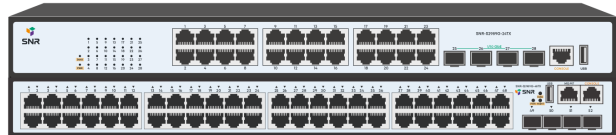

The S2989G series is a new generation of L2 access layer SNR switches with 1/10GE SFP+ Uplink-ports. Port capacity and functionality of S2989G series switches provides the ability to build Gigabit access level in enterprise networks and internet service providers networks.

Main features:

- 1/10GE SFP+ Uplink ports
- VSF HA stacking support
- Built-in surge protection on all copper ports
- The availability of models with redundant power supply (RPS/UPS)
- USB-port for connecting external drives
- Cisco-like CLI and standard SNR Private MIB
- Support for L2 redundancy protocols STP/RSTP/MSTP/ERPS(+CFM)/MRPP
- QinQ Port-based/Selective support
- IPv6/Dualstack IPv4/IPv6 support

Switch Models

The series switches are equipped with 1/10GE SFP + Uplink ports and 10/100/1000Base-T Downlink ports. This allows the S2989G series to be used for building «fair» gigabit access where the Uplink port bandwidth cannot be fully occupied by a single user with a gigabit tariff.

Model	10/100/1000Base-T	1/10GE SFP+
SNR-S2989G-8TX	8	4
SNR-S2989G-8TX-POE	8	4
SNR-S2989G-24TX	24	4
SNR-S2989G-24TX-POE	24	4
SNR-S2989G-24TX-RPS	24	4
SNR-S2989G-24TX-UPS	24	4
SNR-S2989G-48TX	48	4
SNR-S2989G-48TX-POE	48	4
SNR-S2989G-48TX-RPS	48	4
SNR-S2989G-48TX-DC	48	4

High performance

S2989G series switches are built with modern chipsets and have a non-blocking switching matrix that allows all switch ports to operate simultaneously at full speed, guaranteeing high performance and minimal network latency.

Model	Switching Capacity	Forwarding Rate	MAC
SNR-S2989G-8TX	96 Gbps	71,4 Mpps	16K
SNR-S2989G-8TX-POE	96 Gbps	71,4 Mpps	16K
SNR-S2989G-24TX	128 Gbps	95 Mpps	16K
SNR-S2989G-24TX-POE	128 Gbps	95 Mpps	16K
SNR-S2989G-24TX-RPS	128 Gbps	95 Mpps	16K
SNR-S2989G-24TX-UPS	128 Gbps	95 Mpps	16K
SNR-S2989G-48TX	176 Gbps	131 Mpps	16K
SNR-S2989G-48TX-POE	176 Gbps	131 Mpps	16K
SNR-S2989G-48TX-RPS	176 Gbps	131 Mpps	16K
SNR-S2989G-48TX-DC	176 Gbps	131 Mpps	16K

Resilience

For organizing resilient networks, support for standard protocols STP/RSTP/MSTP as well as ERPS (G.8032) including ERPS + CFM is implemented.

Link aggregation functionality using LACP or static aggregation allows combining up to 8 ports into one logical interface, increasing the bandwidth ability and resilience at the data link level.

Due to equipping each RJ-45 port with surge protection, the switch components are protected from damage when high voltage applied to the port.

Multicast management

Switches of the series have all the necessary functionality for multicast management on Layer 2: IGMP Snooping, MVR, IGMP packet filtering, and multicast traffic filtering. This allows arranging an efficient transporting of multicast-based services, such as IPTV.

Quality of Service (QoS)

Support for 8 hardware queues per port allows creating flexible service policies for different types of traffic, thus ensuring high quality of sensitive services under high load conditions. Traffic can be classified by field values in L2-L4 headers, including CoS, DSCP, VLAN ID, IP/MAC addresses, and TCP/UDP ports.

Model	Multicast Group	Queues per Port	ACL
SNR-S2989G (all series)	4096	8	512

Operational convenience

S2989G series SNR switches work under the control SNR system NOS (Networking Operating System) with the typical syntax CLI and SNMP MIB for all SNR switches. The system supports all the necessary functionality of the Enterprise/ISP level for building modern data networks and has extensive management and monitoring capabilities via CLI, Web and SNMP.

Security

The S2989G series switches provide a wide range of security features for both service providers and enterprise networks. Hardware Access Control Lists (ACLs) can filter traffic by L2-L4 header fields without performance brake. MAC-IP-Port binding functionality helps to protect the network from IP/MAC address spoofing by clients. Support for 802.1x and MAB protocols provides authentication of devices connected to the network.

Stacking Support

VSF protocol allows stacking multiple physical SNR S2989G switches into a single logical device, thereby simplifying configuration and increasing network reliability. Stacking is performed through standard 10GE ports and does not require the purchase of additional cards.

PoE+ support

The SNR-S2989G series switches support PoE 802.3af и PoE+ 802.3at standards with a smart capacity management. The PoE technology reduces cost of ownership and makes network maintenance easier. It allows to supply with power directly from switch different types of equipment such as WiFi hotspots, IP/Video phones, thin clients and others.

Model	Number of PoE ports	Total PoE capacity
SNR-S2989G-8TX-POE	8	125 Watt
SNR-S2989G-24TX-POE	24	370 Watt
SNR-S2989G-48TX-POE	48	740 Watt

Dimensions and power supply

The series includes both AC-only switches (SNR-S2989G-8TX, SNR-S2989G-24TX and SNR-S2989G-48TX) and redundant power supply models. For example, the SNR-S2989G-24TX-RPS and SNR-S2989G-24TX-RPS switches are equipped with an RPS-slot for DC 12V backup power supply, and SNR-S2989G-24TX-UPS has a built-in 12V battery discharge/charge controller with 5-20Ah capacity.

Model	Dimension	Power Consumption	Cooling	Power Supply
SNR-S2989G-8TX	266 x 44 x 161 mm	15 Watt	Passive	100-240AC
SNR-S2989G-8TX-POE	330 x 44 x 219 mm	150 Watt	Passive	100-240AC
SNR-S2989G-24TX	440 x 44 x 207 mm	30 Watt	Passive	100-240AC
SNR-S2989G-24TX R2.0	440 x 44 x 170 mm	30 Watt	Passive	100-240AC
SNR-S2989G-24TX-POE	440 x 44 x 300 mm	400 Watt	Active	100-240AC
SNR-S2989G-24TX-RPS	440 x 44 x 240 mm	30 Watt	Passive	100-240AC, 12V DC
SNR-S2989G-24TX-UPS	440 x 44 x 240 mm	30 Watt	Passive	100-240AC, 12V DC+ UPS
SNR-S2989G-48TX	440 x 44 x 280 mm	50 Watt	Active	100-240AC
SNR-S2989G-48TX-RPS	440 x 44 x 280 mm	50 Watt	Active	100-240AC, 12V DC
SNR-S2989G-48TX-POE	440 x 44 x 320 mm	790 Watt	Active	100-240AC
SNR-S2989G-48TX-DC	440 x 44 x 280 mm	50 Watt	Active	18-72V DC

Technical Brief:

Switching type

- Store-and-Forward

MAC address table

- 16K entries

Flow Control

- 802.3x Flow Control
- HOL

Jumbo frame

- 10 Kbytes

MAC address table features

- Limiting max number MAC addresses on a port, VLAN
- Static MAC addresses
- MAC-notification
- Disabling MAC address learning on a port, VLAN;
- Blackhole MAC

Flash memory size

- 64 Mbytes

RAM size

256 Mbytes

QinQ

- Port-Based / Selective QinQ

Ring Protection

- ERPS ITU-T G.8032
- ERPS + CFM
- MRPP
- Fast Link

Technical Characteristics:

Spanning Tree

- 802.1D STP/802.1W RSTP
- 802.1S MSTP (32 Instances)
- Root/BPDU Guard
- BPDU Tunnel

Loopback Detection

- Per-port/Per-MSTI
- Action shutdown/block

Port Aggregation

- LACP 802.3ad / 802.1ax
- Up to 64 groups per switch / up to 8 ports in group

Traffic Mirroring

- SPAN, RSPAN, ERSPAN
- 7 groups
- One-to-one / Many-to-one
- Flow-based (ACL)
- Remote VLAN
- Reflector Port

VLAN

- IEEE 802.1Q , 4094 VLAN
- Port-based VLAN
- Private VLAN
- Protocol VLAN
- Voice/MAC VLAN
- Multicast VLAN
- VLAN Trunking
- VLAN Translation
- GVRP

Multicast

- 4096 IGMP groups
- IGMP v1/v2/v3 snooping
- IGMP Fast leave
- IGMP Snooping Immediately Leave
- IGMP Snooping Querier
- Multicast VLAN Registration
- Multicast Src/Dst Control
- Limiting the maximum number of subscriptions
- Illegal source detection
- Multicast Policy
- Multicast Filter
- IGMP Snooping RADIUS Authentication
- MLD v1/v2 Snooping, MLD Snooping Immediately Leave
- MLD Snooping Querier

Security

- SSH v1/v2
- SSL v1/v2/v3
- MAC binding
- MAC filter
- Limiting the number of MAC addresses on a port
- Limiting Broadcast/Multicast/Unicast packets on a port by Kbps
- Access Management (IP-MAC-Port Binding)
- Port Security
- Port Isolation
- ARP Guard
- ARP Binding/ARP Limit

- Anti-ARP-Scan
- Dynamic ARP Inspection (DAI)
- RA Snooping/ND Snooping
- SAVI
- CPU protection
- IEEE 802.3az (Energy Efficient Ethernet)
- CE, RoHS, CB, cUL, LVD

IPv6

- ICMPv6; ND

QoS

- 8 queues per port
- Strict Priority, WDRR, Strict+WDRR
- Bandwidth Control
- Flow Redirect
- Traffic classification per port, ACL (L2-L4), VLAN ID, CoS, ToS, DSCP, IPv6 Flow Label
- Per port/VLAN policing
- Remarking DSCP, CoS/802.1p, Precedence, ToS

DHCP

- IPv4/IPv6 DHCP Client/Relay
- Option 82, Option 37/38
- IPv4/IPv6 DHCP Snooping/Server
- DHCP User Control

Management and monitoring

- RADIUS, TACACS+
- 802.1x (host/port based access control, Dynamic VLAN, Guest VLAN, Auto VLAN)
- MAC Authentication Bypass
- Up to 15 levels of user privileges
- Passing privilege levels via RADIUS/TACACS+
- Xmodem/TFTP/FTP, CLI, Telnet, Console
- Web/SSL, SSH (IPv4/IPv6)
- SNMPv1/v2c/v3, SNMP Traps, Public & Private MIB interface
- RMON 1,2,3,9
- Bootp/DHCP Client
- Autoprovisioning
- SNTP/NTP (IPv4/IPv6)
- PPPoE Intermediate agent
- Debug commands
- Password recovery
- Password encryption
- Backup and restore settings
- Ping, Traceroute
- Syslog (IPv4/IPv6)
- Dual IMG
- Multiple Configuration Files
- Port/CPU Mirror, RSPAN, ERSPAN
- OAM, Dying Gasp, VCT, DDM
- Multiple IP Interface
- ULDP (like Cisco UDLD), LLDP/LLDP MED
- Management of Indication
- Virtual Cabel Test (VCT)

ACL

- 512 ACL
- Per port/VLAN
- Filtering based on: switch port, VLAN ID, 802.1p priority, MAC address, EtherType, IPv4 / IPv6 address, IPv6 traffic class, IPv6 flow label, ToS, DSCP, protocol type, TCP / UDP port number, CPU Interface Filtering
- Time Range ACL
- Userdefined ACL
- ACL statistics

IPv6

- ICMPv6
- NDP
- SNMP over IPv6
- HTTP over IPv6
- IPv6 ping/traceroute
- IPv6 Telnet
- IPv6 Syslog
- RFC1981 Path MTU Discovery
- RFC2460 IPv6
- RFC2461 4861 Neighbor Discovery
- RFC2462,4862 IPv6 Stateless Address Auto-configuration
- RFC2464 IPv6 Neighbor over Ethernet and definition
- RFC3515, 4291 IP Version 6 Addressing Architecture
- RFC2893, 4213 IPv4/IPv6 Dual-stack
- IPv6 Ready Logo Phase 2

Stacking

- Stacking via SFP+
- Stack link bandwidth up to 40Gbps
- Up to 4 switches in a stack

Logging

- RAM logging
- Flash logging
- Logging to Syslog server
- Configuring the logging level
- Logging executed command

USB Support

- USB 2.0 port

Cooling system

- Passive on 24-port models, active on 48-port models

Humidity

- 5%-95%, no condensation

Operating temperature

- 0C ~ 50C

Storage temperature

- -40C ~ 70C

Surge protection

- Up to 4 kV

MBTF

- >800000 hours

Ordering information

Model	Description
SNR-S2989G-8TX	L2 Managed Switch, 8 ports 100/1000Base-T RJ-45, 4 ports 1/10GE SFP+. Power: 100-240AC.
SNR-S2989G-8TX-POE	L2 Managed Switch, 8 ports 100/1000Base-T RJ-45, 4 ports 1/10GE SFP+. Power: 100-240AC. POE 125W
SNR-S2989G-24TX	L2 Managed Switch, 24 ports 100/1000Base-T RJ-45, 4 ports 1/10GE SFP+. Power: 100-240AC.
SNR-S2989G-24TX-POE	L2 Managed Switch, 24 ports 100/1000Base-T RJ-45, 4 ports 1/10GE SFP+. Power: 100-240AC. POE 370W
SNR-S2989G-24TX-RPS	L2 Managed Switch, 24 ports 100/1000Base-T RJ-45, 4 ports 1/10GE SFP+. Power: 100-240AC, 12V DC RPS.
SNR-S2989G-24TX-UPS	L2 Managed Switch, 24 ports 100/1000Base-T RJ-45, 4 ports 1/10GE SFP+. Power: 100-240AC, 12V battery connector
SNR-S2989G-48TX	L2 Managed Switch, 48 ports 10/100/1000Base-T RJ-45, 4 ports 1/10GE SFP+. Power: 100-240AC.
SNR-S2989G-48TX-RPS	L2 Managed Switch, 48 ports 10/100/1000Base-T RJ-45, 4 ports 1/10GE SFP+. Power: 100-240AC, 12V DC RPS.
SNR-S2989G-48TX-DC	L2 Managed Switch, 48 ports 100/1000Base-T RJ-45, 4 ports 1/10GE SFP+. Power: 18-72V DC.
SNR-S2989G-48TX-POE	L2 Managed Switch, 48 ports 100/1000Base-T RJ-45, 4 ports 1/10GE SFP+. Power: 100-240AC. POE 740W

NAG LLC

Office M-03, Al Garhoud Business center Building, UAE, Dubai

Website: snr.global

Tel: +971 0 42599967

Technical

e-mail: sales@snr.global

support portal: snr.support