



Overview

The DL2000 is optimized for efficiency, density and flexibility and a server node can be serviced individually without impacting the operation of other server nodes sharing the same chassis. The DL2000 consists of up to 4 independent DL170e G6 servers in the 2U HP ProLiant e2000 G6 Chassis. The servers share power supplies and fans, providing greater power and cooling efficiencies.

The DL2000 was designed to double the density to maximize data center floor space, increase performance while lowering energy consumption and provide flexible configurations that fit into existing industry standard racks.

Each DL170e G6 server node supports up to two Intel® two processors and 16 DDR3 DIMM sockets. The DL170e G6 provides all of the features expected in an enterprise server, including essential management features (LO100i) and Easy Setup for rapid deployment, but at a low cost.

4 Node 24 SFF HDD Model Illustrated

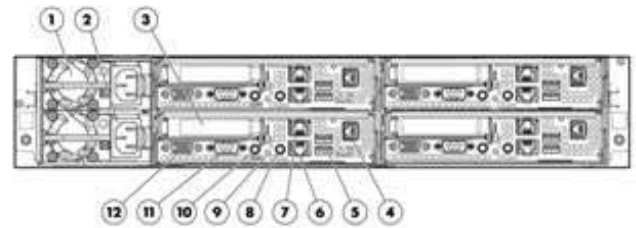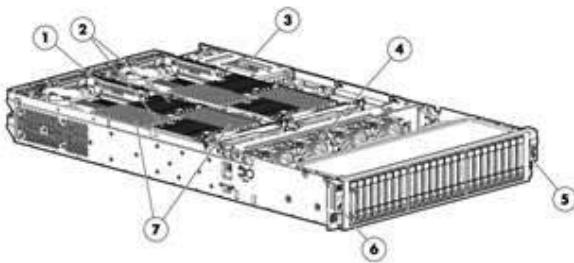

Front View:

1. 1U Node PCIe Riser - Low Profile PCIe x16 Gen2 Slot
2. Intel® Xeon® 5500 or 5600 series processors (supports up to two per node)
3. Common Slot Power Supply (two supported per chassis)
4. 4 x 80mm system fans
5. Standard Right Power Buttons, Chassis UID, Health LEDs
6. Standard Left Power Buttons, Health LEDs
7. 16 DDR3 DIMM slots

Rear View:

1. Common Slot Power Supply
2. Power supply cable socket
3. Low-Profile PCI Express x16 Gen2 slot
4. Optional dedicated management port (RJ-45)
5. Two USB ports
6. One GbE LAN port (RJ-45)
7. One GbE LAN port with shared management (RJ-45)
8. Power Button
9. Health LED
10. UID Button
11. Serial Port
12. Video Port

What's New

- Support for new options

Standard Features

NOTE: For the Standard Features shipped in the Factory Integrated Models, please see the "Configuration Information - Factory Integrated Models" section.

Processor

One of the following depending on Model

Six-Core Processors

Intel® Xeon® X5675 (3.06GHz/6-core/12MB/95W, DDR3-1333, HT, Turbo 2/2/2/2/3/3) Processor

Intel® Xeon® X5660 (2.80GHz/6-core/12MB/95W, DDR3-1333, HT, Turbo 2/2/2/2/3/3) Processor

Intel® Xeon® X5650 (2.66GHz/6-core/12MB/95W, DDR3-1333, HT, Turbo 2/2/2/2/3/3) Processor

Intel® Xeon® E5649 (2.53GHz/6-core/12MB/80W, DDR3-1333, HT, Turbo 2/2/2/2/3/3) Processor

Intel® Xeon® E5645 (2.40GHz/6-core/12MB/80W, DDR3-1333, HT, Turbo 2/2/2/2/3/3) Processor

Intel® Xeon® L5640 (2.26GHz/6-core/12MB/60W, DDR3-1333, HT, Turbo 2/2/3/3/4/4) Processor

Four-Core Processors

Intel® Xeon® E5620 (2.40GHz/4-core/12MB/80W, DDR3-1066, HT, Turbo 1/1/2/2) Processor

Intel® Xeon® L5630 (2.13GHz/4-core/12MB/40W, DDR3-1066, HT, Turbo 1/1/2/2) Processor

Intel® Xeon® E5607 (2.26GHz/4-core/8MB/80W, DDR3-1066) Processor

Intel® Xeon® E5603 (1.60GHz/4-core/4MB/80W, DDR3-1066) Processor

NOTE: HT indicates that the processor model supports Intel® Hyper-Threading Technology

NOTE: Turbo indicates the maximum potential frequency increment when using Intel® Turbo Boost Technology, with 6, 5, 4, 3, 2, and 1 cores active.

NOTE: DDR3 speed is the maximum memory speed of the processor. Actual memory speed may depend on the quantity and type of DIMMs installed.

NOTE: For the Intel 5000 Series, the letter preceding the model number indicates the performance/wattage of the processor. "X" denotes High Performance/Wattage; "E" denotes Enterprise Performance/Wattage (Mainstream), and "L" denotes Lower Wattage.

NOTE: Up to 2 processors supported. Mixing different processor models is not supported.

Cache Memory

12MB (1 x 12MB) Level 3 cache

NOTE: All 5600 processor models except those noted below.

8MB (1 x 8MB) Level 3 cache

NOTE: For processor E5607.

6MB (1 x 6MB) Level 3 cache

NOTE: For processor E5603.

Chipset

Intel® 5520 Chipset

NOTE: For more information regarding Intel chipsets, please see the following URL:

<http://www.intel.com/products/server/chipsets/>

Upgradeability

Upgradeable to two processors (12 cores)

Memory Protection

Advanced ECC (multi-bit error protection)

Mirroring mode

Lockstep mode

Standard Features

Memory

Type	DDR3 Registered (RDIMM) and Unbuffered (UDIMM)
Maximum (RDIMM) (per server node)	192GB (12 x 16GB) PC3-8500R (DDR3-800)
Maximum (UDIMM) (per server node)	48GB (12 x 4GB) PC3-10600E (DDR3-1333)

NOTE: Depending on the memory configuration and processor model, the memory speed may run at 1333MHz, 1066MHz, or 800MHz. Please see the Online Memory Configuration Tool at <http://www.hp.com/go/ddr3memory-configurator>

Network Controller

HP NC362i Integrated Dual Port Gigabit Server Adapter

Expansion Slots

- Half Height Nodes (1U): One available PCI Express Gen 2.0 slots:
 - Slot 1: Low profile PCI-Express 2.0 x16
- Full Height Nodes (2U): three available riser options
 - Option 1: Up to three available PCI-Express Gen 2.0 slots:
 - Slot 1: full-height/full-length PCI-Express 2.0 x16
 - Slot 2: full-height/half-length PCI-Express 2.0 x4
 - Slot 3: low-profile PCI-Express 2.0 x4
 - Option 2: Up to three available PCI-Express Gen 2.0 slots:
 - Slot 1: full-height/full-length PCI-Express 2.0 x8
 - Slot 2: full-height/half-length PCI-Express 2.0 x8
 - Slot 3: low-profile PCI-Express 2.0 x8
 - Option 3: Up to two available PCI-Express Gen 2.0 slots:
 - Slot 1: full-height/full-length PCI-Express 2.0 x16
 - Slot 3: low-profile PCI-Express 2.0 x8

Full-height PCIe Riser Option

Expansion Slots #	Technology	Bus Width**	Connector Width*	Bus Number	Form Factor	Notes
1	PCI-Express 2.0	x16	x16	4	Full height, full length	3.3 volts
2	PCI-Express 2.0	x4	x4	6	Full height, half length	3.3 volts
3	PCI-Express 2.0	x4	x4	7	Low Profile	3.3 volts

Full-height PCIe Riser Option

Expansion Slots #	Technology	Bus Width**	Connector Width*	Bus Number	Form Factor	Notes
1	PCI-Express 2.0	x8	x8	4	Full height, full length	3.3 volts
2	PCI-Express 2.0	x8	x8	5	Full height, half length	3.3 volts
3	PCI-Express 2.0	x8	x8	7	Low Profile	3.3 volts

Full-height PCIe Riser Option

Expansion Slots #	Technology	Bus Width**	Connector Width*	Bus Number	Form Factor	Notes
1	PCI-Express 2.0	x16	x16	4	Full height, full length	3.3 volts

Standard Features

	Expansion Slots #	Technology	Bus Width**	Connector Width*	Bus Number	Form Factor	Notes
	3	PCI-Express 2.0	x8	x8	6	Low Profile	3.3 volts
Half-height PCIe Riser (Standard with half-height 1U nodes)	1	PCI-Express 2.0	x16	x16	4	Low Profile	3.3 volts

* Default bus assignment. Inserting cards with PCI bridges may alter the actual bus assignment number.

** Indicates the number of physical electrical lanes running to the connector.

Storage Controller

Non-Hot Plug SATA Models	<p>Embedded HP Smart Array Hot Plug Advanced Pack for B110i (RAID 0, 1, 10)</p> <p>NOTE: Transfer rate: up to 3 Gb/s SATA</p> <p>NOTE: To enable RAID on Embedded SATA (Windows and Linux only), use the HP Smart Array B110i SATA Raid controller, To enable use of the B110i, enter the ROM based setup utility(RBSU). The option for enabling RAID can be found in the advanced section of the RBSU. For additional details www.hp.com/go/SATARAID. For RAID on Solaris, a Smart Array Controller must be purchased.</p>
Hot Plug SATA Models	<p>Embedded HP Smart Array Hot Plug Advanced Pack for B110i (RAID 0, 1, 10)</p> <p>NOTE: Transfer rate: up to 3Gb/s SATA</p> <p>NOTE: The HP Smart Array B110i SATA Raid Hot Plug Advance Pack provides the hot-plug and RAID support for the embedded SATA controller. The Hot Plug Advance kit is a License to enable the RAID support on Hot Plug models. It supports up to six 3G SATA hard disk drives. It will support a maximum of two (2) logical drives. It supports Raid 0, 1 and 1+0. For additional details www.hp.com/go/SATARAID</p>
Hot Plug SAS/SATA Models	<p>HP Smart Array Controller RAID 0,1,10, 5</p> <p>NOTE: Transfer rate: up to 6GB/s SAS, 3Gb/s SATA</p> <p>NOTE: SAS Upgrade: A HP Smart Array Controller is required for SAS HDD support. Transfer rate: 6.0 Gb/s SAS supported.</p> <p>NOTE: If a Smart Array P410 Controller is added after initial purchase (e.g. an upgrade) a HP DL170e G6 P410 CONTROLLER CABLE OPTION KIT (P/N 612206-B21) must be ordered to connect the Smart Array Controller to the adapter board.</p> <p>NOTE: If any Smart Array Controller other than the P410 is added after initial purchase (e.g. an upgrade), an HP DL170e G6 SMART ARRAY CONTROLLER CABLE OPTION KIT (P/N 612207-B21) must be ordered to connect the Smart Array Controller to the adapter board.</p> <p>NOTE: An external diskette drive, USB floppy drive key or virtual FDD using LO100 Advanced Pack is needed to install storage controller drivers during a Windows operating system installation from a CD.</p>

Standard Features

Internal Storage Devices	Diskette Drives	Via USB only
	Optical Drives	DVD drive via USB only (External support only)
	Hard Drives	None ship standard
	Drive Bays	Up to 8 or 12 Hot plug SAS/SATA 3.5" drives
	One of the following depending on Model	Up to 16 or 24 Hot plug SAS/SATA 2.5" drives

NOTE: The 12 LFF HDD cage is available for special large volume configurations only. Please contact your HP representative for details.

Maximum Internal Storage	LFF 3.5" Hot Plug SATA	24.0TB	8 x 3TB *
	LFF 3.5" Hot Plug SAS	24.0TB	8 x 3TB
	LFF 3.5" Hot Plug SATA	36.0TB	12 x 3TB *
	LFF 3.5" Hot Plug SAS	36.0TB	12 x 3TB
	SFF 2.5" Hot Plug SATA	16.0TB	16 x 1TB
	SFF 2.5" Hot Plug SAS	16.0TB	16 x 1TB
	SFF 2.5" Hot Plug SATA	24.0TB	24 x 1TB
	SFF 2.5" Hot Plug SAS	24.0TB	24 x 1TB

NOTE: The 12 LFF HDD cage is available for special large volume configurations only. Please contact your HP representative for details.

NOTE: To support HP hard drives exceeding 2.2 TB, a HP Smart Array Controller is required.

Interfaces	Serial	1
	Network RJ-45 (Ethernet)	2 10/100/1000 NIC ports (1 NIC shared for the HP ProLiant Lights Out 100i Remote Management)
	Graphics	1
	Management	1 Optional Dedicated LO100i Management Port
	Health LED	2 (1 front and 1 rear) per server node
	Power	2 (1 front and 1 rear) per server node
	UID	1 rear per server node and 1 upfront system UID
	USB	3 (two rear, one internal)

Industry Standard Compliance	ACPI V2.0 Compliant
	PCI 2.2 Compliant
	PXE Support
	WOL Support
	Microsoft® Logo certifications
	IPMI 2.0, DCMI 1.0. SMASH CLP compliant

Standard Features

Graphics

Integrated Matrox Graphics G200e, 32MB Standard

- 16 bit color: maximum resolution of 1600 x 1200
- 32 bit color: maximum resolution of 1280 x 1024

The following NVIDIA graphics cards are tested for compatibility in the DL2000 (when using full-height 2U nodes):

- NVIDIA Quadro 6000 6GB PCIe x 16 graphics card
- NVIDIA Quadro FX5800 4GB PCIe x 16 graphics card
- NVIDIA Quadro 4000 2GB PCIe x 16 graphics card
- NVIDIA Quadro FX3800 1GB PCIe x 16 graphics card

NOTE: For more information on the latest visualization and acceleration qualification status, please see <http://www.hp.com/go/accelerators>

NOTE: An HP DL170e GPU Adapter Kit (P/N 612253-B21) is required when installing this NVIDIA card. The NVIDIA cards can only be installed in the 2U node with the 2 slot full-height riser option: HP DL170e I/O Riser PCIe x16 x8 FIO option (P/N 512481-B21).

Server Power Cords

One 6' Highline (IEC-IEC) power cord ships standard

NOTE: HP ProLiant DL servers are primarily connected to PDU's in data center racks so they ship standard with only a PDU power cord (416151-B21).

NOTE: If customers require a power cord, they can check the power cord matrix for the appropriate cord. Please see the following power cord matrix: <http://www.hp.com/go/powercordmatrix>

Advanced Power Management: Power Management Controller

In addition to the efficiencies gained by the shared power infrastructure, the DL2000 contains advanced power metering and capping capabilities. The embedded Power Management Controller (PMC) is able to monitor power consumption and throttle the speed of the processors and memory in each node within the chassis in order to maintain a pre-set power budget. HP provides a simple command-line utility, called HP ProLiant Power Interface Control (PPIC) Utility, for reading and configuring the power control logic of the server nodes. Versions are available for MS Windows Server OS (2008 and 2008 R2) and Linux OS (RHEL5 and SLES11) with the requirement that the OS IPMI Driver be installed. The following Power Management modes for power redundancy are standard and are configurable in the controller:

- No Redundancy - power control disabled. No power throttling will occur.
- (DEFAULT) AC Redundancy with Throttling. This mode allows all nodes to share both power supplies and run at maximum performance. Power control logic will only throttle the performance of each node when the power draw by the chassis attempts to exceed the load supported by the power supplies. In this mode, the box is expected to survive an unexpected AC Power loss to one of the power supplies.
- Full AC/DC Redundancy - power control logic will maintain a power cap value for the chassis at the DC rating of a single power supply (750W, or 1200W), such that if one power supply experiences a DC or AC failure, the chassis should remain on-line and operational.

Power Capping is included with the L0100 Advanced Pack:

- Power Capping - User specifies the power envelope for the 2U chassis, within the capabilities of the hardware installed. Users run a utility to calibrate the minimum and maximum power consumption envelope for the chassis. In order to avoid any impact to performance due to throttling, a User selectable Power Cap value should not be set below the minimum power value provided by the

Standard Features

utility.

Power Supply

HP has a new design for ProLiant power supplies - the new Common Slot power supply bay. This design provides the customer with commonality in power supplies across multiple platforms to save on the cost of spares and allows HP to offer multiple power solutions to fit the customers' needs. Many HP ProLiant Servers come with high-efficiency Common Slot power supplies. The new HP Common Slot power supplies are designed for the highest power efficiency without degrading performance of the ProLiant server. These power supplies have efficiency ratings up to 94%. There are multiple power supply options available allowing you to "right-size" the most appropriate power supply for your server configuration. To make sure you select the correct power supply to meet your configuration, please use the HP Power Advisor at: www.hp.com/go/hppoweradvisor. All HP Common Slot power sources are UL, CE mark compliant, hot-plug, and support Redundant Power Management: In addition to the shared power and cooling infrastructure, the DL2000 contains advanced power metering and power capping technologies. The Power Interface Controller allows you to configure the system for full AC redundancy or AC redundancy with power throttling, depending on your configuration. With the optional Dynamic Power Capping mode, the DL2000 can boost the capacity of your data center by reclaiming trapped power and cooling capacity.

HP offers several Common Slot Power Supply Options for this platform.

NOTE: The 80 PLUS program is a unique forum that unites electric utilities, the computer industry, and consumers in an effort to bring energy efficient technology solutions to the marketplace. 80 Plus independently tests power supply efficiency and publicly posts the results on 80Plus.org. Optional power supplies can be purchased through power supply option kits (see Power Supply Options for part numbers).

NOTE: Mixing of power supplies in the same chassis is not supported. All power supplies must be of the same type, all 750W 94%, all 1200W 94%, or all 1200W 90%. If non-matched power supplies are inserted you will get errors and operation will fail.

System Fans

4 x 80mm system fans ship standard; Non-hot plug, Non-redundant.

Required Cabling

For required cabling information, refer to the HP Web site at: www.hp.com/servers/dl170e.

Operating Systems and Virtualization Software Support for ProLiant Servers

[Microsoft Windows Server](#)
[Red Hat Enterprise Linux \(RHEL\)](#)
[SUSE Linux Enterprise Server \(SLES\)](#)
[Oracle Solaris](#)
[VMware ESX](#)
[Citrix XenServer](#)

NOTE: For more information on HP's Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your server including how to purchase from HP, please visit our OS Support Matrix Site at: <http://www.hp.com/go/ossupport>

Standard Features

Form Factor

HP ProLiant e2000 G6 Chassis - 2U Chassis can support up to four DL170e server nodes in the 2U chassis.
HP ProLiant DL170e G6 Server - Half-width system board. Half-height (1U) or full-height (2U) depending on riser option selected.

HP offers four different drive cages for the 2U HP ProLiant e2000 G6 Chassis

- 8 LFF HDD Cage
- 12 LFF HDD Cage
- **NOTE:** Available for special large volume configurations only. Contact HP representative)
- 16 SFF HDD Cage
- 24 SFF HDD Cage


The 2U chassis can support two server node configurations:

- Two full height nodes
- Four half-height nodes

Server Node Blanks

If a server node is removed for a period, a blank must be installed to maintain the thermal environment in the chassis. It is okay to leave a node in the chassis powered off to be serviced in the future. But once a DL170e node is removed for servicing, a HP DL2000 Server Node Blank Kit is required. The blank is a 1U blank so two blanks are needed for a 2U node.

4 Node Configuration - Front View

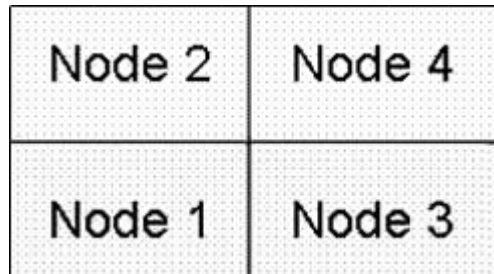

NOTE: For 2 node configurations, 2U nodes are ordered and are numbered 1 and 3. **NOTE:** Additional nodes cannot be added later to 2 node configurations.

Embedded Manageability HP ProLiant Lights-Out 100 HP Lights-Out 100 with Optional LO100 Advanced Licenses for Virtual KVM and Virtual Media.

Standard Features:

- IPMI 2.0, DCMI 1.0, and SMASH CLP support
- Configuration via ROM Setup Utility or LO100cfg utility
- USB 2.0 support for virtual media for much faster transfer speeds
- Enhanced browser interface and embedded KVM over IP provides OS-independent remote graphical console
- 24x7 Technical Support and Update (TSU) 1 year support and license upgrades included in Advanced license

For more information, see: www.hp.com/go/lo100.

Standard Features

Security

- Power-on password
- Setup password
- Diskette boot control
- Secure Sockets Layer (SSL)
- Secure Shell (SSH)

Warranty

This product is covered by a global limited warranty and supported by HP Services and a worldwide network of HP Authorized Channel Partners. Hardware diagnostic support and repair is available for one year from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HP Care Pack services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

NOTE: Server Warranty includes 1 year Parts, 1 year Labor, 1-year on-site support with next business day response. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have HP replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at:

<http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html>.

Optional Features

HP Insight management HP Insight Control

HP Insight Control, a product option, delivers essential infrastructure management that can help save time and money by making it easy to deploy, migrate, monitor, remote control, and optimize your IT infrastructure through a single, simple management console. For more information, see <http://www.hp.com/go/insightcontrol>.

HP Insight Control includes one year of 24 x 7 HP Software Technical Support and Update Service ensuring rapid access to HP support staff and proactive delivery of software updates. For more information about this service, see: <http://www.hp.com/services/insight>.

HP Insight Control server deployment

HP Insight Control server deployment is a deployment solution for HP ProLiant and Integrity servers hosted on a Windows CMS. It automates the process of deploying and provisioning server software, enabling companies to quickly and easily adapt to changing business demands. Insight Control server deployment includes software optimizations for HP servers, including the HP scripting toolkits, configuration jobs for leading industry-standard operating systems, sample unattended files, and HP server support packs that include software drivers, management agents, and important documentation. Deploying servers can be accomplished either through imaging or through scripting.

Insight Control server deployment is hosted on a Windows server and is intended for heterogeneous environments deploying Windows, Linux, VMware ESX and Microsoft Hyper-V systems.

Insight Control server deployment includes one year of 24 x 7 HP Software Technical Support and Update Service ensuring rapid access to HP support staff and proactive delivery of software updates. For more information about this service, please visit: <http://www.hp.com/services/insight>.

Core Server Management ProLiant 100 Series G6 Core Management Software for ProLiant 100 Series Servers

HP provides management solutions that are designed to simplify a server's installation, configuration, and maintenance throughout the entire server lifecycle. This provides the customers with higher levels of operational efficiency and highly reliable systems.

While ProLiant 100 series G6 servers do not support the Insight Foundation Suite for ProLiant, they support a key subset of this important suite software tools and utilities which are very suitable for this class of server: SIM, SMH, agents, providers, and a SmartStart 'like' deployment capability called Easy Set-up which greatly simplifies server set-up. Additionally the DL100 and SL100 G6 models support the SmartStart Scripting Toolkit (SSSTK), an automated scalable deployment utility.

Information on core management supported on ProLiant 100 series G6 servers can be found at these URLs:

- Core Management: www.hp.com/go/coremanagement
- HP ProLiant 100 series Easy Set-up: www.hp.com/servers/easyssetup

Optional Features

Core Infrastructure Management

HP Systems Insight Manager

HP Systems Insight Manager (HP SIM) provides a unified, secure and extensible standards-based environment to centrally manage servers, storage and other infrastructure devices, (both HP and non-HP) across multiple operating system platforms.

Insight Management Agents

HP Insight Management Agents and Insight Management Providers are available for HP Systems Insight Manager (SIM) Integration.

ProLiant 100-series G6 servers can use the same SNMP based Insight Management Agents supported by other ProLiant servers. As a result, administrators can use HP Systems Insight Manager (SIM) 5.3 and greater to manage ProLiant 100-series G6 servers. Administrators can also use any other SNMP-based management tool. These agents are obtained as part of the ProLiant 100-series model-specific "Easy Set-up" CDs, or through <http://www.hp.com/servers/easysetup>

The following capabilities are enabled on the 100-series G6 servers by the SNMP agents:

- Health monitoring capabilities, including monitoring for drives, fans, network, power supplies, and temperature
- Alerting capabilities, including basic alert notification for Smart Array drive pre-failure only
- Performance monitoring capabilities providing information on processor, memory, disk free space, network utilization

For additional information, please see: <http://www.hp.com/go/insight>

Easy Set-up

Easy Set-up is available for this platform as an ISO image web download. HP ProLiant Easy Set-up provides easy, step-by-step, single and multi-server server utilities to streamline server setup. The user experience is consistent with SmartStart and offers the following capabilities:

- Boot environment and GUI
- Assisted Installation: Windows 2003 Server and Windows 2008 Server drivers
- Manual installation: Windows 2003 Server, Windows 2008 Server, and Linux drivers (specific OS support varies by server. Refer to each server's QuickSpecs for supported versions)
- HP Insight Diagnostics
- AutoRun
- Array Configuration Utility (ACU) has been combined with Array Diagnostics Utility (ADU) to offer both configuration of array controllers and storage devices and testing of array controller hardware
- SmartStart Scripting Toolkit (SSSTK) and Smart Components for software and drivers

NOTE: OS and SW available for Manual Installation are listed on each servers' QuickSpecs.

SmartStart Scripting Toolkit (SSSTK)

The SmartStart Scripting Toolkit is a server deployment product that delivers an unattended automated installation for high-volume server deployments.

Optional Features

The SmartStart Scripting Toolkit includes a set of utilities for configuring and deploying servers in a customized, predictable, and unattended manner. These utilities enable you to duplicate the configuration of a source server on target servers with minimum user interaction.

The Toolkit is designed for IT experts with experience in scripting operating system installations and configuring ProLiant server hardware.

For additional information, please see:

<http://h18004.www1.hp.com/products/servers/management/toolkit/index.html>

Subscriber's Choice

Subscriber's Choice Driver and Support Alerts/Notifications is a web-based email subscription service that provides software and driver change notifications for ProLiant products. Sign up at: <http://www.hp.com/go/subscriberschoice> and customize your profile to receive various new alerts as they become available, on a weekly or monthly basis.

ROMPaq, software and latest drivers

The latest software, drivers, and firmware fully optimized and tested for your ProLiant server and options; downloaded from Software and Drivers download pages website at: <http://www.hp.com/go/support> and from www.hp.com/servers/easysetup. Contains the following:

- HP Insight Management Agents for Systems Insight Manager (SIM) Integration
- HP Systems Management Homepage
- Array Configuration Utility (ACU)
- Array Diagnostics Utility (ADU)
- HP Insight Diagnostics

High Performance Clusters

HP Cluster Platforms

HP Cluster Platforms are specifically engineered, factory-integrated large-scale ProLiant clusters optimized for High Performance Computing, with a choice of servers, networks and software. Operating system options include specially priced offerings for Red Hat Enterprise Linux and Novell SLES, as well as Microsoft Windows HPC Server. A Cluster Platform Configurator simplifies ordering. <http://www.hp.com/go/clusters>

HP HPC Interconnects

High Performance Computing (HPC) interconnect technologies are available for this server as part of the HP Cluster Platform portfolio. These high-speed InfiniBand and Gigabit interconnects are fully supported by HP when integrated within an HP cluster. Flexible, validated solutions can be defined with the help of configuration tools. <http://www.hp.com/techservers/clusters/ucp/index.html>

HP Cluster Management Utility

HP Cluster Management Utility (CMU) is an HP-licensed and HP-supported suite of tools that are used to manage large-scale Linux ProLiant systems. CMU includes software for the centralized provisioning, management and monitoring of nodes. CMU makes the administration of clusters user friendly, efficient, and effective. <http://www.hp.com/go/cmuh>

Optional Features

Storage Software

Whether you need to solve a specific data protection, archiving, or storage command and control challenge, or deliver on strategic consolidation, compliance, or continuity initiatives, look no further than HP storage software. Our storage software helps you reduce costs, simplify storage infrastructure, protect vital assets and respond faster to business opportunities.

Storage software that gets the job done:

- **Data Protection and Recovery Software**

Whether you're a large enterprise or a smaller business, HP data protection and recovery software will cost-effectively protect you against disaster and ensure business continuity.

- **Data Archive and Migration Software**

HP's storage software enables you to comply with data retention and retrieval requirements, improve application performance, and reduce costs by efficiently migrating infrequently accessed or less valuable data to lower cost storage.

- **Storage Resource Management Software (SRM)**

HP's storage resource management software reduces operational costs and provides the command and control foundation you need to efficiently manage and visualize your physical and virtual environments.

- **Data Replication Software**

HP offers array-based and host-based replication software for use in disaster recovery, testing, application development and reporting.

- **Storage Device Management Software**

Maximize your investment in HP storage and networking with software that enables hardware-specific configuration, performance tuning and connectivity management.

- **HP StoreVirtual VSA**

With HP StoreVirtual VSA you can use the power of virtualization to turn a set of heterogeneous and disconnected physical disk drives in your servers and storage devices into a single pool of logical storage capacity.

NOTE: For more information available Storage Software including QuickSpecs, please see: www.hp.com/go/storage/software.

Factory Express Portfolio for Servers and Storage

HP Factory Express offers configuration, customization, integration and deployment services for HP servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.

Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. HP products supported through Factory Express include a wide array of servers and storage: HP Integrity, HP ProLiant, HP ProLiant Server Blades, HP BladeSystem, HP 9000 servers as well as the MSAxxxx, VA7xxx, EVA, XP, rackable tape libraries and configurable network switches.

For more information on Factory Express services for your specific server model please contact your sales representative or go to: <http://www.hp.com/go/factory-express>.

Optional Features

HP Simple Configurator

SCE is a guided self service tool to help sales and non technical people provide customers with initial configurations in 3 to 5 minutes. You may then send the configuration on for configuration help, or use in your existing ordering processes. If you require "custom" rack configuration or configuration for products not available in SCE, please contact HP's Customer Business Center or an Authorized Partner for assistance. <http://www.hp.com/products/configurator>

Service and Support

Service and Support

HP Technology Services for Industry Standard Servers and BladeSystem

Capitalizing on HP ProLiant server and HP BladeSystem capabilities requires a service partner who understands your increasingly complex business technology environment. That's why it makes sense to team up with the people who know HP infrastructure hardware and software best - the experienced professionals at HP Services.

What HP ProLiant and BladeSystem Services can do for you

HP ProLiant and BladeSystem Services can help you design, deploy, test, integrate, support, and manage IT and infrastructure solutions. This way, HP proposes services solutions that include more than just uplift of base warranty. You can get the support you need by choosing from one of a number of service packaged solutions we have designed to address wider set of customer support needs:

HP Technology Services meets business challenges with services offered in three packages - **Optimized Care Package, Standard Care Package, and Basic Care Package** - available for each product group. Such packaged solutions enable customers to optimize technology operations, minimize risk and drive better business outcomes with easy-to-buy, easy-to-use scalable support packages for servers, storage, networking and software.

Optimized Care

Optimized Care Package: Supports maintaining servers at optimum performance availability

HP ProLiant Server Hardware Installation

Provides for the basic hardware installation of HP branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner. <http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN>

HP Installation and Startup for Insight Control Software

Provides for the deployment and basic configuration of HP Insight Control on HP ProLiant ML and DL series servers or HP BladeSystem servers. <http://h20195.www2.hp.com/v2/GetPDF.aspx/4AA0-9972ENW.pdf>

HP Proactive Care 24x7 Service

HP recommends Proactive Care for your scalable servers to prevent problems with proactive advice and assistance, resolve issues and rapidly recover by connecting to HP's enhanced call experience and advanced technical expertise.

Service and Support

Standard Care

Standard Care Package: Package that maintains high level of server availability

HP ProLiant Server Hardware Installation

Provides for the basic hardware installation of HP branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner

<http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN>

HP Installation and Startup for Insight Control Software

Provides for the deployment and basic configuration of HP Insight Control on HP ProLiant ML and DL series servers or HP BladeSystem servers <http://h20195.www2.hp.com/v2/GetPDF.aspx/4AA0-9972ENW.pdf>

HP Proactive Care Next Business Day Service

This services combines next-business-day onsite hardware reactive support with proactive services and enhanced access to call specialists to manage and prevent problems.

3-Year , HP 24x7 Software Support for Insight Control

Provides for the deployment and basic configuration of HP Insight Control on HP ProLiant ML and DL series servers or HP BladeSystem servers

<http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-6645EEE.pdf>

Additional Services: Software OS (Microsoft, Linux (SUSE/Red Hat) & VMware Installation & Start Up, and Software Support; Install and Startup Services for Insight Control; Microsoft or Linux or VMware education courses; +30 Proactive Select Credits, Factory Express

Basic Care

Basic Care Package: delivers minimum recommended support service level

HP ProLiant Server Hardware Installation

Provides for the basic hardware installation of HP branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner

<http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN>

HP Installation and Startup for Insight Control Software

Provides for the deployment and basic configuration of HP Insight Control on HP ProLiant ML and DL series servers or HP BladeSystem servers <http://h20195.www2.hp.com/v2/GetPDF.aspx/4AA0-9972ENW.pdf>

HP Foundation Care Next Business Day Service

HP Foundation Care Next Business Day connects you to HP during business hours for assistance on resolving issues - features next business day hardware onsite response and software call back within two hours after opening your case. Make HP your first call for hardware or software questions; Collaborative Support is included in all Foundation Care Services for this product and provides troubleshooting assistance on software such as Microsoft Server, Red Hat Linux, VMware and more. Three years' coverage recommended with HP Care Pack Service.

3-Year , HP 24x7 Software Support for Insight Control

Provides for the deployment and basic configuration of HP Insight Control on HP ProLiant ML and DL series servers or HP BladeSystem servers

<http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-6645EEE.pdf>

Additional Services: Software OS (Microsoft, Linux (SUSE/Red Hat) & VMware Installation & Start Up and

Service and Support

Software Support); +10 Proactive Select Credits, Factory Express

Insight Remote Support The packages include HP Insight Remote Support that uses proven technology to deliver secure, reliable 24x7 remote monitoring, diagnoses, and problem resolution. It is available at no additional cost to all warranty, HP Care Pack Service, and service agreement customers.

For more information To learn more on HP ProLiant servers and HP BladeSystem servers, please contact your HP sales representative or HP Authorized Channel Partner. Or visit: <http://www.hp.com/services/proliant>

Configuration Information - Factory Integrated Models

NOTE: This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for information on configurable product offerings and requirements.

NOTE: Configure-to-order (CTO) servers must start with a CTO Chassis.

NOTE: FIO indicates that this option is only available as a factory installable option.

Step 1: Base Configuration (choose one from each list unless otherwise noted)

HP Chassis	HP ProLiant e2000 G6 Configure-to-order Chassis	609326-B21
HP Drive Cage Options	HP 8 LFF DL2000 FIO Hard Drive Cage with Backplane Kit	611431-B21
	HP 16 SFF Hard Drive Cage/Backplane DL2000 FIO Kit	611433-B21
	HP 24 SFF Hard Drive Cage/Backplane DL2000 FIO Kit	611434-B21
	NOTE: for configurations with the 12 LFF HDD Cage, please contact your HP representative.	
HP Rail Kits	HP DL2000 Hardware Rail Kit	611428-B21
	NOTE: 2U rail kit used for HP or 3rd party racks - allows addition of one e2000 chassis at a time.	
	HP 10U Bulk Rail 2U Kit	612901-B21
	NOTE: 10U rail kit used for HP racks ONLY - allows addition of five e2000 chassis at a time.	
HP Drive Cage Cable Kits	NOTE: Required Drive Cage Cable kits for the DL2000. These cables connect the midplane to the drive backplane and are based on the drive cage used and the number of nodes.	
	2 Node 8LFF Configurations - order the following cables to connect the midplane to the drive backplane:	
	HP Mini-SAS to SATA 20/25/29cm FIO Cable Kit	612256-B21
	NOTE: Quantity 1 per chassis.	
	HP Mini-SAS to SATA 25/20/29cm FIO Cable Kit	612257-B21
	NOTE: Quantity 1 per chassis.	
	HP Mini-SAS to SAS 160mm A FIO Cable Kit	630874-B21
	NOTE: Quantity 1 per chassis.	
	HP Mini-SAS to Mini-SAS 33cm FIO Cable Kit	612255-B21
	NOTE: Quantity 1 per chassis.	
	2 Node 16SFF Configurations - order the following cables to connect the midplane to the drive backplane:	
	HP Mini-SAS to Mini-SAS 25cm FIO Cable Kit	612254-B21
	NOTE: Quantity 1 per chassis.	
	HP Mini-SAS to Mini-SAS 33cm FIO Cable Kit	612255-B21
	NOTE: Quantity 2 per chassis.	
	HP Mini-SAS 45cm FIO Cable Kit	625805-B21
	NOTE: Quantity 1 per chassis.	
	2 Node 24 SFF Configurations - order the following cables to connect the midplane to the drive backplane:	
	HP Mini-SAS to Mini-SAS 25cm FIO Cable Kit	612254-B21
	NOTE: Quantity 4 per chassis.	

Configuration Information - Factory Integrated Models

HP Mini-SAS to Mini-SAS 33cm FIO Cable Kit 612255-B21
NOTE: Quantity 3 per chassis.

HP Mini-SAS 45cm FIO Cable Kit 625805-B21
NOTE: Quantity 1 per chassis.

4 Node 8LFF Configurations - order the following cables to connect the midplane to the drive backplane:

HP Mini-SAS to SAS/SATA E FIO Cable Kit 630870-B21
NOTE: Quantity 2 per chassis.

HP Mini-SAS to SAS/SATA F FIO Cable Kit 630872-B21
NOTE: Quantity 2 per chassis.

4 Node 16SFF Configurations - order the following cables to connect the midplane to the drive backplane:

HP Mini-SAS to Mini-SAS 25cm FIO Cable Kit 612254-B21
NOTE: Quantity 1 per chassis.

HP Mini-SAS to Mini-SAS 33cm FIO Cable Kit 612255-B21
NOTE: Quantity 3 per chassis.

4 Node 24 SFF Configurations - order the following cables to connect the midplane to the drive backplane:

HP Mini-SAS to Mini-SAS 25cm FIO Cable Kit 612254-B21
NOTE: Quantity 4 per chassis.

HP Mini-SAS to Mini-SAS 33cm FIO Cable Kit 612255-B21
NOTE: Quantity 3 per chassis.

HP Mini-SAS 45cm FIO Cable Kit 625805-B21
NOTE: Quantity 1 per chassis.

HP Power Supplies

NOTE: Prior to making a power supply selection it is highly recommended that the HP Power Advisor is run to determine the right size power supply for your server configuration. The HP Power Advisor is located at: www.hp.com/go/hppoweradvisor

HP 1200W Common Slot Platinum Hot Plug Power Supply Kit 578322-B21

HP 1200W Common Slot Silver Hot Plug Power Supply Kit 500172-B21

Step 1A: Choose Required Nodes (Must select either a 4-Node or 2-Node solution)

HP Nodes
 HP ProLiant DL170e G6 Node 1U Configure-to-order Server 609095-B21
 HP ProLiant DL170e G6 Node 2U Configure-to-order Server 609096-B21

Step 2: Choose Required Node Options (only one of the following from each list unless otherwise noted)

HP Processors

NOTE: If 2 processors are desired, select one xxxxxx-L21 and one xxxxxx-B21

Six-Core Processors

HP DL170e G6 Intel® Xeon® L5640 (2.26GHz/6-core/12MB/60W) FIO Processor Kit 609132-L21

HP Memory

Registered DIMMs (RDIMMs)

HP 2GB (1x2GB) Dual Rank x8 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit 500656-B21



Configuration Information - Factory Integrated Models

HP 4GB (1x4GB) Dual Rank x4 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit	500658-B21
HP 4GB (1x4GB) Single Rank x4 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit	593339-B21
HP 4GB (1x4GB) Single Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 Low Power Memory Kit	604504-B21

NOTE: Low Voltage DIMMs can only be used with Intel® Xeon® processor 5600 series processors.

HP 16GB (1x16GB) Quad Rank x4 PC3-8500 (DDR3-1066) Registered CAS-7 Memory Kit	500666-B21
HP 8GB (1x8GB) Dual Rank x4 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit	500662-B21
HP 8GB (1x8GB) Dual Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 Low Power Memory Kit	604506-B21

NOTE: Low Voltage DIMMs can only be used with Intel® Xeon® processor 5600 series processors.

Unbuffered with ECC DIMMs (UDIMMs)

NOTE: Maximum 12 DIMMs supported per node.

HP 2GB (1x2GB) Dual Rank x8 PC3-10600 (DDR3-1333) Unbuffered CAS-9 Memory Kit	500670-B21
HP 4GB (1x4GB) Dual Rank x8 PC3-10600 (DDR3-1333) Unbuffered CAS-9 Memory Kit	500672-B21

NOTE: All DDR3 memory option kits consist of one DIMM per kit. For detailed memory configuration rules and guidelines, please use the Online DDR3 Memory Configuration Tool: www.hp.com/go/ddr3memory-configurator.

NOTE: Kits described as LV include Low Power DIMMs. For more information on ProLiant Energy Efficient Features, see: www.hp.com/go/proliant-energy-efficient

NOTE: PC3L is a low voltage memory.

NOTE: There is a maximum support limitation of 8 ranks per memory channel (maximum of 2 quad rank DIMMs per channel)

NOTE: Memory Min and Max depends on number of processors and type of memory:

1. Processor -> R-Dimm: Min 1 // Max 8 U-Dimm: Min 1 // Max 6
2. Processors -> R-Dimm: Min 2 // Max 16 U-Dimm: Min 2 // Max 12

HP I/O Expansion Options **Full-height (Only required if PN: 609096-B21 is selected in Step 1A above)**

HP DL170h Input/Output PCIex16x4x4 FIO Riser Kit	514005-B21
HP DL170h Input/Output PCIe x8x8x8 FIO Riser Kit	503587-B21
HP DL170h Input/Output PCIe x16x8 FIO Riser Kit	512481-B21

NOTE: The 2 slot riser (P/N: 512481-B21) is the only riser option that supports the NVIDIA graphics cards.

Configuration Information - Factory Integrated Models

Step 3: Choose Additional Factory Integratable Options (only one of the following from each list unless otherwise noted)

HP Storage Controllers

NOTE: Non-Hot-Plug SATA Models: The embedded HP Smart Array B110i SATA RAID supports RAID 0,1,10 and cold-plug capability with hot-plug form factor drives. Non-hot-plug form factor hard disk drives are not supported in the DL2000.

NOTE: Hot-Plug SATA Models: A HP Smart Array B110i SATA RAID Hot-Plug Advanced Pack per server or virtual machine is required for hot-plug SATA using the embedded B110i SATA RAID controller.

NOTE: Supported controllers vary by configuration. See table below for supported controllers. For a complete list of HP Storage controllers, please see the Additional Options section of this QuickSpecs. Only FIO options are mentioned here.

Configuration	Supported Controllers
4x1U nodes with 8LFF HDD cage (2 HDDs/node max)	Embedded (SATA only) or P410 (SATA/SAS)
4x1U nodes with 16SFF HDD cage (4 HDDs/node max)	Embedded (SATA only) or P212 or P410 (SATA/SAS)
4x1U nodes with 24SFF HDD cage (6 HDDs/node max)	Embedded (SATA only) or P410 (SATA/SAS)
2x2U nodes with 8LFF HDD cage (4 HDDs/node max)	Embedded (SATA only) or P212, P410 or P812 (SATA/SAS)
2x2U nodes with 16SFF HDD cage (8 HDDs/node max)	P410 or P812 (SATA/SAS)
2x2U nodes with 24SFF HDD cage (12 HDDs/node max)	P410 or P812 (SATA/SAS) and SAS Expander

HP Smart Array P410/ZM 2-ports Int PCIe x8 FIO SAS Controller

462860-B21

Controller Cable Kits

NOTE: Required Controller Cables for the DL2000. The Controller Cables below connect to the adapter board and is based on the controller used. (If using a configurator, these cable kits will automatically be included based on controller selection.) For a complete list of HP Controller Cable Kits, please see the Additional Options section of this QuickSpecs. Only FIO options are mentioned here.

HP DL170e G6 Smart Array P410 Controller Cable Kit

612206-B21

NOTE: Supports SAS and SATA drives when using Smart Array P410 Controller.

HP DL170e G6 Smart Array Controller Cable Kit

612207-B21

NOTE: Supports SAS and SATA drives when using any Smart Array Controller other than the Smart Array P410 Controller.

Optional Upgrades

HP Smart Array Hot Plug Advance Pack for B110i w/1y 24x7 Supp Physical 1 Svr LTU

TC421A

Step 4: Choose Additional Options for Factory Integration

NOTE: For additional options, please refer to the "Core Options" and "Additional Options" section below.

Core Options

NOTE: Some options may not be integrated at the factory. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for additional information.

HP Unique Options	<p>HP DL170e G6 Smart Array P410 Controller Cable Kit 612206-B21 NOTE: This cable kit is only required when upgrading with a Smart Array P410 Controller after initial purchase. NOTE: Supports SAS and SATA drives when using Smart Array P410 Controller.</p> <p>HP DL170e G6 Smart Array Controller Cable Kit 612207-B21 NOTE: This cable kit is only required when upgrading with any Smart Array Controller other than the P410 after initial purchase. NOTE: Supports SAS and SATA drives when using any Smart Array Controller other than the Smart Array P410 Controller.</p> <p>HP DL170e G6 Graphics Processing Unit Adapter Card Kit 612253-B21 NOTE: This kit is required when installing a NVIDIA card in the DL170e 2U server node.</p> <p>HP Rack Rail Shipping Bracket Kit 626167-B21 NOTE: This kit is required after initial purchase when shipping a DL2000 in a rack with 1U or more of space above it from one location to another.</p> <p>HP DL2000 Server Node Servicing Blank Kit 612898-B21</p>
--------------------------	---

HP Processors

Six-Core Processors

HP DL170e G6 Intel® Xeon® X5675 (3.06GHz/6-core/12MB/95W) Processor Kit	638021-B21
HP DL170e G6 Intel® Xeon® X5660 (2.80GHz/6-core/12MB/95W) Processor Kit	609142-B21
HP DL170e G6 Intel® Xeon® X5650 (2.66GHz/6-core/12MB/95W) Processor Kit	609140-B21
HP DL170e G6 Intel® Xeon® E5649 (2.53GHz/6-core/12MB/80W) Processor Kit	638019-B21
HP DL170e G6 Intel® Xeon® E5645 (2.40GHz/6-core/12MB/80W) Processor Kit	638017-B21
HP DL170e G6 Intel® Xeon® L5640 (2.26GHz/6-core/12MB/60W) Processor Kit	609132-B21

Quad-Core Processors

HP DL170e G6 Intel® Xeon® E5620 (2.40GHz/4-core/12MB/80W) Processor Kit	609136-B21
HP DL170e G6 Intel® Xeon® L5630 (2.13GHz/4-core/12MB/40W) Processor Kit	612468-B21
HP DL170e G6 Intel® Xeon® E5607 (2.26GHz/4-core/8MB/80W) Processor Kit	638015-B21
HP DL170e G6 Intel® Xeon® E5603 (1.60GHz/4-core/4MB/80W) Processor Kit	638013-B21

Core Options

HP Memory

Registered DIMMs (RDIMMs)

HP 2GB (1x2GB) Dual Rank x8 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit	500656-B21
HP 4GB (1x4GB) Dual Rank x4 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit	500658-B21
HP 4GB (1x4GB) Single Rank x4 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit	593339-B21
HP 4GB (1x4GB) Single Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 Low Power Memory Kit	604504-B21

NOTE: Low Voltage DIMMs can only be used with Intel® Xeon® processor 5600 series processors.

HP 16GB (1x16GB) Quad Rank x4 PC3-8500 (DDR3-1066) Registered CAS-7 Memory Kit	500666-B21
HP 8GB (1x8GB) Dual Rank x4 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit	500662-B21
HP 8GB (1x8GB) Dual Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 Low Power Memory Kit	604506-B21

NOTE: Low Voltage DIMMs can only be used with Intel® Xeon® processor 5600 series processors.

Unbuffered with ECC DIMMs (UDIMMs)

NOTE: Maximum 12 DIMMs supported per node.

HP 2GB (1x2GB) Dual Rank x8 PC3-10600 (DDR3-1333) Unbuffered CAS-9 Memory Kit	500670-B21
HP 4GB (1x4GB) Dual Rank x8 PC3-10600 (DDR3-1333) Unbuffered CAS-9 Memory Kit	500672-B21

NOTE: All DDR3 memory option kits consist of one DIMM per kit. For detailed memory configuration rules and guidelines, please use the Online DDR3 Memory Configuration Tool: www.hp.com/go/ddr3memory-configurator.

NOTE: Kits described as LV include Low Power DIMMs. For more information on ProLiant Energy Efficient Features, see: www.hp.com/go/proliant-energy-efficient

NOTE: PC3L is a low voltage memory.

NOTE: Memory DIMM blanks are required in any empty DIMM slots for proper cooling. If DIMMs are removed or the memory configuration is changed, all DIMM slots must be populated with either a blank or a DIMM.

NOTE: There is a maximum support limitation of 8 ranks per memory channel (maximum of 2 quad rank DIMMs per channel)

NOTE: Memory Min and Max depends on number of processors and type of memory:

1. Processor -> R-Dimm: Min 1 // Max 8 U-Dimm: Min 1 // Max 6
2. Processors -> R-Dimm: Min 2 // Max 16 U-Dimm: Min 2 // Max 12

HP Hard Drives

NOTE: The components of a storage subsystem (e.g. the drive, the HBA/controller, firmware, and the server backplane) should operate at the same data transfer rate or the system bandwidth will be negotiated down to an acceptable level for all components.

NOTE: Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

NOTE: To support HP hard drives exceeding 2.2 TB, HP Smart Array Firmware version 5.0 or later is required for the following controllers:

- HP Smart Array P212 Controller
- HP Smart Array P410 Controller
- HP Smart Array P411 Controller

Core Options

- HP Smart Array P812 Controller

To use hard drives exceeding 2.2 TB, you must create a boot volume using offline ACU version 8.75 or later. HP Smart Array controllers do not support boot volumes exceeding 2.2 TB.

Other controllers are not supported.

SAS Hot Plug SFF (2.5-inch) Enterprise (ENT) Drives

HP 900GB 6G SAS 10K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	619291-B21
HP 600GB 6G SAS 10K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	581286-B21
HP 450GB 6G SAS 10K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	581284-B21
HP 300GB 6G SAS 10K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	507127-B21
HP 300GB 6G SAS 15K rpm SFF (2.5-inch) Hot Plug Enterprise 3yr Warranty Hard Drive	627117-B21
HP 146GB 6G SAS 15K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	512547-B21

SAS Hot Plug LFF (3.5-inch) Enterprise (ENT) Drives

HP 600GB 6G SAS 15K rpm LFF (3.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	516828-B21
HP 450GB 6G SAS 15K rpm LFF (3.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	516816-B21
HP 300GB 6G SAS 15K rpm LFF (3.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	516814-B21

SAS Hot Plug SFF (2.5-inch) Midline (MDL) Drives

HP 1TB 6G SAS 7.2K rpm SFF (2.5-inch) Dual Port Midline 1yr Warranty Hard Drive	605835-B21
HP 500GB 6G SAS 7.2K rpm SFF (2.5-inch) Dual Port Midline 1yr Warranty Hard Drive	507610-B21

SAS Hot Plug LFF (3.5-inch) Midline (MDL) Drives

HP 3TB 6G SAS 7.2K rpm LFF (3.5-inch) Midline 1yr Warranty Hard Drive	625031-B21
HP 2TB 6G SAS 7.2K rpm LFF (3.5-inch) Dual Port Midline 1yr Warranty Hard Drive	507616-B21
HP 1TB 6G SAS 7.2K rpm LFF (3.5-inch) Dual Port Midline 1yr Warranty Hard Drive	507614-B21

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

http://h18000.www1.hp.com/products/quickspecs/12244_na/12244_na.html

SATA Hot Plug SFF (2.5-inch) Midline (MDL) Drives

HP 1TB 3G SATA 7.2K rpm SFF (2.5-inch) Hot Plug Midline 1yr Warranty Hard Drive	625609-B21
HP 500GB 3G SATA 7.2K rpm SFF (2.5-inch) Midline 1yr Warranty Hard Drive	507750-B21

SATA Hot Plug LFF (3.5-inch) Midline (MDL) Drives

HP 3TB 3G SATA 7.2K rpm LFF (3.5-inch) Midline 1yr Warranty Hard Drive	628059-B21
HP 2TB 3G SATA 7.2K rpm LFF (3.5-inch) Midline 1yr Warranty Hard Drive	507632-B21
HP 1TB 3G SATA 7.2K rpm LFF (3.5-inch) Midline 1yr Warranty Hard Drive	454146-B21
HP 500GB 3G SATA 7.2K rpm LFF (3.5-inch) Midline 1yr Warranty Hard Drive	458928-B21

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

http://h18000.www1.hp.com/products/quickspecs/13021_na/13021_na.html

6G SAS ME Hot Plug SFF (2.5-inch) Enterprise Mainstream Solid State Drives

HP 800GB 6G SAS Mainstream Endurance SFF 2.5-in Enterprise Mainstream 3yr Warranty Solid State Drive	690823-B21
HP 400GB 6G SAS Mainstream Endurance SFF 2.5-in ENT Mainstream 3yr Warranty Solid State Drive	690821-B21

Core Options

HP 200GB 6G SAS Mainstream Endurance SFF 2.5-in Enterprise Mainstream 3yr Warranty Solid State Drive 690819-B21

6G SAS SLC Hot Plug Enterprise Performance Solid State Drives

HP 400GB 6G SAS SLC SFF (2.5-inch) Enterprise Performance 3yr Warranty Solid State Drive 632494-B21

HP 200GB 6G SAS SLC SFF (2.5-inch) Enterprise Performance 3yr Warranty Solid State Drive 632492-B21

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

http://h18000.www1.hp.com/products/quickspecs/14038_na/14038_na.html

HP Networking

Gigabit Ethernet adapters

HP NC112T PCI Express Gigabit Server Adapter 503746-B21

HP NC360T PCI-E Dual Port Gigabit Server Adapter 412648-B21

HP NC364T PCI-E Quad Port Gigabit Server Adapter 435508-B21

HP NC365T 4-port Ethernet Server Adapter 593722-B21

HP NC373F PCI-E Multifunction 1000SX Gigabit Svr Adapter 394793-B21

HP NC373T PCI-E Multifunction Gigabit Server Adapter 394791-B21

HP NC382T PCI Express Dual Port Multifunction Gigabit Server Adapter 458492-B21

10 Gigabit Ethernet Adapters

NOTE: A minimum of two Gigabytes (2 GB) of server memory is required per each adapter.

NOTE: Direct Attach Cable (DAC) for copper environments or fiber transceivers and cables for fiber-optic environments must be purchased separately.

HP NC552SFP 10Gb 2-port Ethernet Server Adapter 614203-B21

NOTE: Please see the QuickSpecs for Technical Specifications and additional information: www.hp.com/go/ProLiantNICs.

HP InfiniBand

HP InfiniBand 4X QDR ConnectX-2 PCIe G2 Dual Port HCA 592520-B21

QLogic InfiniBand 4X QDR PCI-E G2 Dual Port HCA 583211-B21

NOTE: Please see the QuickSpecs for additional information:

http://h18000.www1.hp.com/products/quickspecs/13078_na/13078_na.html

HP Power Supplies

NOTE: Prior to making a power supply selection it is highly recommended that the HP Power Advisor is run to determine the right size power supply for your server configuration. The HP Power Advisor is located at: www.hp.com/go/hppoweradvisor

HP 1200W Common Slot Platinum Hot Plug Power Supply Kit 578322-B21

HP 1200W Common Slot Silver Hot Plug Power Supply Kit 500172-B21

NOTE: Option Kits contain optional power supply, an IEC power cable and PDU IEC cables.

Additional Options

NOTE: Some options may not be integrated at the factory. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for additional information.

HP Management Network HP Multinode Dedicated Management Port Option Kit 601818-B21
NOTE: Each ProLiant DL170e G6 Server comes standard with sideband support for LO100i through the shared, system NIC. Order this option (P/N 601818-B21) if a dedicated management network is desired.

HP Entry-Level Server Management HP Lights-Out 100i (LO100i) Advanced including 1yr 24x7 Support Single Server License 530521-B21
NOTE: For additional License Kits please see the Lights-Out 100i QuickSpecs at: www.hp.com/go/lo100.

HP Insight Software **HP Insight Control**

HP Insight Management Media Kit C6N31A
NOTE: HP Insight Management Media Kit contains DVDs without licenses. Contains HP Systems Insight Manager, HP Insight Control, HP Matrix Operating Environment, and Virtual Connect Enterprise Manager software. Uses an integrated installer to perform quick and accurate software installation and updates.

HP Insight Control Server Deployment including 1yr 24x7 Support Electronic License T9082AAE
HP Insight Control Server Deployment including 1yr 24x7 Support Single Server License 452151-B21
NOTE: Electronic and Flexible-Quantity licenses can be used to purchase multiple licenses with a single activation key.
NOTE: Customer will receive a license entitlement certificate. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support and Update Service.
NOTE: Licenses ship without media. The HP Insight Control Media Kit can be ordered separately, or can be downloaded at: <http://www.hp.com/go/insightupdates>.
NOTE: For additional license options please see the QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/12631_na/12631_na.html

HP Integrated Lights-Out (iLO) Advanced for ProLiant

HP iLO Advanced including 1yr 24x7 Technical Support and Updates E-LTU E6U59ABE
HP iLO Advanced including 3yr 24x7 Technical Support and Updates E-LTU E6U64ABE
NOTE: For additional license options please see the QuickSpecs at: http://h18004.www1.hp.com/products/quickspecs/14276_na/14276_na.html
NOTE: For more information, visit: <http://www.hp.com/go/ilo>

Additional Options

High Performance Clusters

HP Cluster Management Utility

HP Insight Cluster Management Utility 1yr 24x7 Flexible License

QL803B

NOTE: This part number can be used to purchase one certificate for multiple licenses with a single activation key. Each license is for one node (server). Customer will receive a printed end user license agreement and license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online in order to obtain a license key.

HP Insight Cluster Management Utility 3yr 24x7 Flexible License

BD476A

NOTE: These part numbers can be used to purchase one certificate for multiple licenses and support with a single activation key. Each license is for one node (server). Customer will receive a printed end user license agreement and license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online in order to obtain a license key. Customer also will receive a support agreement.

HP Insight Cluster Management Utility Media

BD477A

NOTE: For additional license kits please see the QuickSpecs at:

http://h18004.www1.hp.com/products/quickspecs/12612_na/12612_na.html

HP Security

HP Trusted Platform Module Option

488069-B21

NOTE: The TPM (Trusted Platform Module) is a microcontroller chip that can securely store artifacts used to authenticate the server platform. These artifacts can include passwords, certificates and encryption keys. Windows® BitLocker™ Drive Encryption (BitLocker) is a data protection feature available in Windows Server® 2008. BitLocker leverages the enhanced security capabilities of a Trusted Platform Module (TPM) version 1.2. The TPM works with BitLocker to help protect user data and to ensure that a server running Windows Server 2008 has not been tampered with while the system was offline. For more information about TPM, including a white paper, go to: www.hp.com/go/TPM.

NOTE: ProLiant OS pre-installed units will come with the partition required for TPM deployment.

NOTE: The TPM key is unique to every TPM deployed server and must be retained. Misplacing or losing the key could result in data loss.

HP Storage Controllers

HP Smart Array P212 Controller

HP Smart Array P212/256 1-ports Int/1-ports Ext PCIe x8 SAS Controller

462834-B21

HP Smart Array P212/ZM 1-ports Int/1-ports Ext PCIe x8 SAS Controller

462828-B21

HP Smart Array P410 Controller

HP Smart Array P410/256 2-ports Int PCIe x8 SAS Controller

462862-B21

HP Smart Array P410/512 FBWC 2-ports Int PCIe x8 SAS Controller

578230-B21

HP Smart Array P410/1G FBWC 2-ports Int PCIe x8 SAS Controller

572532-B21

HP Smart Array P411 Controller

HP Smart Array P411/256 2-ports Ext PCIe x8 SAS Controller

462830-B21

HP Smart Array P411/512 FBWC 2-ports Ext PCIe x8 SAS Controller

578229-B21

HP Smart Array P411/1G FBWC 2-ports Ext PCIe x8 SAS Controller

572531-B21

Smart Array P812 Controller

Additional Options

HP Smart Array P812/1G FBWC 2-ports Int/4-ports Ext PCIe x8 SAS Controller	487204-B21
Optional Upgrades	
HP DL170e G6 Smart Array P410 Controller Cable Kit	612206-B21
NOTE: This cable kit is only required when upgrading with a Smart Array P410 Controller after initial purchase.	
NOTE: Supports SAS and SATA drives when using Smart Array P410 Controller.	
HP DL170e G6 Smart Array Controller Cable Kit	612207-B21
NOTE: This cable kit is only required when upgrading with any Smart Array Controller other than the P410 after initial purchase.	
NOTE: Supports SAS and SATA drives when using any Smart Array Controller other than the Smart Array P410 Controller.	
HP 256MB P-series Cache Upgrade	462968-B21
NOTE: Supported on HP Smart Array P212 Controller only.	
HP 512MB Flash Backed Write Cache	534916-B21
HP 1GB Flash Backed Cache	534562-B21
NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/13203_na/13203_na.html (Smart Array P212 Controller) http://h18000.www1.hp.com/products/quickspecs/13201_na/13201_na.html (Smart Array P410 Controller) http://h18000.www1.hp.com/products/quickspecs/13202_na/13202_na.html (Smart Array P411 Controller) http://h18000.www1.hp.com/products/quickspecs/13558_na/13558_na.html (Smart Array P812 Controller)	
SAS Controller Options	
HP 24 Bay SAS Expander Card	468406-B21
HP Mini SAS to Mini SAS 8in Cable Assembly	496012-B21
NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://h18004.www1.hp.com/products/quickspecs/13232_na/13232_na.html (SAS Expander Card)	
SCSI HBA	
HP SC11Xe Ultra320 Single Channel/ PCIe x4 SCSI Host Bus Adapter	412911-B21
NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/12566_na/12566_na.html (SCSI HBA)	

Additional Options

HP Tape Backup

NOTE: For the complete range of tape drives, autoloaders, libraries and media see: <http://www.hp.com/go/tape>. For hardware and software compatibility of HP tape backup products see: <http://www.hp.com/storage/SPOCK>

HP StoreEver LTO-6 Ultrium 6250 Tape Drive in 1U Rack-mount Kit	COL99A
HP StoreEver 1/8 G2 LTO-6 Ultrium 6250 FC Tape Autoloader	COH19A

HP Tape Storage Systems **HP StoreEver MSL6480**

HP StoreEver MSL6480 Scalable Base Module	QU625A
---	--------

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

http://h18000.www1.hp.com/products/quickspecs/14604_na/14604_na.html
(Worldwide)

HP Disk Storage Systems **Disk Enclosures**

HP D2600 w/12 4TB 6G SAS 7.2K LFF Dual Port MDL HDD 48TB Bundle	E7W32A
---	--------

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

http://h18000.www1.hp.com/products/quickspecs/13404_na/13404_na.html
(Worldwide)

HP Storage Options

Storage Fibre Channel HBA

NOTE: The following is a list of all Fibre Channel Host Bus Adapters for Windows and Linux. For detailed compatibility information please see:

<http://h18006.www1.hp.com/storage/saninfrastructure/hba.html>

Brocade Fibre Channel HBAs

HP 81B 8Gb 1-port PCIe Fibre Channel Host Bus Adapter	AP769B
---	--------

HP 82B 8Gb 2-port PCIe Fibre Channel Host Bus Adapter	AP770B
---	--------

Emulex Fibre Channel HBAs

HP 81E 8Gb 1-port PCIe Fibre Channel Host Bus Adapter	AJ762B
---	--------

HP 82E 8Gb 2-port PCIe Fibre Channel Host Bus Adapter	AJ763B
---	--------

QLogic Fibre Channel HBAs

HP 81Q 8Gb 1-port PCIe Fibre Channel Host Bus Adapter	AK344A
---	--------

HP 82Q 8Gb 2-port PCIe Fibre Channel Host Bus Adapter	AJ764A
---	--------

Converged Network Adapter

HP CN1100E Dual Port Converged Network Adapter	BK835A
--	--------

Additional Options

HP Uninterruptible Power Systems **HP Rack-mountable UPS**

HP R1500 G3 Uninterruptible Power Supply (UPS)

HP R1.5kVA G3 1U NA Uninterruptible Power System

AF469A

NOTE: Please see the QuickSpecs for additional information:

http://h18000.www1.hp.com/products/quickspecs/14059_na/14059_na.html

HP R/T3000 G2 Uninterruptible Power System (UPS)

HP R/T3000 G2 2U L530 Low Voltage NA/JP Uninterruptible Power System

AF466A

HP R/T3000 G2 2U L620 High Voltage NA/JP Uninterruptible Power System

AF467A

NOTE: Please see the QuickSpecs for additional information:

http://h18000.www1.hp.com/products/quickspecs/14058_na/14058_na.html

R5000 Uninterruptible Power System (UPS)

HP R5KVA 3U L630 High Voltage NA/JP Uninterruptible Power System

AF460A

NOTE: Please see the QuickSpecs for additional information:

http://h18000.www1.hp.com/products/quickspecs/14109_na/14109_na.html

R7000 Uninterruptible Power System (UPS)

HP R7KVA 4U 50A High Voltage NA/JP Uninterruptible Power System

AF462A

NOTE: Please see the QuickSpecs for additional information:

http://h18000.www1.hp.com/products/quickspecs/14110_na/14110_na.html

NOTE: For additional information on HP Uninterruptible Power Systems please go to:

www.hp.com/servers/rackups.

NOTE: For additional information on sizing your server, please reference:

<http://www.upssizer.com>.

NOTE: Please see the UPS and PDU cable matrix's on the HP Power Protection and Management page. Under Power Cords, click on the "HP Power Cord Matrix" link. That link will list cable descriptions, requirements, and specifications for UPS and PDU units. Please see the following link: www.hp.com/products/powercords.

HP Basic Power Distribution Units (bPDU)

HP Basic Power Distribution Unit: 1U/OU Version

HP 1.9kVA 120 Volt L5-20 Input (12xNEMA 5-20R) NA/JP Basic PDU

H5M54A

HP 3.6kVA 200-240 Volt Detachable C20 Input (12xC13) WW Basic PDU

H5M56A

HP Basic Power Distribution Unit: Half Height Version

HP 2.8kVA 120 Volt L5-30 Input (18xNEMA 5-20R) NA/JP Basic PDU

H5M55A

HP 3.6kVA 200-240 Volt Detachable C20 Input (18xC13) WW Basic PDU

H5M57A

HP 4.9kVA 208 Volt L6-30 Input (20xC13) NA/JP Basic PDU

H5M58A

HP 8.6kVA 208 Volt L15-30 3-Phase Input (18xC13) NA/JP Basic PDU

H5M61A

HP Basic Power Distribution Unit: Mid Height Version

HP 4.9kVA 208 Volt L6-30 Input (24xC13/6xC19) NA/JP Basic PDU

H5M59A

HP 8.3kVA 208 Volt CS8265C Input (30xC13/6xC19) NA/JP Basic PDU

H5M60A

HP Hardwired 200-240 Volt Input (30xC13/6xC19) WW Basic PDU

H5M75A

HP 5.7kVA 208 Volt L21-20 3-Phase Input (24xC13/3xNEMA 5-20R) NA/JP Basic PDU

H5M63A

HP 8.6kVA 208 Volt L21-30 3-Phase Input (24xC13/3xC19/3xNEMA 5-20R) NA/JP Basic PDU

H5M64A

Additional Options

HP 8.6kVA 208 Volt L15-30 3-Phase Input (24xC13/6xC19) NA/JP Basic PDU	H5M62A
HP Basic Power Distribution Unit: Full Height Version	
HP 11kVA 400 Volt IEC309 30A 3-Phase Input (36xC13/6xC19) NA Basic PDU	H5M67A
HP Basic Power Distribution Unit: 480/277 Volt Version	
HP 13.2kVA 480 Volt IEC309 30A 3-Phase Input (15 Outlet) NA Basic PDU	H3X07A
HP 19.9kVA 480 Volt IEC309 30A 3-Phase Input (30 Outlet) NA Basic PDU	H3X08A
HP 800VA - 277V Input / 230V Output NA Rack Mount Transformer	H3X09A
NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/14557_na/14557_na.html	
NOTE: Additional HP Power Distribution Units are available. For a complete list of all HP PDUs and additional information please visit: www.hp.com/go/rackandpower .	

HP Remote Monitoring Power Distribution Units (mPDU)

HP Remote Monitored Power Distribution Unit: 1U Version	
HP 2.8kVA 120 Volt L5-30 Input (12xNEMA 5-20R)NA/JP Monitored PDU	D9N43A
HP 3.6kVA 200-240 Volt Detachable C20 Input (12xC13) WW Monitored PDU	D9N46A
HP 4.9kVA 208 Volt L6-30 Input (12xC13) NA/JP Monitored PDU	D9N44A
HP Remote Monitored Power Distribution Unit: Half Height Version	
HP 3.6kVA 200-240 Volt Detachable C20 Input (16xC13) WW Monitored PDU	D9N45A
HP Remote Monitored Power Distribution Unit: Mid Height Version	
HP 4.9kVA 208 Volt L6-30 Input (20xC13/4xC19) NA/JP Monitored PDU	D9N47A
HP 8.6kVA 208 Volt L15-30 3-Phase Input (18xC13/3xC19) NA/JP Monitored PDU	D9N51A
HP 5.7kVA 208 Volt L21-20 3-Phase Input (18xC13/3xNEMA 5-20R) NA/JP Monitored PDU	D9N52A
HP 8.6kVA 208 Volt L21-30 3-Phase Input (20xC13/3xC19/3xNEMA 5-20R) NA/JP Monitored PDU	D9N53A
HP Remote Monitored Power Distribution Unit: Full Height Version	
HP 8.3kVA 208 Volt CS8265C Input (30xC13/3xC19) NA Monitored PDU	D9N49A
HP 14.4kVA 208 Volt CS8365C 3-Phase Input (12xC13/12xC19)NA Monitored PDU	D9N58A
HP 16.6kVA 400 Volt IEC309 30A 3-Phase Input (30xC13/3xC19) NA Monitored PDU	D9N61A
HP 17.3kVA 208 Volt IEC309 60A 3-Phase Input (24xC13/3xC19) NA/JP Monitored PDU	D9N54A
HP 17.3kVA 208 Volt IEC309 60A 3-Phase Input (12xC13/12xC19) NA/JP Monitored PDU	D9N59A
HP 16.6kVA 400 Volt IEC309 30A 3-Phase Input (12xC13/12xC19) NA Monitored PDU	D9N62A
HP 19.9kVA 480 Volt 3-Phase (30 Outlet) NA Monitored PDU	D9N63A
HP Environmental Sensor for Remote Monitored PDUs	
HP Environmental Sensor for Remote Monitored PDUs	E2D53A
NOTE: Please see the QuickSpecs for additional information: http://h18000.www1.hp.com/products/quickspecs/14669_na/14669_na.html	

Additional Options

HP Intelligent Power Distribution Units (iPDU)	iPDU Core Units	
	HP 4.9kVA 24A Single Phase NA/JP Core Intelligent Modular Power Distribution Unit	AF520A
	HP 8.3kVA 40A Single Phase NA/JP Core Intelligent Modular Power Distribution Unit	AF521A
	HP 8.6kVA 24A Three Phase NA/JP Core Intelligent Modular Power Distribution Unit	AF522A
	HP 14.4kVA 40A Three Phase NA/JP Intelligent Modular Power Distribution Unit	AF533A
	HP 17.3kVA 48A Three Phase NA/JP Core Intelligent Modular Power Distribution Unit	AF523A
	HP 17.3kVA 24A 415V Three Phase L22-30 NA Core Intelligent Power Distribution Unit	AF902A
	HP 17.3kVA 48A 208V Three Phase 12 Outlet Core NA/JP Intelligent Power Distribution Unit	AF535A
	HP 17.3kVA 24A 415V Three Phase 12 Outlet Core NA/JP Intelligent Power Distribution Unit	AF537A
	iPDU Kits with Standard Extension Bars	
	HP 4.9kVA 24A Single Phase NA/JP Intelligent Modular Power Distribution Kit	AF531A
	HP 8.6kVA 24A Three Phase NA/JP Intelligent Modular Power Distribution Kit	AF532A
	iPDU Extension Bars	
	HP 5x13 Intelligent PDU Extension Bar G2 Kit	AF547A
	HP 5x13 Outlets Power and UID LEDs Pair Standard Extension Bar	AF528A
	NOTE: Please see the QuickSpecs for Technical Specifications and additional information:	
	http://h18000.www1.hp.com/products/quickspecs/13650_na/13650_na.html	
	NOTE: Additional HP Power Distribution Units are available. For a complete list of all HP PDUs and additional information please visit: www.hp.com/go/rackandpower .	

HP Rack Series	HP Intelligent Series Rack	
	HP 642 1075mm Pallet Intelligent Series Rack	BW903A
	HP 642 1075mm Shock Intelligent Series Rack	BW904A
	NOTE: Please see the QuickSpecs for Technical Specifications such as height, width, depth, weight, and color:	
	http://h18000.www1.hp.com/products/quickspecs/14223_na/14223_na.html	
	NOTE: For additional information regarding Rack Cabinets, please see the following URL: http://www.hp.com/go/rackandpower .	

Additional Options

HP Rack Options

HP TFT7600 G2 KVM Console and Monitor (TFT7600 G2)

HP TFT7600 G2 KVM Console Rackmount Keyboard US Monitor AZ870A

HP TFT7600 G2 KVM Console Rackmount Keyboard US TAA Monitor AZ885A

NOTE: Please see the [QuickSpecs for Technical Specifications and additional information:](#)

http://h18000.www1.hp.com/products/quickspecs/13731_na/13731_na.html

HP USB Keyboard and Mouse

HP USB BFR with PVC Free US Keyboard/Mouse Kit 631341-B21

NOTE: Please see the [QuickSpecs for Technical Specifications and additional information:](#)

http://h18000.www1.hp.com/products/quickspecs/13972_na/13972_na.html

HP Server Console Switches

HP Server Console 0x2x8 Port Analog Switch AF616A

HP Server Console 0x2x16 Port Analog Switch AF617A

HP TAA 0x2x16xKVM Server Console G2 Switch AF626A

NOTE: Please see the [QuickSpecs for Technical Specifications and additional information:](#)

http://h18000.www1.hp.com/products/quickspecs/11834_na/11834_na.html

HP Server Console Switch G2 with Virtual Media & CAC

HP 0x2x16 KVM Server Console Switch G2 with Virtual Media CAC Software AF618A

HP 0x2x32 KVM Server Console Switch G2 with Virtual Media CAC Software AF619A

HP KVM CAT5 1-pack USB Interface Adapter 336047-B21

NOTE: Please see the [QuickSpecs for Technical Specifications and additional information:](#)

http://h18000.www1.hp.com/products/quickspecs/13475_na/13475_na.html

HP IP Console Switch G2 with Virtual Media & CAC

HP 1x4 USB/PS2 KVM Console Switch AF611A

HP 1x1Ex8 KVM IP Console Switch G2 with Virtual Media CAC Software AF620A

HP 2x1Ex16 KVM IP Console Switch G2 with Virtual Media CAC Software AF621A

HP 4x1Ex32 KVM IP Console Switch G2 with Virtual Media CAC Software AF622A

NOTE: Please see the [QuickSpecs for Technical Specifications and additional information:](#)

http://h18000.www1.hp.com/products/quickspecs/13474_na/13474_na.html

Rail Kits

HP Rack Rail Shipping Bracket Kit 626167-B21

NOTE: This kit is required after initial purchase when shipping a DL2000 in a rack with 1U or more of space above it from one location to another.

Memory

HP ProLiant DL170e G6 Server

NOTE: Memory configurations show Maximum Memory population.

Maximum Memory

Up to 192GB, using PC3-8500R DDR3 Registered (RDIMM) memory, operating at 800MHz when fully populated at 2 DIMMs per Channel in 12 slots

Up to 48GB, using PC3-10600E DDR3 Unbuffered (UDIMM) memory, operating at 1333MHz when fully populated at 2 DIMMs per Channel in 12 slots

NOTE: RDIMMs and UDIMMs cannot be in the same system so the maximum RDIMM memory configuration can only be achieved with BTO models by replacing all of the UDIMMs.

NOTE: Chart does not represent all possible memory configurations.

DDR3 memory population guidelines

For detailed memory configuration rules and guidelines, please use the Online DDR3 Memory Configuration Tool:

www.hp.com/go/ddr3memory-configurator

- Some DIMM installation guidelines are summarized below:
- Memory DIMM blanks are required in any empty DIMM slots for proper cooling. If DIMMs are removed or the memory configuration is changed, all DIMM slots must be populated with either a blank or a DIMM.
- For servers with sixteen (16) memory slots
- There are three (3) channels per processor; six (6) channels per server
- There are two (3) DIMM slots for two memory channels and one (2) DIMM slots for one memory channel; sixteen (16) total slots
- Memory channel 1 consists of the two (2) DIMM slots that are closest to the processor
- Memory channels 2 and 3 consist of the six (6) DIMM slots that are furthest from the processor
- DIMM slots that are white should be populated first
- Do not mix Unbuffered memory (UDIMMs) with Registered memory (RDIMMs)
- Do not install DIMMs if the corresponding processor is not installed
- If only one processor is installed in a 2CPU system, only half of the DIMM slots are available
- To maximize performance, balance the total memory capacity between all installed processors
- It is not required, but it is recommended to load the channels similarly if possible
- You can only have up to eight (8) ranks installed per channel
- You can only install two quad-rank DIMMs per channel
- You can only install two UDIMMs per channel; if available, the third slot in the channel must remain empty
- Populate DIMMs from heaviest load (quad-rank) to lightest load (single-rank) within a channel
- Heaviest load (DIMM with most ranks) within a channel goes furthest from the chipset
- Low Voltage DIMMs can only be used with Intel Xeon 5600 series processors.
- For memory mirroring mode, channel 3 must be unpopulated. Channels 1 and 2 are populated identically
- For lock-step mode, channel 3 must be unpopulated. DIMMs in channels 1 and 2 will be installed in pairs. The paired slots will be 1,4; 2,5; 3,6 on a 3DPC system or 1,4; 2,5; on a 2DPC system
- If mixing DIMM voltage is a requirement, please note that the DIMMs will run at 1.5V since all 1.35V are capable of supporting 1.5V operations.

Memory

DIMM Type ->	Registered DIMMs (RDIMMs)								Unbuffered with ECC DIMMs (UDIMMs)		
	Single Rank (1R)	Dual Rank (2R)					Quad Rank (4R)		Single Rank (1R)	Dual Rank (2R)	
DIMM Rank ->	4GB	2GB	4GB	8GB	8GB	16GB	4GB	16GB	1GB	2GB	4GB
DIMM Capacity ->	1333	1333	1333	1066	1333	1333	1066	1066	1333	1333	1333
DIMM Native Speed (MHz) ->	LV/Std	Std	Std	Std	LV/Std	LV/Std	Std	Std	Std	Std	LV/Std
Voltage											
SLOTS THAT CAN BE POPULATED											
16 slot servers	16	16	16	16	16	16	12	12	12	12	12
MAXIMUM MEMORY CAPACITY (GB)											
16 slot servers	64	32	64	128	128	256	48	192	12	24	48
POPULATED DIMM SPEED (MHz)											
1 DIMM Per Channel	1333	1333	1333	1066	1333	1333	1066	1066	1333	1333	1333
2 DIMMs Per Channel	1333*	1333*	1333*	1066	1333*	1066/ 1333**	800	800	1066	1066	1333*
3 DIMMs Per Channel (on 2 channels)	800	800	800	800	800	800***	N/A	N/A	N/A	N/A	N/A

*supported with ROM update via ROM Based Setup Utility (RBSU)

** 2DPC: LV runs at 1066, Std voltage runs at 1333

***3DPC: LV/Std voltage runs at 800

NOTES:

- PC3-10600 DIMMs have a maximum speed of 1333MHz. PC3-8500 DIMMs have a maximum speed of 1066MHz
- Mixing DIMM speeds is allowed, but the system processor speed rules always override the DIMM capabilities
- If you do mix DIMM speeds, the memory bus will default to the minimum clock rate of all DIMMs in the system - even if the slower DIMM is on the other processor
- If you install 1x 1066MHz DIMM in channel 1 and 1x 1333MHz DIMM in channel 2, the maximum speed will be 1066MHz If you install 1x 1066MHz DIMM in channel 1 and 5x 1333MHz DIMMs with 1 DIMM Per Channel (DPC) in each of the other channels, the maximum speed will be 1066MHz
- If you install 3DPC in one channel (if applicable) and 1DPC in all other channels, you run at 800MHz
- Maximum memory speed will also depend on the processor installed
- References to the above MHz speeds are for the various speeds of DDR3 DIMMs; 1333 refers to DDR3-1333, etc.

DIMM slot and configuration diagrams

Basic memory slot & population diagram

- Population order; start with "A" first, "B" second, "C" third, etc. DIMM 8 is DIMM furthest away from the CPU and DIMM 1 is DIMM closest to CPU.

Memory

	CPU1		CPU2		
	slot #	population order	slot #	population order	
Chnl 1	1	A	1	A	Chnl 1
	2	D	2	D	
	3	G	3	G	
Chnl 2	4	B	4	B	Chnl 2
	5	E	5	E	
	6	H	6	H	
Chnl 3	7	C	7	C	Chnl 3
	8	F	8	F	

RDIMM maximum configuration (2 CPUs)

- 192GB, consisting of sixteen (16) 16GB quad rank PC3-8500 RDIMMs

	CPU1		CPU2		
	slot #	population order	slot #	population order	
Chnl 1	1	A; 16GB DIMM	1	A; 16GB DIMM	Chnl 1
	2	D; 16GB DIMM	2	D; 16GB DIMM	
	3	G; empty	3	G; empty	
Chnl 2	4	B; 16GB DIMM	4	B; 16GB DIMM	Chnl 2
	5	E; 16GB DIMM	5	E; 16GB DIMM	
	6	H; empty	6	H; empty	
Chnl 3	7	C; 16GB DIMM	7	C; 16GB DIMM	Chnl 3
	8	F; 16GB DIMM	8	F; 16GB DIMM	

UDIMM maximum configuration (2 CPUs)

- 48GB, consisting of twelve (12) 2GB dual-rank PC3-10600 UDIMMs


	CPU1		CPU2		
	slot #	population order	slot #	population order	
Chnl 1	1	A; 4GB DIMM	1	A; 4GB DIMM	Chnl 1
	2	D; 4GB DIMM	2	D; 4GB DIMM	
	3	G; empty	3	G; empty	
Chnl 2	4	B; 4GB DIMM	4	B; 4GB DIMM	Chnl 2
	5	E; 4GB DIMM	5	E; 4GB DIMM	
	6	H; empty	6	H; empty	
Chnl 3	7	C; 4GB DIMM	7	C; 4GB DIMM	Chnl 3
	8	F; 4GB DIMM	8	F; 4GB DIMM	

Memory

NOTE: Capacity references are rounded to the common Gigabyte values.

- 1GB = 1024MB
- 2GB = 2048MB
- 4GB = 4096MB
- 8GB = 8192MB
- 16GB = 16384MB

DDR3 memory options part number decoder



Following are memory options available from HP:

HP Memory

Registered DIMMs (RDIMMs)

HP 2GB (1x2GB) Dual Rank x8 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit	500656-B21
HP 4GB (1x4GB) Dual Rank x4 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit	500658-B21
HP 4GB (1x4GB) Single Rank x4 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit	593339-B21
HP 4GB (1x4GB) Single Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 Low Power Memory Kit	604504-B21

NOTE: Low Voltage DIMMs can only be used with Intel® Xeon® processor 5600 series processors.

HP 16GB (1x16GB) Quad Rank x4 PC3-8500 (DDR3-1066) Registered CAS-7 Memory Kit	500666-B21
HP 8GB (1x8GB) Dual Rank x4 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit	500662-B21
HP 8GB (1x8GB) Dual Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 Low Power Memory Kit	604506-B21

NOTE: Low Voltage DIMMs can only be used with Intel® Xeon® processor 5600 series processors.

Unbuffered with ECC DIMMs (UDIMMs)

NOTE: Maximum 12 DIMMs supported per node.

HP 2GB (1x2GB) Dual Rank x8 PC3-10600 (DDR3-1333) Unbuffered CAS-9 Memory Kit	500670-B21
HP 4GB (1x4GB) Dual Rank x8 PC3-10600 (DDR3-1333) Unbuffered CAS-9 Memory Kit	500672-B21

NOTE: All DDR3 memory option kits consist of one DIMM per kit. For detailed memory configuration rules and guidelines, please use the [Online DDR3 Memory Configuration](#)

Memory

Tool: www.hp.com/go/ddr3memory-configurator.

NOTE: Kits described as LV include Low Power DIMMs. For more information on ProLiant Energy Efficient Features, see: www.hp.com/go/proliant-energy-efficient


NOTE: PC3L is a low voltage memory.

NOTE: There is a maximum support limitation of 8 ranks per memory channel (maximum of 2 quad rank DIMMs per channel)


NOTE: Memory Min and Max depends on number of processors and type of memory:

1. Processor -> R-Dimm: Min 1 // Max 8 U-Dimm: Min 1 // Max 6
2. Processors -> R-Dimm: Min 2 // Max 16 U-Dimm: Min 2 // Max 12


Storage

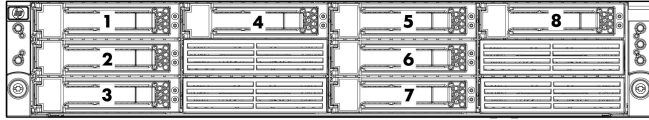


1-8 Eight 3.5" Hot-plug SAS/SATA hard drive bays (two node configuration)



1-8 Eight 3.5" Hot-plug SAS/SATA hard drive bays (four node configuration)

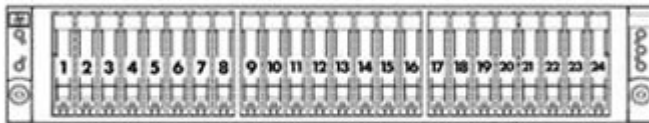

1-24 Twenty-four 2.5" Hot-plug SAS/SATA hard drive bays

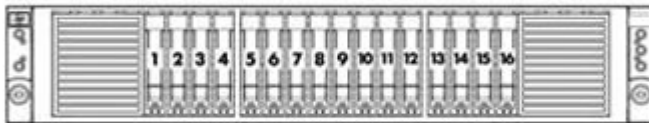

1-16 Sixteen 2.5" Hot-plug SAS/SATA hard drive bays

Drive Support

Removable Media

	Quantity Supported	Position Supported	Controller
DVD-ROM	Up to 2 per node	External	USB
DVD/CD RW	Up to 2 per node	External	USB

Storage

Hard Drives

NOTE: The components of a storage subsystem (e.g. the drive, the HBA/controller, firmware, and the server backplane) should operate at the same data transfer rate or the system bandwidth will be negotiated down to an acceptable level for all components.

NOTE: Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

NOTE: To support HP hard drives exceeding 2.2 TB, HP Smart Array Firmware version 5.0 or later is required for the following controllers:

- HP Smart Array P212 Controller
- HP Smart Array P410 Controller
- HP Smart Array P411 Controller
- HP Smart Array P812 Controller

To use hard drives exceeding 2.2 TB, you must create a boot volume using offline ACU version 8.75 or later. HP Smart Array controllers do not support boot volumes exceeding 2.2 TB.

Other controllers are not supported.

SAS Hot Plug SFF (2.5-inch) Enterprise (ENT) Drives

	Quantity Supported	Position Supported	Controller
900GB 6G SAS 10K	24	1-24	HP Smart Array P212/Zero Memory Controller
600GB 6G SAS 10K			HP Smart Array P212/256 MB Controller
450GB 6G SAS 10K			HP Smart Array P410/256 MB Controller
300GB 6G SAS 10K			HP Smart Array P410/512 MB BBWC Controller
300GB 6G SAS 15K			
146GB 6G SAS 15K			

SAS Hot Plug LFF (3.5-inch) Enterprise (ENT) Drives

	Quantity Supported	Position Supported	Controller
600GB 6G SAS 15K	Up to 8	1-8	HP Smart Array P212/Zero Memory Controller
450GB 6G SAS 15K			HP Smart Array P212/256 MB Controller
300GB 6G SAS 15K			HP Smart Array P410/256 MB Controller
			HP Smart Array P410/512 MB BBWC Controller

SAS Hot Plug SFF (2.5-inch) Midline (MDL) Drives

	Quantity Supported	Position Supported	Controller
1TB 6G SAS 7.2K	Up to 24	1-24	HP Smart Array P212/Zero Memory Controller
500GB 6G SAS 7.2K			HP Smart Array P212/256 MB Controller
			HP Smart Array P410/256 MB Controller
			HP Smart Array P410/512 MB BBWC Controller

SAS Hot Plug LFF (3.5-inch) Midline (MDL) Drives

Quantity Supported	Position Supported	Controller
--------------------	--------------------	------------

Storage

2TB 6G SAS 7.2K	Up to 8	1-8	HP Smart Array P212/Zero Memory Controller
1TB 6G SAS 7.2K			HP Smart Array P212/256 MB Controller
			HP Smart Array P410/256 MB Controller
			HP Smart Array P410/512 MB BBWC Controller

SATA Hot Plug SFF (2.5-inch) Midline (MDL) Drives

	Quantity Supported	Position Supported	Controller
1TB 3G SATA 7.2K	24	1-24	Embedded HP Smart Array Hot Plug Advanced Pack for B110i (RAID 0, 1, 10)
500GB 3G SATA 7.2K			HP Smart Array P212/Zero Memory Controller
			HP Smart Array P212/256 MB Controller
			HP Smart Array P410/256 MB Controller
			HP Smart Array P410/512 MB BBWC Controller

SATA Hot Plug LFF (3.5-inch) Midline (MDL) Drives

	Quantity Supported	Position Supported	Controller
2TB 3G SATA 7.2K	Up to 8	1-8	Embedded HP Smart Array Hot Plug Advanced Pack for B110i (RAID 0, 1, 10)
1TB 3G SATA 7.2K			HP Smart Array P212/Zero Memory Controller
500GB 3G SATA 7.2K			HP Smart Array P212/256 MB Controller
			HP Smart Array P410/256 MB Controller
			HP Smart Array P410/512 MB BBWC Controller

SATA Hot Plug 3.5" Midline (MDL) Solid State Drives

	Quantity Supported	Position Supported	Controller
120GB 3.0G SATA	Up to 8	1-8	Embedded HP Smart Array Hot Plug Advanced Pack for B110i (RAID 0, 1, 10)
60GB 3.0G SATA			HP Smart Array P212/Zero Memory Controller
			HP Smart Array P212/256 MB Controller
			HP Smart Array P410/256 MB Controller
			HP Smart Array P410/512 MB BBWC Controller

6G SAS Hot Plug Enterprise Performance Solid State Drives

	Quantity Supported	Position Supported	Controller
200GB 6G SAS SLC SFF	24	1-24	HP Smart Array P212/Zero Memory Controller
400GB 6G SAS SLC SFF			HP Smart Array P212/256 MB Controller
			HP Smart Array P410/256 MB Controller
			HP Smart Array P410/512 MB BBWC Controller

Power Specifications

HP 1200W Common Slot Platinum Hot Plug Power Supply Kit							
Part Number	578322-B21						
Input Voltage Range (V rms)	100 to 240						
Frequency Range (Nominal) (Hz)	50/60						
Nominal Input Voltage (Vrms)	100	120	200	208	220	230	240
Maximum Rated Output Wattage Rating	800	900	1200	1200	1200	1200	1200
Nominal Input Current (A rms)	9.3	8.6	6.7	6.5	6.1	5.8	5.6
Maximum Rated Input Wattage Rating (Watts)	889	989	1290	1290	1290	1290	1290
Maximum Rated VA (Volt-Amp)	927	1031	1345	1345	1345	1345	1345
Efficiency (%)	90	91	93	93	93	93	93
Power Factor	0.97						
Leakage Current (mA)	0.42	0.50	0.83	0.87	0.92	0.96	1.00
Maximum Inrush Current (A peak)	30						
Maximum Inrush Current duration (mS)	10						
Maximum British Thermal Unit Rating (BTU-Hr)	3033	3375	4403	4403	4403	4403	4403

HP 1200W Common Slot Silver Hot Plug Power Supply Kit							
Part Number	500172-B21						
Input Voltage Range (V rms)	100 to 240						
Frequency Range (Nominal) (Hz)	50/60						
Nominal Input Voltage (Vrms)	100	120	200	208	220	230	240
Maximum Rated Output Wattage Rating	800	900	1200	1200	1200	1200	1200
Nominal Input Current (A rms)	9.7	9.0	7.0	6.8	6.4	6.1	5.9
Maximum Rated Input Wattage Rating (Watts)	930	1034	1348	1348	1348	1348	1348
Maximum Rated VA (Volt-Amp)	970	1079	1406	1406	1406	1406	1406
Efficiency (%)	86	87	89	89	89	89	89
Power Factor	0.97						
Leakage Current (mA)	0.42	0.50	0.83	0.87	0.92	0.96	1.00
Maximum Inrush Current (A peak)	30						
Maximum Inrush Current duration (mS)	20						
Maximum British Thermal Unit Rating (BTU-Hr)	3174	3530	4600	4600	4600	4600	4600

To review typical system power ratings use the Active Answers HP Power Advisor which is available via the online tool located at URL: www.hp.com/go/proliant-energy-efficient or www.hp.com/go/hppoweradvisor

System Specifications

Power		
ProLiant DL170e G6 Fully Configured	115V/60Hz	220V/50Hz
Fully Loaded System Input Wattage (W)	651	638
Fully Loaded System Input Current (A rms)	5.7	3.0
Fully Loaded System Thermal (BTU- Hr)	2218	2174
Fully Loaded System VA (Volt-Amp)	657	657
System Leakage with all power supplies loaded (mA)	1.58	3.03
System Inrush Current with all power supplies loaded (A)	19	37
Power cord requirements	Nema 5-15P to IEC320-C13	IEC320-C13 to IEC320-C14
NOTE: Power shown is for a fully configured system consisting of (2) CPUs, (16) DIMMs, (2) HDDs, and (1) PCI card per node.		
Power Cord		AF556A

Server Power Cords

One 6' Highline (IEC-IEC) power cord ships standard

NOTE: ProLiant DL servers are primarily connected to PDU's in data center racks so they ship standard with only a PDU power cord (416151-B21).

NOTE: If customers require a power cord, they can check the power cord matrix for the appropriate cord. Please see the following power cord matrix: <http://www.hp.com/go/powercordmatrix>.

Technical Specifications

System Unit	Dimensions (H x W x D) (with bezel)	3.44 x 17.64 x 28.91 in (8.74 x 44.81 x 73.43 cm)								
	Weight (approximate)	<table border="0"> <tr> <td style="padding-right: 20px;">Maximum</td> <td>77.00 lb (34.93 kg)</td> </tr> <tr> <td colspan="2">(all hard drives, power supplies, and processors installed)</td> </tr> <tr> <td>Minimum</td> <td>49.00 lb (22.22 kg)</td> </tr> <tr> <td colspan="2">(one hard drive, power supply, and processor installed)</td> </tr> </table>	Maximum	77.00 lb (34.93 kg)	(all hard drives, power supplies, and processors installed)		Minimum	49.00 lb (22.22 kg)	(one hard drive, power supply, and processor installed)	
Maximum	77.00 lb (34.93 kg)									
(all hard drives, power supplies, and processors installed)										
Minimum	49.00 lb (22.22 kg)									
(one hard drive, power supply, and processor installed)										
	Input Requirements (per power supply)	<table border="0"> <tr> <td style="padding-right: 20px;">Rated Line Voltage</td> <td>90 to 140 VAC 180 to 264 VAC</td> </tr> <tr> <td>Rated Input Current</td> <td>7.31A at 115VAC 3.6A at 230VAC</td> </tr> <tr> <td>Rated Input Frequency</td> <td>47 to 63 Hz</td> </tr> <tr> <td>Rated Input Power</td> <td>855W (at 100 VAC), 840.72W (at 200 VAC)</td> </tr> </table>	Rated Line Voltage	90 to 140 VAC 180 to 264 VAC	Rated Input Current	7.31A at 115VAC 3.6A at 230VAC	Rated Input Frequency	47 to 63 Hz	Rated Input Power	855W (at 100 VAC), 840.72W (at 200 VAC)
Rated Line Voltage	90 to 140 VAC 180 to 264 VAC									
Rated Input Current	7.31A at 115VAC 3.6A at 230VAC									
Rated Input Frequency	47 to 63 Hz									
Rated Input Power	855W (at 100 VAC), 840.72W (at 200 VAC)									
	Power Specifications	NOTE: To review typical system power ratings use the HP Power Advisor which is available online located at url: www.hp.com/go/proliant-energy-efficient or www.hp.com/go/hppoweradvisor								
	Power Supply Output (per power supply)	Rated Steady-State Power 653.10W (at 100 VAC), 653.08W (at 200 VAC)								
	System Inlet Temperature	<table border="0"> <tr> <td style="padding-right: 20px;">Operating</td> <td>50° to 95° F (10° to 35° C) at sea level with an altitude derating of 1.8°F per every 1000 ft (1.0°C per every 304.8 m) above sea level to a maximum of 10,000 ft (3048 m), no direct sustained sunlight. Maximum rate of change is 18°F/hr (10°C/hr). The upper limit may be limited by the type and number of options installed. System performance may be reduced if operating with a fan fault or above 86°F (30°C).</td> </tr> <tr> <td>Non-operating</td> <td>40° to 140° F (-40° to 60° C) Maximum rate of change is 36°F/hr (20°C/hr).</td> </tr> </table>	Operating	50° to 95° F (10° to 35° C) at sea level with an altitude derating of 1.8°F per every 1000 ft (1.0°C per every 304.8 m) above sea level to a maximum of 10,000 ft (3048 m), no direct sustained sunlight. Maximum rate of change is 18°F/hr (10°C/hr). The upper limit may be limited by the type and number of options installed. System performance may be reduced if operating with a fan fault or above 86°F (30°C).	Non-operating	40° to 140° F (-40° to 60° C) Maximum rate of change is 36°F/hr (20°C/hr).				
Operating	50° to 95° F (10° to 35° C) at sea level with an altitude derating of 1.8°F per every 1000 ft (1.0°C per every 304.8 m) above sea level to a maximum of 10,000 ft (3048 m), no direct sustained sunlight. Maximum rate of change is 18°F/hr (10°C/hr). The upper limit may be limited by the type and number of options installed. System performance may be reduced if operating with a fan fault or above 86°F (30°C).									
Non-operating	40° to 140° F (-40° to 60° C) Maximum rate of change is 36°F/hr (20°C/hr).									
	Relative Humidity (non-condensing)	<table border="0"> <tr> <td style="padding-right: 20px;">Operating</td> <td>10% to 85% relative humidity (Rh), 82.4°F (28°C) maximum wet bulb temperature, non-condensing.</td> </tr> <tr> <td>Non-operating</td> <td>10% to 95% relative humidity (Rh), 101.7°F (38.7°C) maximum wet bulb temperature, non-condensing.</td> </tr> </table>	Operating	10% to 85% relative humidity (Rh), 82.4°F (28°C) maximum wet bulb temperature, non-condensing.	Non-operating	10% to 95% relative humidity (Rh), 101.7°F (38.7°C) maximum wet bulb temperature, non-condensing.				
Operating	10% to 85% relative humidity (Rh), 82.4°F (28°C) maximum wet bulb temperature, non-condensing.									
Non-operating	10% to 95% relative humidity (Rh), 101.7°F (38.7°C) maximum wet bulb temperature, non-condensing.									
	Altitude	<table border="0"> <tr> <td style="padding-right: 20px;">Operating</td> <td>10,000 ft (3048 m). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 1500 ft/min (457 m/min).</td> </tr> <tr> <td>Non-operating</td> <td>30,000 ft (9144 m). Maximum allowable altitude change rate is 1500 ft/min (457 m/min).</td> </tr> </table>	Operating	10,000 ft (3048 m). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 1500 ft/min (457 m/min).	Non-operating	30,000 ft (9144 m). Maximum allowable altitude change rate is 1500 ft/min (457 m/min).				
Operating	10,000 ft (3048 m). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 1500 ft/min (457 m/min).									
Non-operating	30,000 ft (9144 m). Maximum allowable altitude change rate is 1500 ft/min (457 m/min).									
	Acoustic Noise	Listed are the declared A-Weighted sound power levels (LWAd) and declared								

Technical Specifications

average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109). The listed sound levels apply to minimally populated shipping configurations. Additional options may result in increased sound levels.

	Node type	1U	2U
Emissions Classification (EMC)	Idle		
	<i>L_{WAd}</i>	6.4 B	6.5 B
	<i>L_{pAm}</i>	47 dBA	48 dBA
	Operating		
	<i>L_{WAd}</i>	6.4 B	6.5 B
	<i>L_{pAm}</i>	47 dBA	48 dBA
	FCC Rating	Class A	
	Normative Standards	CISPR 22; EN55022; EN55024; FCC CFR 47, Pt 15; ICES-003; CNS13438; GB9254; K22;K24; EN 61000-3-2; EN 61000-3-3; EN 60950-1; IEC 60950-1	

NOTE: Product conformance to cited product specifications is based on sample (type) testing, evaluation, or assessment. This product or family of products is eligible to bear the appropriate compliance logos and statements.

HP Smart Array B110i SATA RAID Controller	Simultaneous drive transfer channels	4 channels
	Transfer rate synchronous (maximum theoretical)	1.5 Gb/s
	Data transfer method	Intel® ICH10R
	Drive support	Serial ATA
	Data transfer modes	Legacy Mode Combined Mode
	Protocol	Serial ATA
	Feature	NCQ (Native Command Queuing); AHCI (Advanced Host Controller Interface)
	RAID levels supported	0, 1, 10
	RAID Features	Supports multiple logical volumes Setup through ROM based Array Configuration Utility Installation scripting support
		NOTE: Hot-Plug functions require the purchase of the HP Smart Array Hot Plug Advance Pack for B110i.
	RAID OS Support	Microsoft Windows Server 2003 x32 and x64 Editions Microsoft Windows Server 2008 x32 and x64 Editions. Red Hat Enterprise Linux 4 (x86) Red Hat Enterprise Linux 5 (x86) Red Hat Enterprise Linux 5 (AMD64/EM64T) SUSE Linux Enterprise Server 10 (x86)

Technical Specifications

SUSE Linux Enterprise Server 10 (AMD64/EM64T)
SUSE Linux Enterprise Server 11 (x86)
SUSE Linux Enterprise Server 11 (AMD64/EM64T)

Embedded NC362i PCIe Gigabit Server Adapter	Network Interface	Integrated 10/100/1000BASE-T Transceiver	
		Combines a triple-speed IEEE 802.3TM - Compliant Media Access Controller (MAC) with a triple-speed Ethernet transceiver.	
	Data Transfer Method	Compliant to x4 PCIe Specification	
	Controller	Intel® 82576	
	Network Transfer Rate	10Base-T (Half-Duplex)	10 Mb/s
		10Base-T (Full-Duplex)	20 Mb/s
100Base-TX (Half-Duplex)		100 Mb/s	
100Base-TX (Full-Duplex)		200 Mb/s	
1000Base-TX (Half and Full-Duplex)		2000Mb/s	
Connector	RJ-45 connector		
Cable Support	Performs all the physical layer functions for 10BASE-T, 100BASE-T, and 1000BASE-T Ethernet on standard Category 5 UTP		

Environment-friendly Products and Approach	End-of-life Management and Recycling	Hewlett-Packard offers end-of-life HP product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to: http://www.hp.com/go/green . To recycle your product, please go to: http://www.hp.com/go/green or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.
---	---	--

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/green>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

© Copyright 2014 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation. Intel, the Intel logo, Xeon and Xeon Inside are trademarks of Intel Corporation in the U.S. and other countries.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less.

