



PBAT GATE Firmware Upgrade manual-V3.3

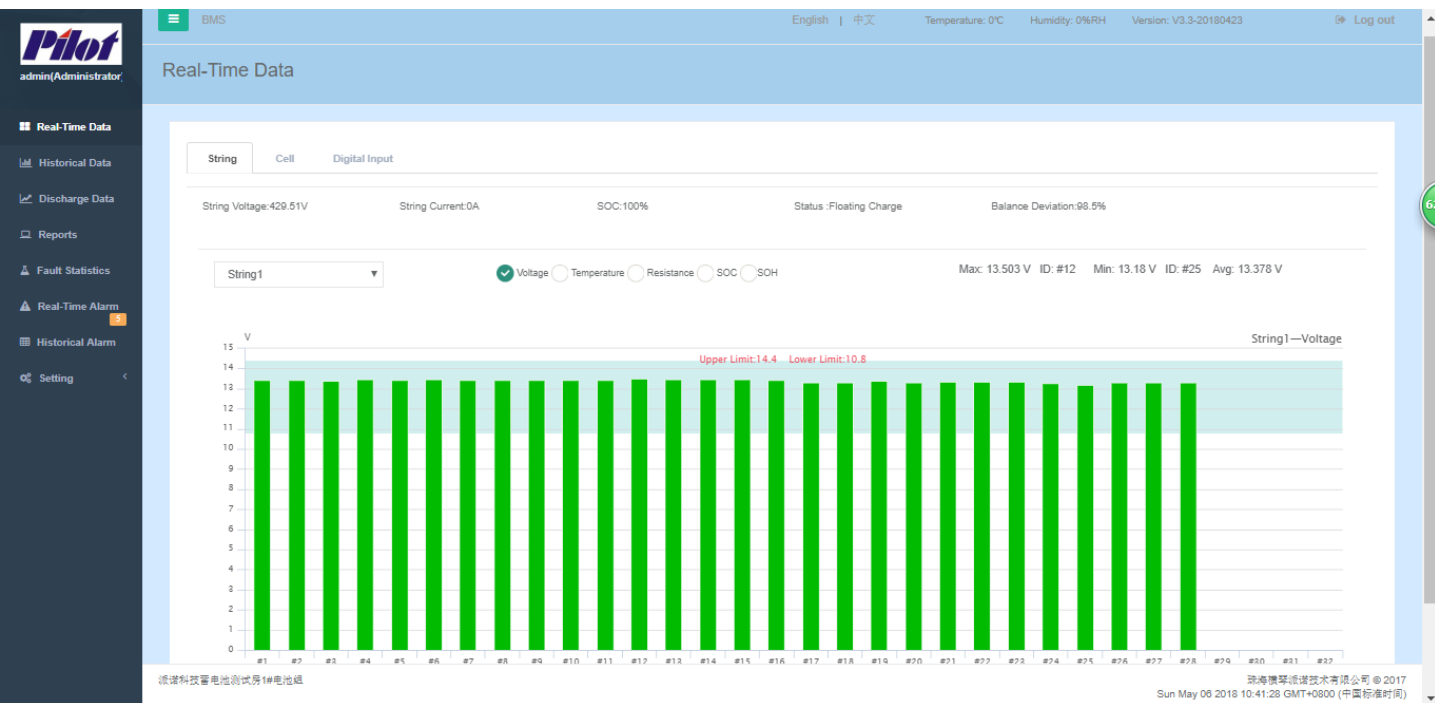


PILOT (HENGQIN) CO., LTD

Step1: Login the system

Use the "Chrome  " browser. Login to the gateway's web page. The default account is as follows:


Username: admin

Password: admin

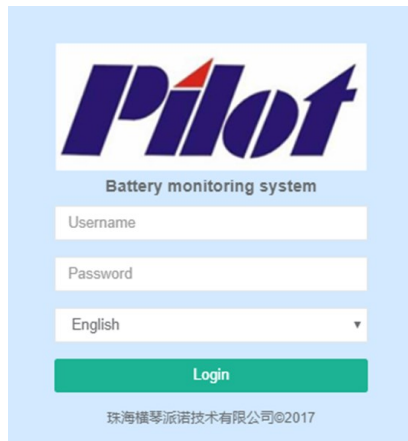


Step2: Gateway Firmware Upgrade


Click the left menu bar "Setting" -> "General Setting" -> "Gateway firmware upgrade" to display the gateway firmware upgrade page.

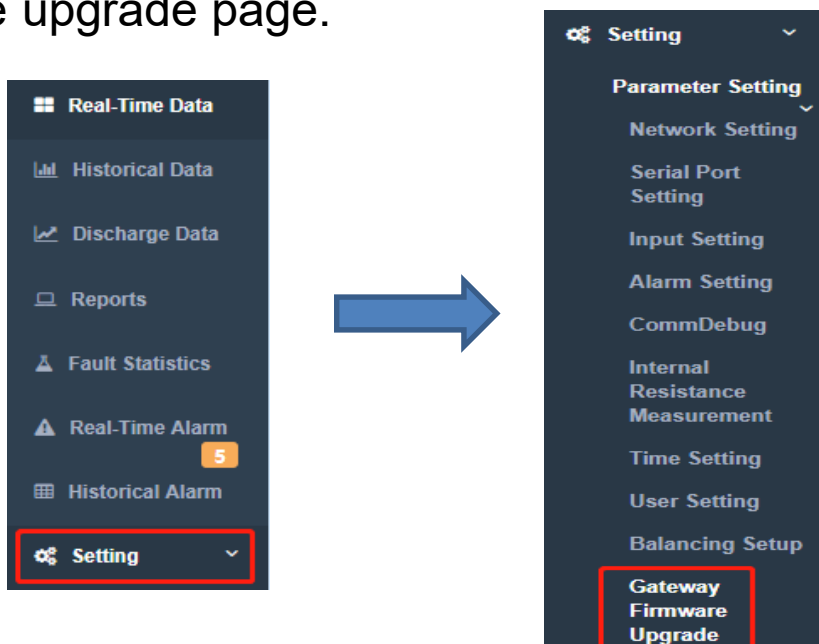

And then click **“Add File”**

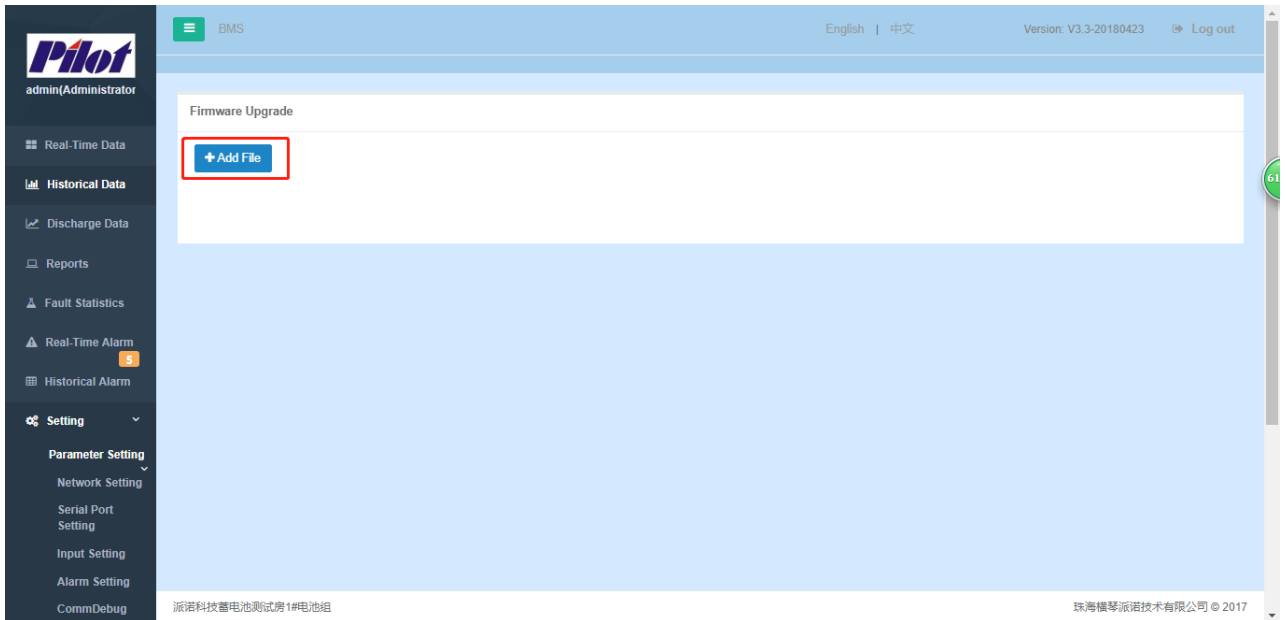



Then select the new version of the upgrade package, and click **“Open”** in the lower right corner.

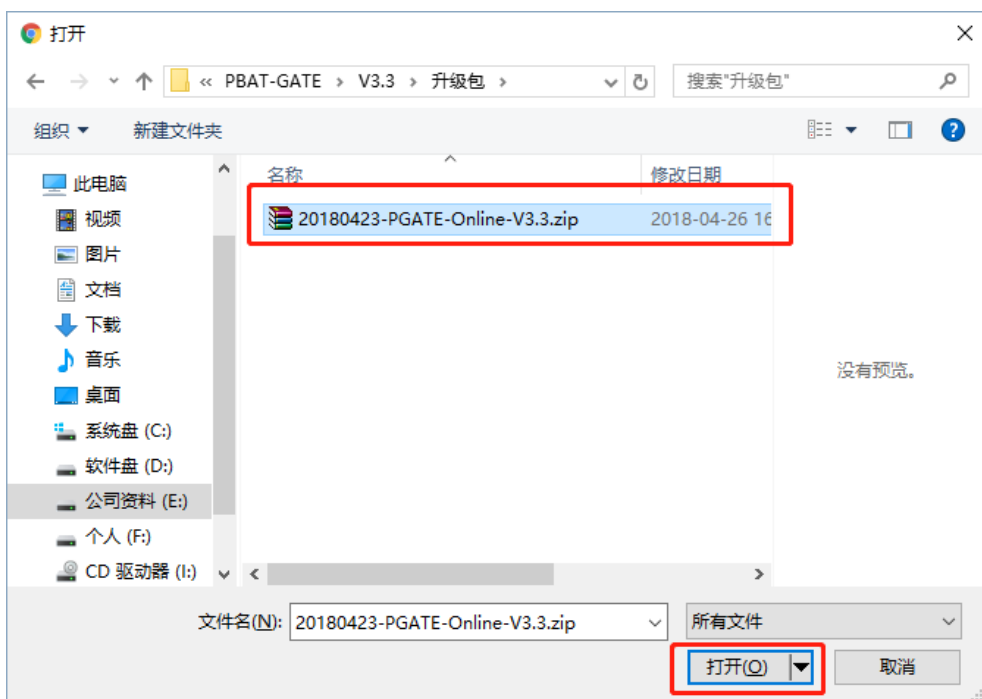

And then click “  ”.

Firmware Upgrade

[+ Add File](#)




20180423-PGATE-Online-V3.3.zip	16.31 MB		
--------------------------------	----------	---	---

Waiting for upgrade.

Firmware Upgrade

[+ Add File](#)


7.59 Mbit/s | 00:00:00 | 100.00 % | 16.31 MB / 16.31 MB

20180423-PGATE-Online-V3.3.zip	16.31 MB			
--------------------------------	----------	---	---	---


After the progress bar disappears, the upgrade is complete.

Step3: Clear browser cache

Use the "Chrome" browser,
then use shortcut keys: "Ctrl+H",
Select the "Clear browsing data"

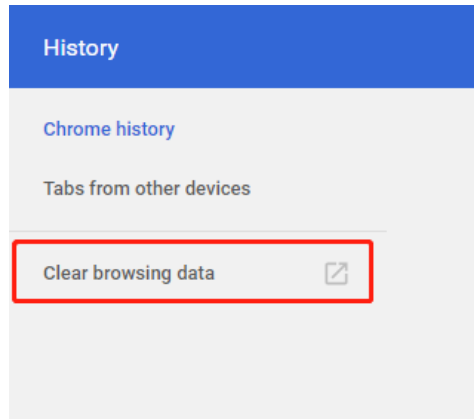

1. Select "Advanced"
2. Time range: All time
3. Select all items
4. Select "CLEAR DATA"

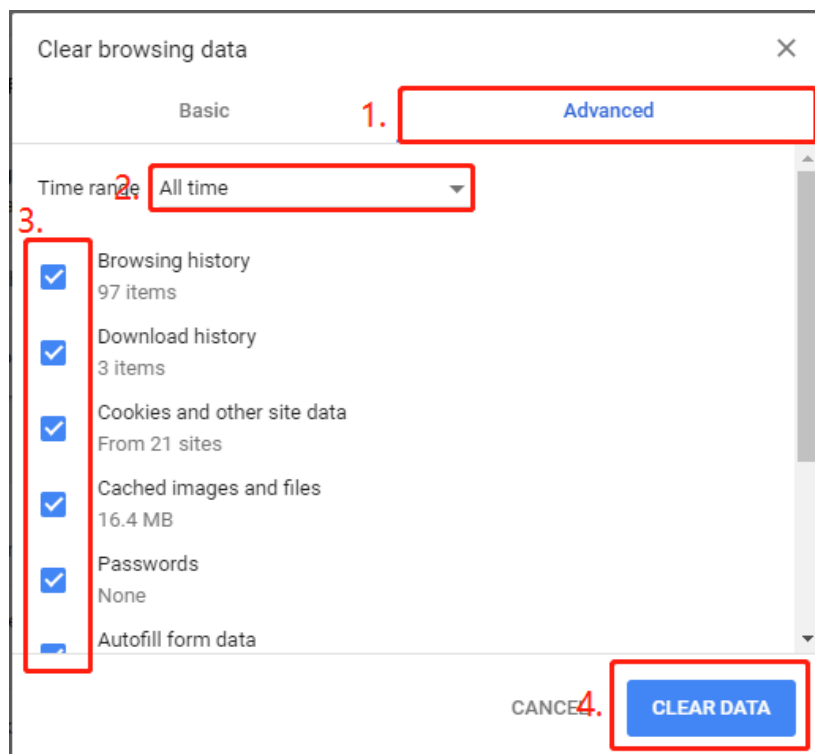

The upgrade is complete, log in to see the effect.

Thanks for watching!

Notice:

- PILOT reserves the right to modify this manual without prior notice in view of continued improvement
- Please use the "Chrome  " browser, system is not compatible with IE browser.
- Email: marketing@pmac.com.cn
systemtech@pmac.com.cn

PILOT (HENGQIN) CO., LTD

Add: No. 15, Keji 6 Road, Chuangxin Hai'an, Tangjia High-tech
Zone, Zhuhai, Guangdong, 519085 China

Tel: +86-756-3639029

Fax: +86-756-3631718

<http://en.pmac.com.cn>



Wechat Official Accounts