

S2500-C SERIES



Supports Maximum 24
GE TX Ports and 4 GE
SFP Uplink Ports



Advanced Hardware
Architecture and
Industry-leading Port
Density



Carrier-Level High
Reliability
Layer-3 Routing
Functions



Varied Service
Characteristics
Versatile IPv6
Solution Complete
Security Mechanism

Product Overview

BDCOM S2500-C Series is a new-generation intelligent gigabit access switch designed for carrier's IP MAN and enterprise networks. Based on the new-generation high-performance hardware and BDROS platform, it supports functions such as ACL, QinQ and QoS. Its simple management mode and flexible installation can meet the requirement of any complicated scenarios.

BDCOM S2500-C Series has 2 models: S2510-C and S2528-C

Product Characteristics

Carrier-Level Ethernet Access Switch

S2500-C Series supports the carrier-level Ethernet-
ring protection protocol with less than 50ms
recovery time, STP/RSTP/MSTP, backup uplink
ports, and LACP link aggregation to cater to the
requirements of high reliability of carriers;

S2500-C Series has powerful ACL functions to
access and control L2-L7 data based on physical
port, providing carriers flexible and various policy
control methods;

S2500-C Series supports In-Service Software
Upgrade (ISSU) to ensure the unremitting data
forwarding during system upgrade;

S2500-C Series supports various L2 multicast
functions such as IGMP-snooping, fast-leave and
MVR to fully meet the operation requirements of
carrier's IPTV.



Product Characteristics

Comprehensive IPv6 Solutions

S2500-C Series supports the IPv6 protocol suite, IPv6 neighbor discovery, ICMPv6 and Path MTU discovery.

S2500-C Series supports Ping, Traceroute, Telnet, SSH and ACL on the basis of IPv6, meeting IPv6 networks' equipment management requirements and service control requirements;

Enhanced QoS

S2500-C Series supports priority retagging and complicated flow classification based on VLAN, MAC, source address, destination address, IP or priority, better streamlining carrier's services.

S2500-C Series provides flexible bandwidth control policies, supporting port-/flow-based flow limit, ensuring the line speed forwarding of each port.

S2500-C Series supports multiple queue schedule algorithms such as SP, WRR and "SP + WRR".

Security+

Equipment-level security: The advanced hardware infrastructure design realizes the level-based packet schedule and packet protection, prevents DoS-/TCP-related SYN Flood, UDP Flood, Broadcast Storm or large traffic attacks, and supports level-based command line protection, endowing different levels of users with different management permissions.

Perfect security authentication mechanisms: IEEE 802.1x, Radius and BDTacacs+.

S2500-C Series supports storm/multicast/unicast limit, ensuring the normal running of equipment in harsh network conditions.

S2500-C Series supports perfect ring detection mechanism, ensuring the long-term stable running of network.

S2500-C Series supports port isolation within the same VLAN, DHCP-Snooping, and IP + MAC + Port binding.

Easy Management and Maintenance

S2500-C Series supports many management modes such as the CLI, Telnet, SSH, SSL and SNMP.

S2500-C Series supports the WEB management mode, which is easy and efficient for installing and debugging the device.

S2500-C Series supports FTP, TFTP and SFTP.

S2500-C Series supports ISSU (In-Service Software Upgrade).

S2500-C Series supports SNMP and BDCOM NMS smart network management platform. The combination realizes automatic equipment discovery, network topology management, equipment configuration management, performance data statistics and analysis and trouble management.

S2500-C Series supports Zero Touch Provisioning (ZTP) function to minimize manual operator intervention and helps reduce customers' initial deployment costs.

Model lists

S2510-C




- 8 GE TX port
- 2 100/1000M SFP ports

S2528-C



- 24 GE TX ports,
- 4 100/1000M SFP ports

Application Diagram

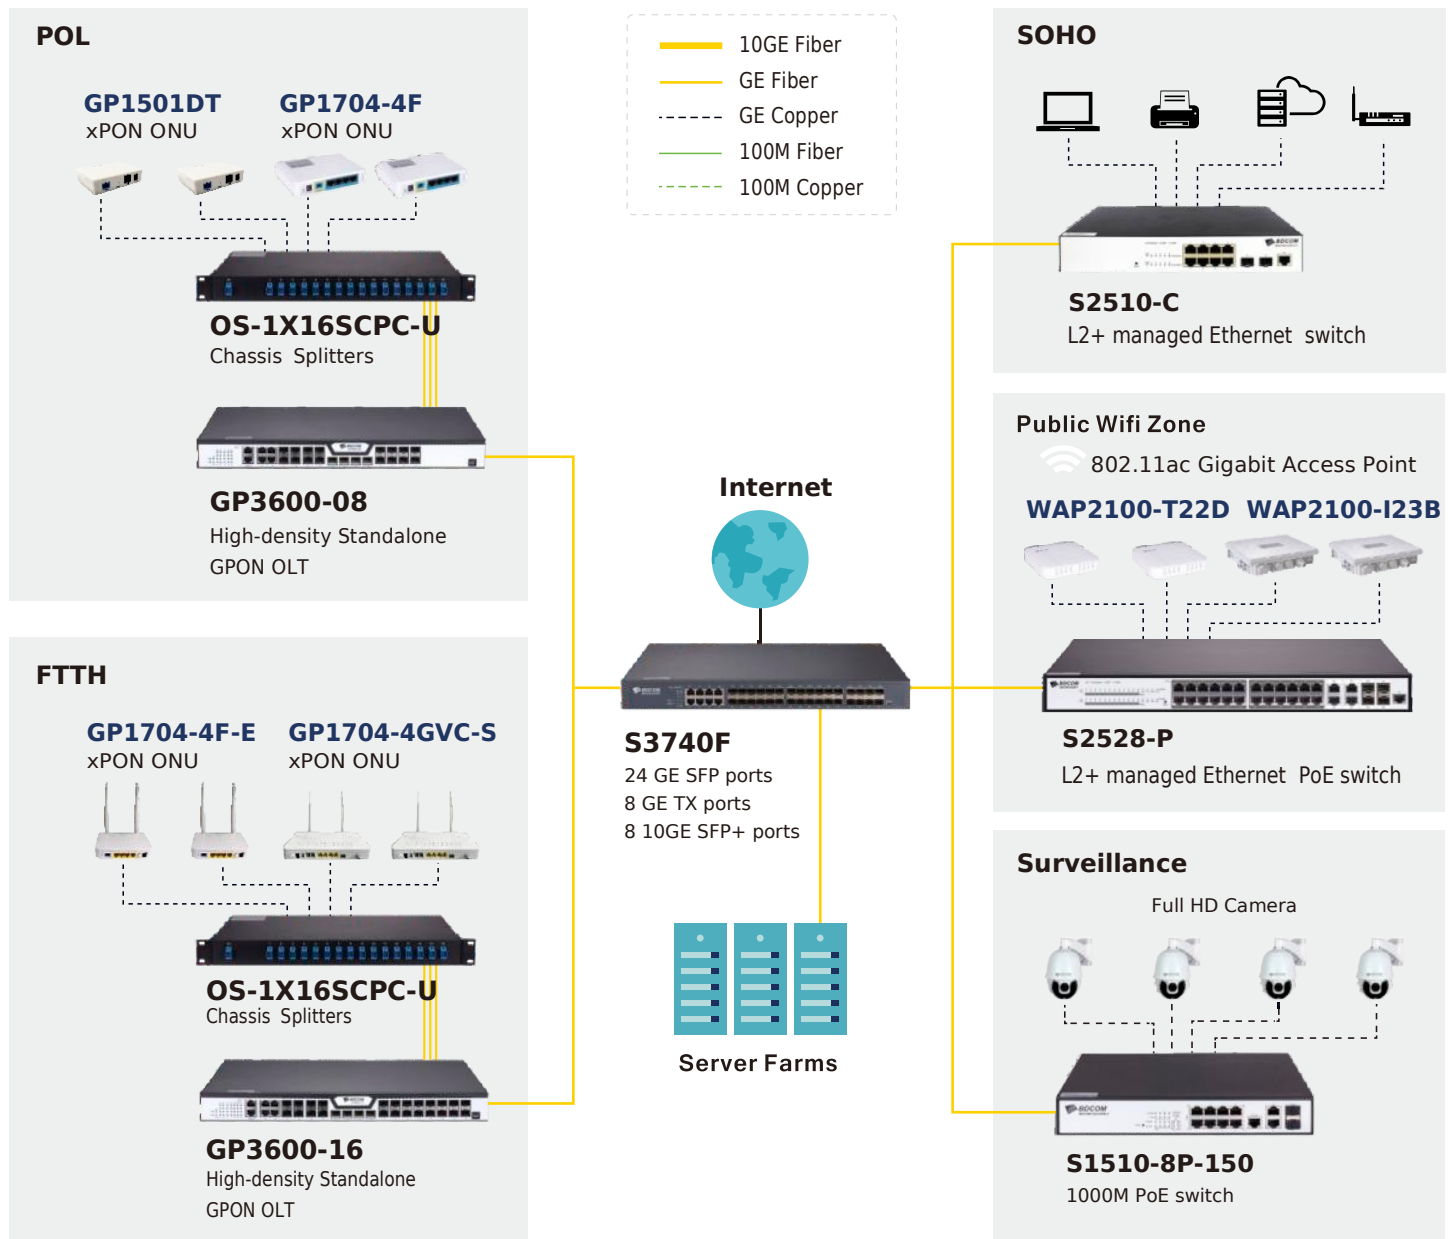

Product Specifications

Item	S2510-C	S2528-C	
Interface	8 GE TX ports, 2 100/1000M SFP ports	24 GE TX ports, 4 100/1000M SFP ports	
Console	1 RJ45 port, 1 RST button	1 RJ45 port, 1 RST button	
Backplane	20 Gbps	56 Gbps	
Forwarding rate	15 Mpps	42 Mpps	
Chassis	Dimensions (WxDxH)(mm)	280x180x44	440x210x44
	Weight(KG)(empty)	1.55	2
Package	Dimensions (WxDxH)(mm)	346x289x92	555x295x88
	Weight(KG)	2.55	3
Power consumption	no-load	<3W	<7W
	full-load	10W	20W
Power supply	AC: 100V-240V, 50Hz±10%	15W	25W
Total output BTU (1000BTU/H=293W)		51.19	85.32
Fan number		no	
Noise@25°C(dBA)		0	
MTBF(H)		>50,000	
Forwarding mode		Store-forward	
Flash (MB)		16	
DRAM (MB)		128	
MAC		8K	
Buffer size(MB)		4.1	
Jumbo frame		9K	
Total SVI		10	

Features

VLAN

- 4K Active VLAN
- QinQ & Selective QinQ
- GVRP, Private VLAN
- Voice VLAN

Spanning Tree

- 802.1Q(STP)
- 802.1W(RSTP) and 802.1S(MSTP)
- BPDU guard, root guard and loopback guard

Multicast

- IGMP v1/2/3
- IGMP Snooping
- IGMP Fast Leave
- IGMP Filter
- MVR

IP

- Static route
- RIP, OSPF
- 512 routing table
- IP v4/v6 dual stack
- DHCP Server/Client/Relay

QoS

- CAR, HQoS, MAC/IP/TCP/UDP/VLAN/COS/DSCP/TOS based
- QoS, 802.1P/DSCP priority re-labeling, SP, WRR, and "SP+WRR",
- Tail-Drop, WRED, flow monitoring and traffic shaping

Security

- Port isolation, Port security, and "IP+MAC+port binding, MAC sticky, DHCP Snooping and option 82, DAI & IP source guard, PPPoE+,
- IEEE 802.1X, Radius and BDTacacs+
- L2/L3/L4 ACL flow identification and filtration Anti- attack from DDoS, TCP's SYN Flood, UDP Flood, etc.
- Broadcast/multicast/unknown unicast storm- control
- MD5, SHA-256, RSA-1024, AES256, etc.

Reliability

- Static/LACP link aggregation, Interface backup
- EAPS and ERPS
- ISSU

Management

- Console, Telnet, SSH v1/2, HTTP, HTTPS, SNMP v1/v2/v3, RMON
- TFTP, FTP, SFTP
- NTP
- ZTP (Zero Touch Provisioning)
- SPAN, RSPAN

Accessories

- Power cord, rackmount kits, console cable, anti-slipping pad

Environment

- Operating temperature/humidity: 0°C -50°C, 10%-90% non-condensing
- Storage temperature/humidity: -20°C -70°C, 5%-95% non-condensing

Certification

- CE, FCC, ROHS

BDCOM S2500-C Series

Ordering Information

Item	Description
S2500-C Series switch	
S2510-C	Ethernet switch with 8 GE TX ports and 2 GE SFP ports (1 console port, 8 GE TX ports, 2 100/1000M SFP ports, 1 standard AC220V power supply, fanless, 1U, desktop installation)
S2528-C	Ethernet switch with 24 GE TX ports and 4 GE SFP ports (1 console port, 24 GE TX ports, 4 100/1000M SFP ports, 1 standard AC220V power supply, fanless, 1U, 19-inch rack-mounted installation)
Optical Modules	
100M Optical Modules	
FSFP-SX-1310	100M SFP multi-mode (2Km, 1310nm, LC, DDM)
FSFP-LX-15	100M SFP single-mode (15Km, 1310nm, LC, DDM)
FSFP-LX-40	100M SFP single-mode (40Km, 1310nm, LC, DDM)
FSFP-ZX-80	100M SFP single-mode (80Km, 1550nm, LC, DDM)
FSFP-LX-SM1310-20-BIDI	100M SFP single-mode, single fiber (20Km, TX1310/RX1550, LC, DDM)
FSFP-LX-SM1550-20-BIDI	100M SFP single-mode, single fiber (20Km, TX1550/RX1310, LC, DDM)
FSFP-LX-SM1310-40-BIDI	100M SFP single-mode, single fiber (40Km, TX1310/RX1550, LC, DDM)
FSFP-LX-SM1550-40-BIDI	100M SFP single-mode, single fiber (40Km, TX1550/RX1310, LC, DDM)
FSFP-LX-SM1310-80-BIDI	100M SFP single-mode, single fiber (80Km, TX1310/RX1550, LC, DDM)
FSFP-LX-SM1550-80-BIDI	100M SFP single-mode, single fiber (80Km, TX1550/RX1310, LC, DDM)
GE Optical Modules	
GSFP-TX-B	GE SFP-to-RJ45 module
GSFP-SX-D	GE SFP multi-mode(500m,850nm,LC,DDM)
GSFP-LX-10-D	GE SFP single-mode(10Km,1310nm,LC,DDM)
GSFP-LX-20-D	GE SFP single-mode (40Km, 1310nm, LC, DDM)
GSFP-LX-40-D	GE SFP single-mode (40Km, 1310nm, LC, DDM)
GSFP-ZX-80-D	GE SFP single-mode (80Km, 1550nm, LC, DDM)
GSFP-ZX-120-D	GE SFP single-mode (120Km, 1550nm, LC, DDM)
GSFP-LX-SM1310-10-BIDI	GE SFP single-mode, single fiber (10Km, TX1310/RX1550, LC, DDM)
GSFP-LX-SM1550-10-BIDI	GE SFP single-mode, single fiber (10Km, TX1550/RX1310, LC, DDM)
GSFP-LX-SM1310-20-BIDI	GE SFP single-mode, single fiber (20Km, TX1310/RX1550, LC, DDM)
GSFP-LX-SM1550-20-BIDI	GE SFP single-mode, single fiber (20Km, TX1550/RX1310, LC, DDM)
GSFP-LX-SM1310-40-BIDI	GE SFP single-mode, single fiber (40Km, TX1310/RX1550, LC, DDM)
GSFP-LX-SM1550-40-BIDI	GE SFP single-mode, single fiber (40Km, TX1550/RX1310, LC, DDM)
GSFP-LX-SM1490-80-BIDI	GE SFP single-mode, single fiber (80Km, TX1490/RX1550, LC, DDM)
GSFP-LX-SM1550-80-BIDI	GE SFP single-mode, single fiber (80Km, TX1550/RX1490, LC, DDM)
GSFP-LX-SM1490-120	GE SFP single-mode, single fiber (120Km, TX1490/RX1550, LC, DDM)
GSFP-LX-SM1550-120	GE SFP single-mode, single fiber (120Km, TX1550/RX1490, LC, DDM)

Copyright © Shanghai Baud Data Communication Co., Ltd. 2019. All Rights Reserved.

This document is BDCOM Public Information. BDCOM reserves the right to alter, update and otherwise change the information contained in the document from time to time.
www.bdcom.cn

